

Pumper, PUC

BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

505 HP DD13 Engine

TRANSMISSION

Allison 5th Gen, 4000 EVS P

BUMPER

10" Extended Stainless Steel

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

39.50" FF RollUp Rear Compt w/ Space Saver, PUC

COMPT, PUMPER, LEFT SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

(2) 1.50", Poly Trays, 200'

CROSSLAYS, 2.50"

(1) 2.50", Poly Tray, 200'

GENERATOR

Harrison 6kW MCR Hydraulic Generator

Foam System

Husky 12 Dual Agent Foam System

Foam Cell

20 Gallon Foam Cell, Not Reduced Water, PUC

30 Gallon Foam Cell, Not Reduced Water, PUC


Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AUTOMATIC TIRE CHAINS
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE OF THE CAB
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR DISPLAYED THROUGH DRIVER SIDE WINDOW
6. EIGHT ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. TWO SWING-OUT TOOLBOARDS LOCATED PER SHOP ORDER
9. HANNAY BOOSTER REEL SBEF34-23-24 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE LOCATED IN COMPARTMENT B1

10. SIX 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER
11. ONE 240V RECEPTACLE LOCATED PER SHOP ORDER
12. TWO HANNAY COORD REELS MODEL E1618-17-18 WITH 200' OF 10/3 CABLE LOCATED HATCH COMPARTMENTS PER SHOP ORDER
13. CIRCUIT BREAKER PANEL LOCATED PER SHOP ORDER
14. FOUR FIRE EXTINGUISHER STORAGE BINS LOCATED PER SHOP ORDER
15. FOUR ZICO SCBA BRACKETS LOCATED PER SHOP ORDER
16. ONE 120V 6-PLACE RECEPTACLE STRIP LOCATED PER SHOP ORDER
17. ZICO TURNTABLE TOOL MOUNT LOCATED PER SHOP ORDER

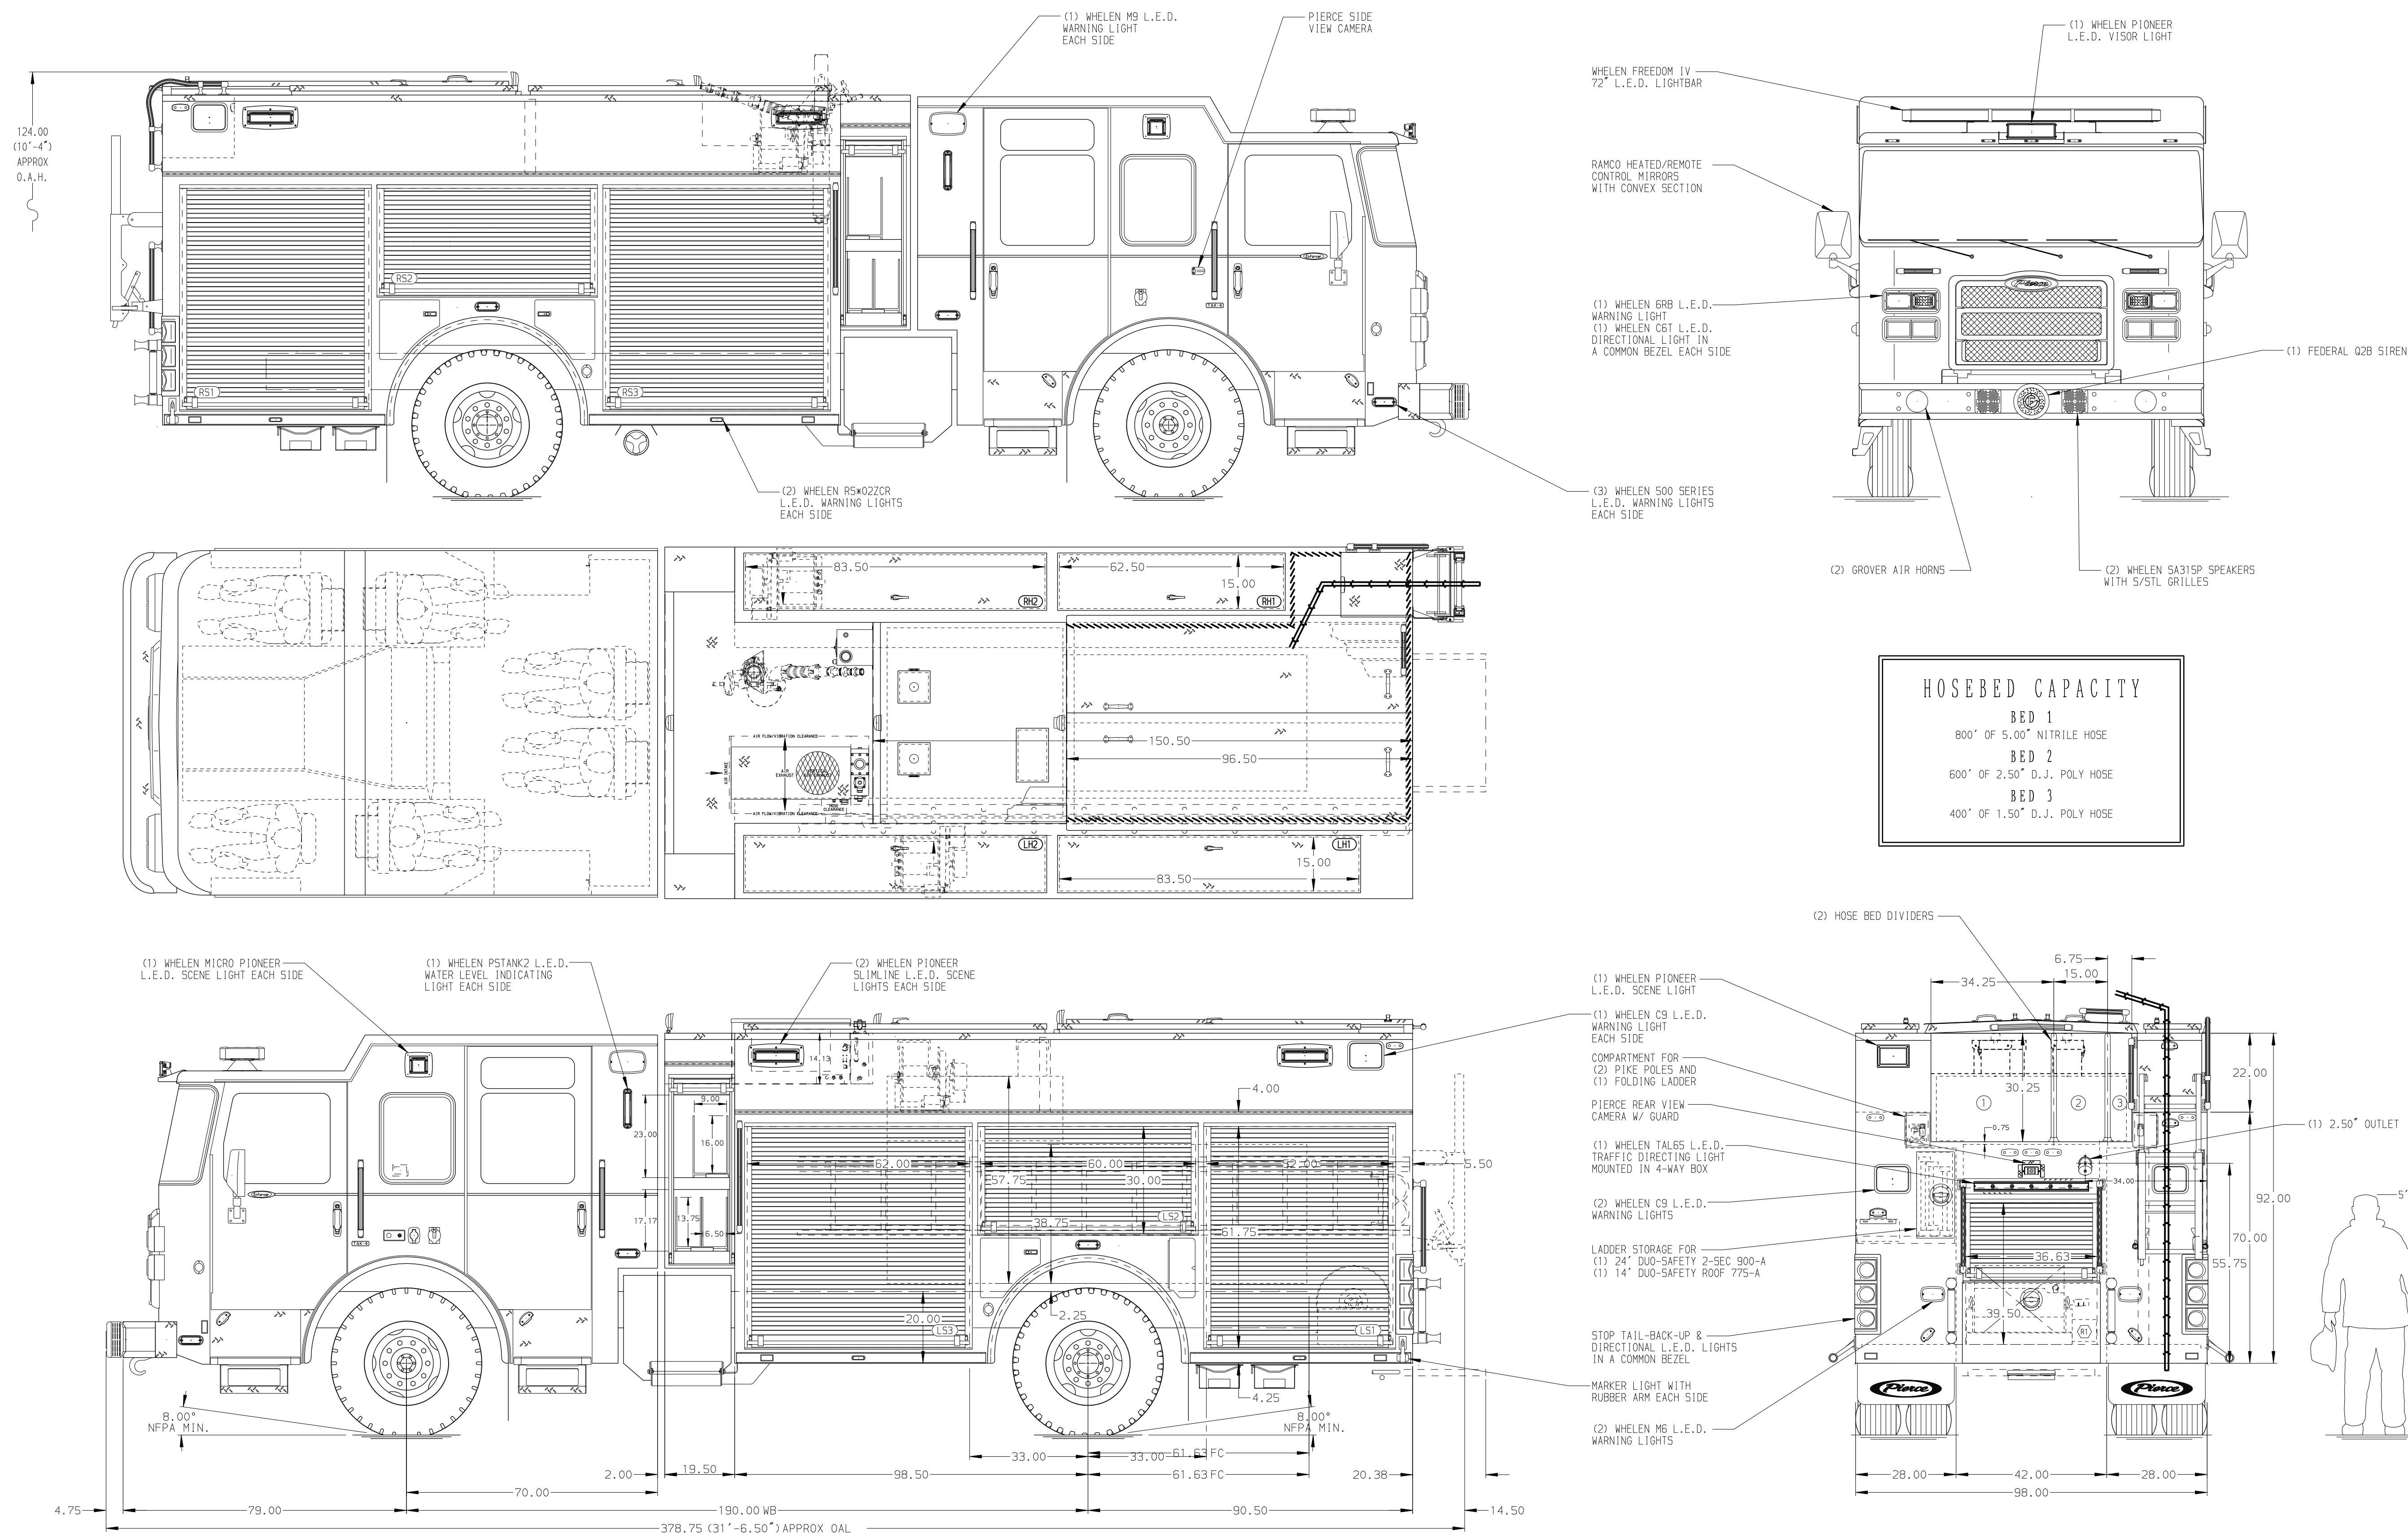

HOSEBED CAPACITY	
BED 1	800' OF 5.00" NITRILE HOSE
BED 2	600' OF 2.50" D.J. POLY HOSE
BED 3	400' OF 1.50" D.J. POLY HOSE

		JOB NO.	34856
		SCALE	DATE
TITLE	Pierce PUC Pumper Approval Drawing	DRAWN BY	COL
FOR	Athens Fire Department	CHECKED BY	NPE
DWG NO.	34856AD	SHEET SIZE	SHEET NO.
ENFORCER		D	1 OF 1

REV	DATE	BY	CH	ENFORCER
14SEP20	COL	CW1	MAKE	
27MAY20	COL	CW1	PIERCE	
22APR20	COL	CW1	MODEL	