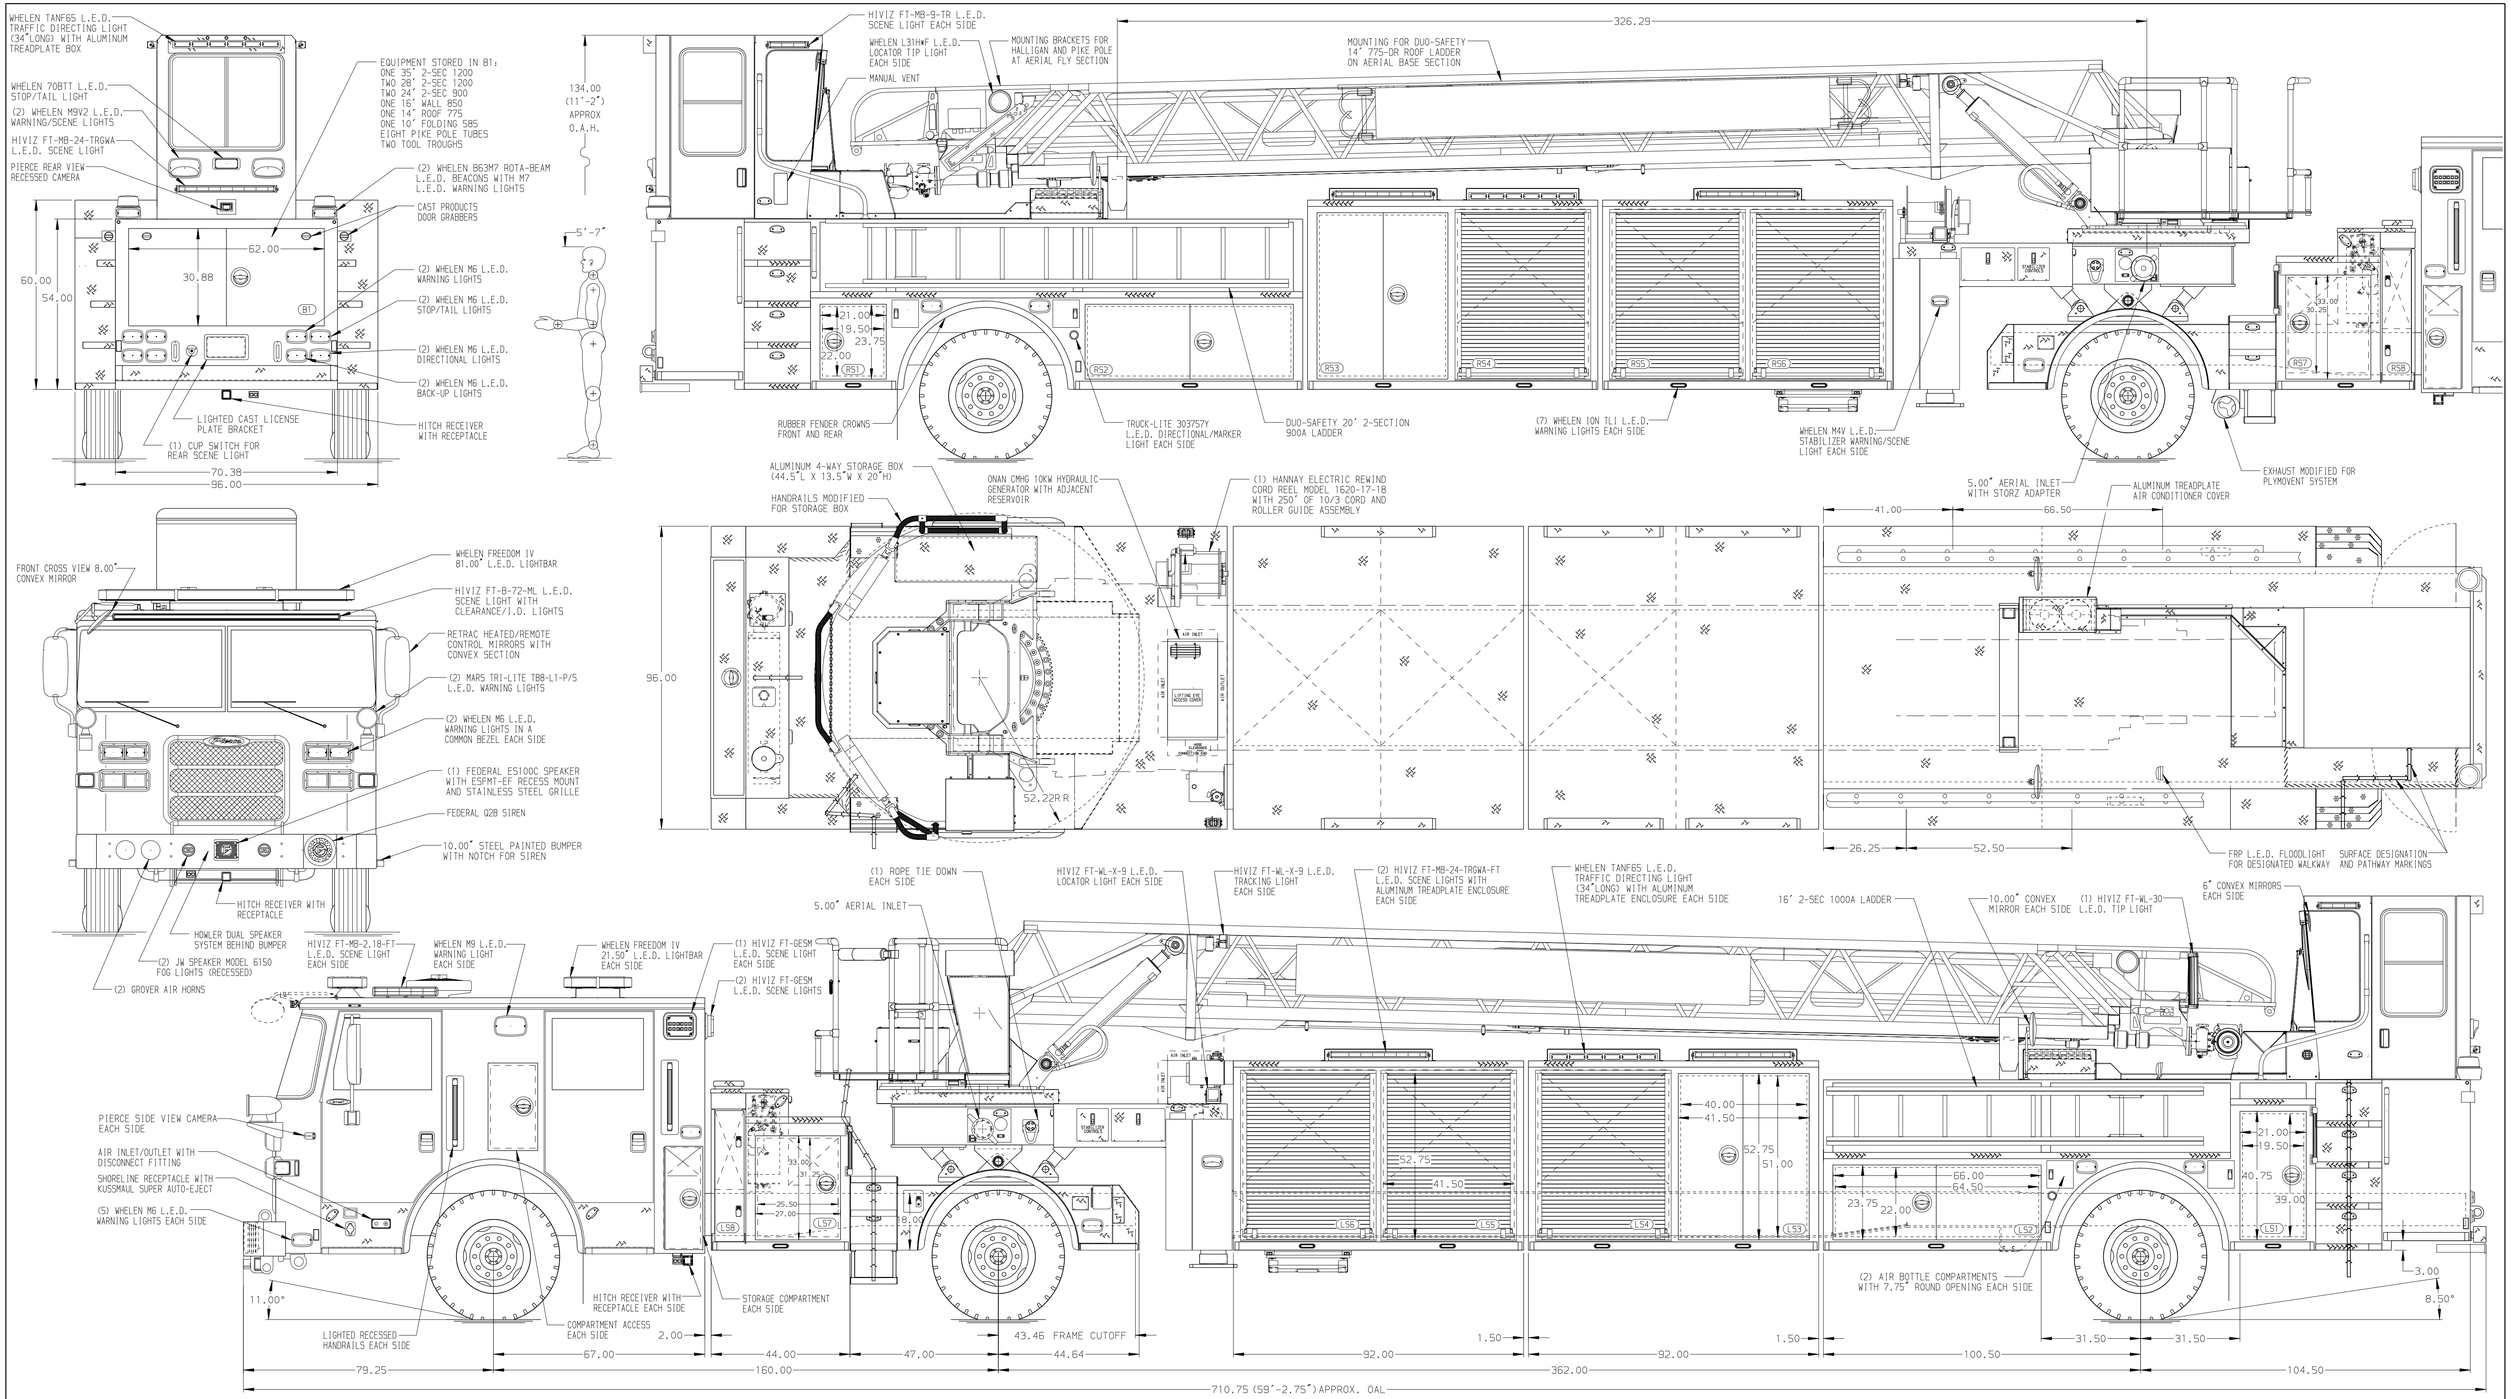

ALUMINUM BODY | MAX O.A.L. 696.00" | MAX O.A.H. 134.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
2. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
3. BATTERY CHARGER INDICATOR LOCATED AT DRIVER'S SIDE STEP AREA
4. TWO ADJUSTABLE 2-WAY SLIDE-OUT TRAYS WITH 4" SIDES IN COMPARTMENTS PER SHOP ORDER
5. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
6. TWO ADJUSTABLE (FULL TRANS) SHELVES IN COMPARTMENTS PER SHOP ORDER
7. TWO ADJUSTABLE (1/2 TRANS) SHELVES IN COMPARTMENTS PER SHOP ORDER
8. TWO ADJUSTABLE SLIDE-OUT (1/2 TRANS) TRAYS IN COMPARTMENTS PER SHOP ORDER
9. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1620-17-18 WITH 250' OF 10/3 CABLE AND CAPTIVE ROLLER GUIDE IN COMPARTMENT PER SHOP ORDER
10. CIRCUIT BREAKER PANEL IN COMPARTMENT PER SHOP ORDER
11. TRIDENT FOLDING STEPS ON AERIAL DEVICE
12. L.E.D. LIGHTING ON AERIAL LADDER SECTIONS
13. 120V POWER TO AERIAL TIP
14. 2-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP AND TURNTABLE
15. WIRELESS CAMERA LOCATED AT AERIAL EGRESS
16. LYFEPULLEY RESCUE SYSTEM AT AERIAL TIP
17. REMOTE MONITOR CONTROLS AT PUMP PANEL
18. WHEEL CHOCKS SHIPPED LOOSE
19. MOUNTING BRACKET FOR HYD POWER SUPPLY LOCATED PER SHOP ORDER
20. ONE 240V RECEPTACLE LOCATED IN COMPARTMENT PER SHOP ORDER
21. TWO HOLMATRO DHR10DC HYDRAULIC REELS LOCATED IN COMPARTMENTS PER SHOP ORDER
22. TWO MANUAL ROOF VENTS IN TILLER CAB ROOF
23. BOOM SUPPORT RAISED 2.00"
24. FOUR 4-PLACE 120V RECEPTACLES IN CAB PER SHOP ORDER
25. TWO 120V RECEPTACLES LOCATED PER SHOP ORDER
26. TWO EQUIPMENT RACK TROUGHS IN COMPARTMENT PER SHOP ORDER
27. SIX PIKE POLE TUBES IN COMPARTMENTS PER SHOP ORDER

REV	DATE	BY	CH
V	14JULY20	LWE	JBL
V	03JUN20	LWE	KBO
V	06MAR20	SHU	JBL

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT
DWG NO.: 34896AD-SH1

Pierce MANUFACTURING INC.

TITLE: 107' ASCENDANT AERIAL TILLER AND BODY ASSY
NO PUMP/NO TANK

FOR: BALTIMORE COUNTY MARYLAND
GLEN ARM, MARYLAND

JOB NO.	34896 01-03
SCALE	1:24
DATE	
DRAWN BY	SHU 03MAR20
CHECKED BY	JBL 4MAR20
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 17-JUL-2020 12:03:32