


## DIMENSIONS



## S3305-B-12-0.875-630 T-Shape Pull Handle

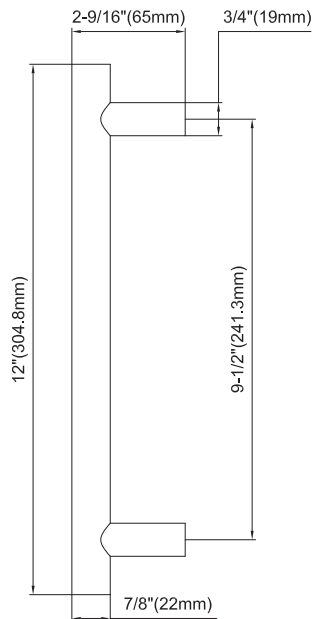

## SPECIFICATIONS

<b>Tube Diameter</b>	7/8" (22mm)
<b>Center to Center</b>	9-1/2" (241mm)
<b>Total Length</b>	12" (305mm)
<b>Fixing</b>	Back-to-Back
<b>Finish</b>	32D Satin Stainless Steel

## APPLICATION


Pull Handles cover a wide range of applications in both commercial and residential door industry. Whether it's a glass, wood, composite, aluminum or hollow metal door, we have a selection of fixing methods to suite nearly every application.

## CODE COMPLIANCE



- ANSI/BHMA A156.6 - J401, J402, J406
- ANSI A117.1 ADA for barrier free accessibility
- C-UBC California Amended Uniform Builders Code
- NFPA 80 National Fire Protection-Fire Door Assembly
- NFPA 101 National Fire Protection-Life Safety
- ANSI/BHMA A156.18 Finishes

## DIMENSIONS

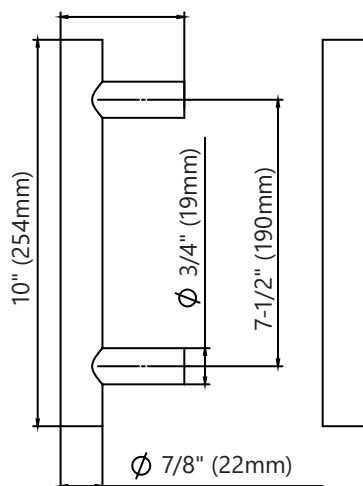

## S3305-B-10-0.875-630\* T-Shape Pull Handle



## SPECIFICATIONS

<b>Tube Diameter</b>	7/8" (22mm)
<b>Center to Center</b>	7-1/2" (190mm)
<b>Total Length</b>	10" (254mm)
<b>Fixing</b>	Back-to-Back
<b>Finish</b>	32D Satin Stainless Steel

\*Part Number TBD

## APPLICATION

Pull Handles cover a wide range of applications in both commercial and residential door industry. Whether it's a glass, wood, composite, aluminum or hollow metal door, we have a selection of fixing methods to suite nearly every application.

## CODE COMPLIANCE



- ANSI/BHMA A156.6 - J401, J402, J406
- ANSI A117.1 ADA for barrier free accessibility
- C-UBC California Amended Uniform Builders Code
- NFPA 80 National Fire Protection-Fire Door Assembly
- NFPA 101 National Fire Protection-Life Safety
- ANSI/BHMA A156.18 Finishes