

PUMPER BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
18,000 Lb Dana Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
380 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
19" Extended Stainless Steel

CAB
7010 Enforcer Cab

BODY WATER TANK

500 Gallon New York Style Water Tank
COMPT, PUMPER, REAR
30.75" FF RollUp, 25.88" Deep Flush Rear Compt

COMPT, PUMPER, LEFT SIDE
161" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER, RIGHT SIDE
161" RollUp Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE

56" Control Zone Top Mount

PUMP

1750 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Tray Std. Capacity

GENERATOR

Generator Not Required

Foam System
Foam System Not Required


Foam Cell
Foam Cell Not Required

Fronal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE LOCATED IN DRIVER'S STEP WELL
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- THREE ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
- THREE 2100 S284 BRACKETS LOCATED PER SHOP ORDER
- PARTITIONS BETWEEN COMPARTMENTS L51/B1 & R51/B1
- ALUMINUM PEGBOARD LOCATED PER SHOP ORDER
- XANTREX PROSINE INVERTER LOCATED PER SHOP ORDER

11. SEVEN 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

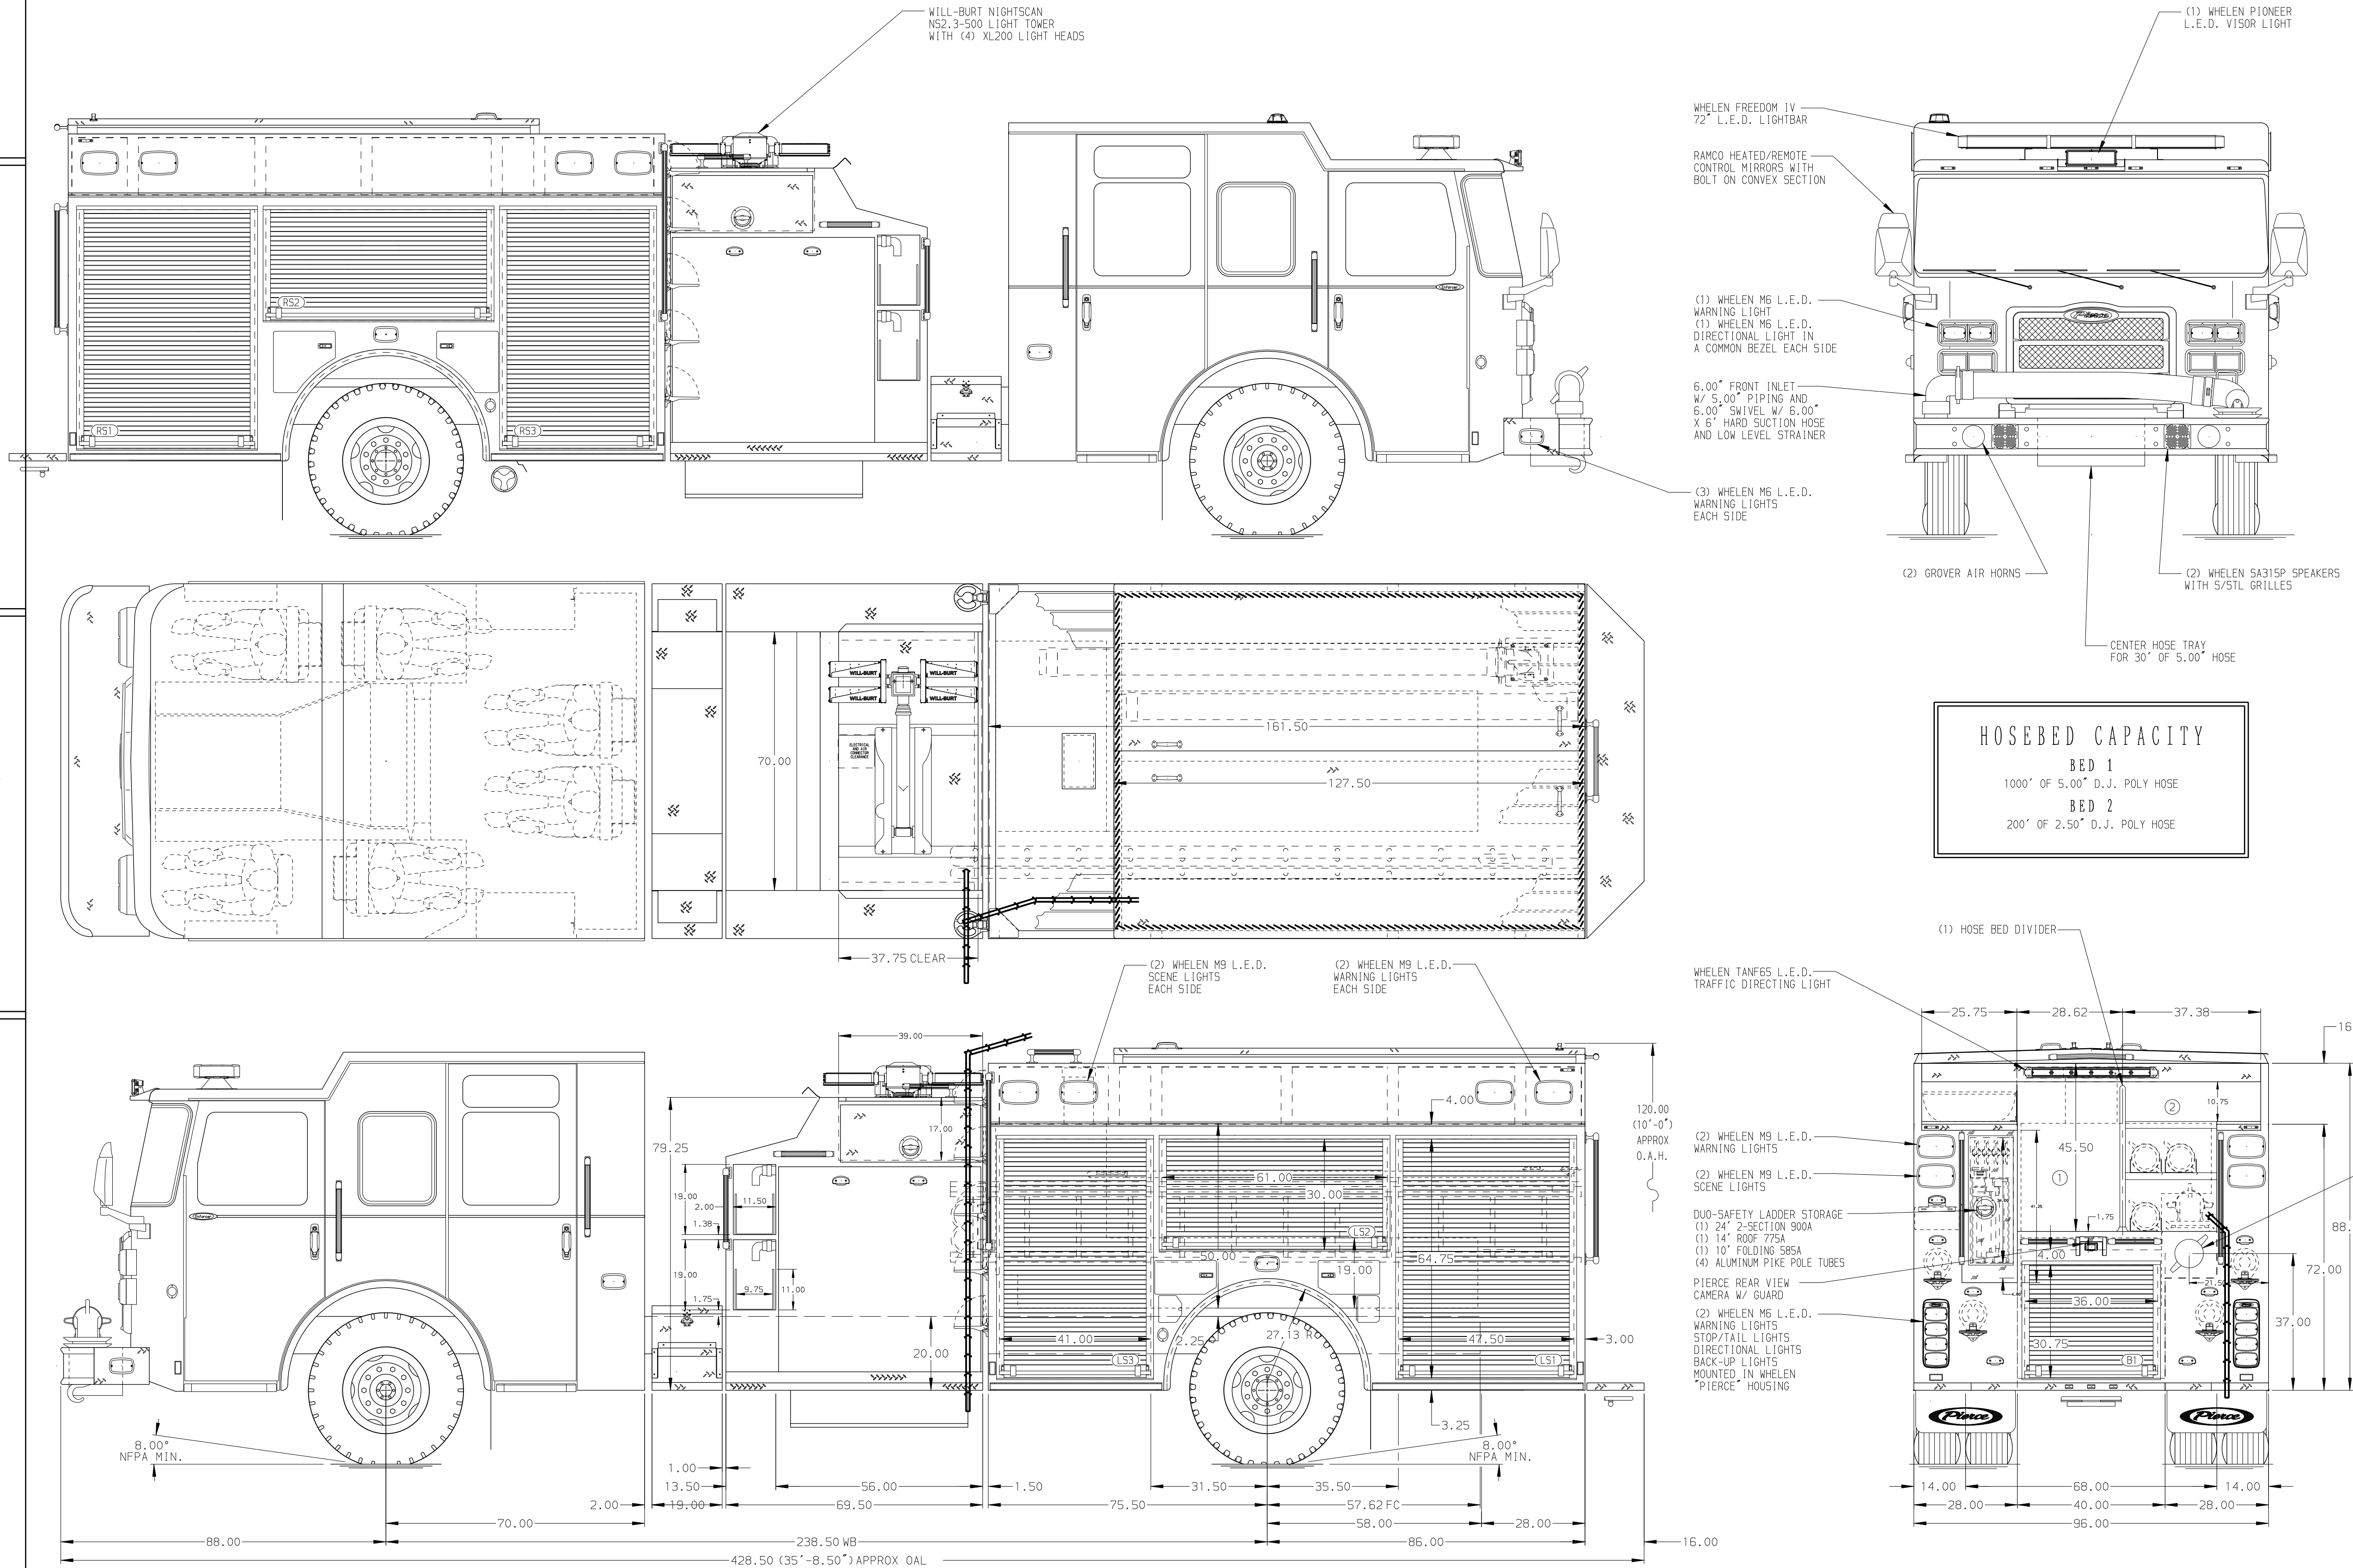

		JOB NO.	35006
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing		
FOR	Fredonia Fire Department		
DWG NO.	35006AD		
REV	DATE	BY	CH
16JUN20	COL	PJP	PIERCE
04MAY20	COL	NPE	MODEL
			ENFORCER
CHECKED BY	NPE		
DRAWN BY	COL		
SHEET SIZE	SHEET NO.		
D	1 OF 1		