PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
18,000 Lb TAK-4 Axle

AXLE, REAR
24,000 Lb Dana Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
500 Gallon Poly Water Tank

COMPT, PUMPER, REAR
37.75" FF Rollup, 25.88" Deep Flush Rear Compt

COMPT, PUMPER, LEFT SIDE
152" Rollup Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE
152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
50" Control Zone Side Mount

PUMP
1500 GPM Hale QMAX

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

Foam System
Husky 3 Single Agent Foam System

Foam Cell
20 Gallon Foam Cell, Not Reduced Water

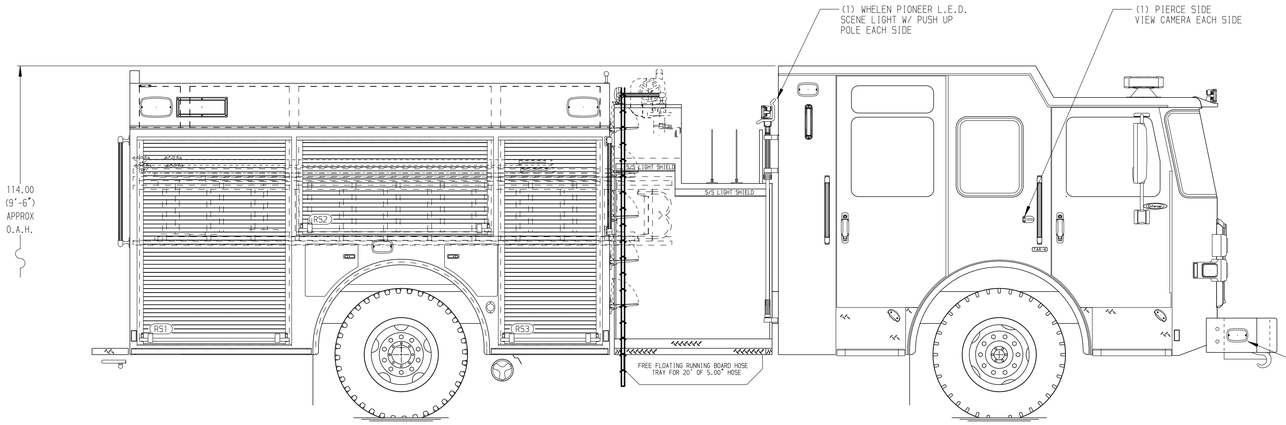

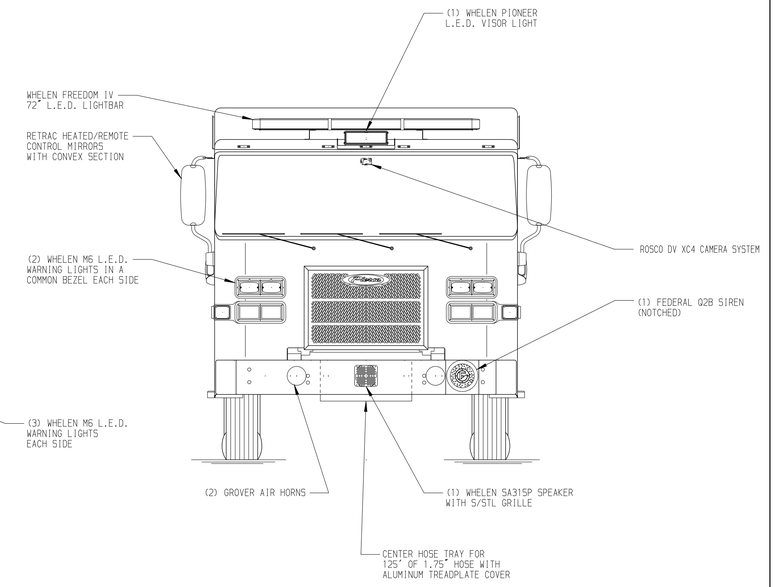

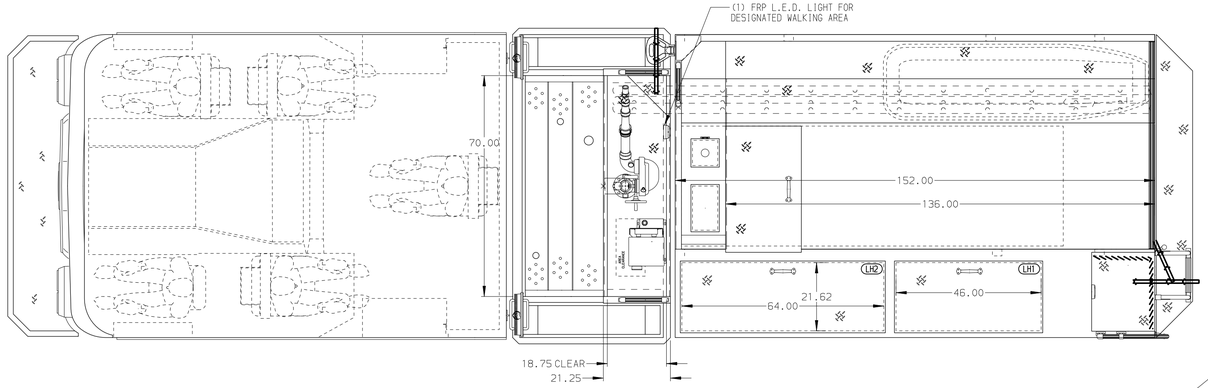

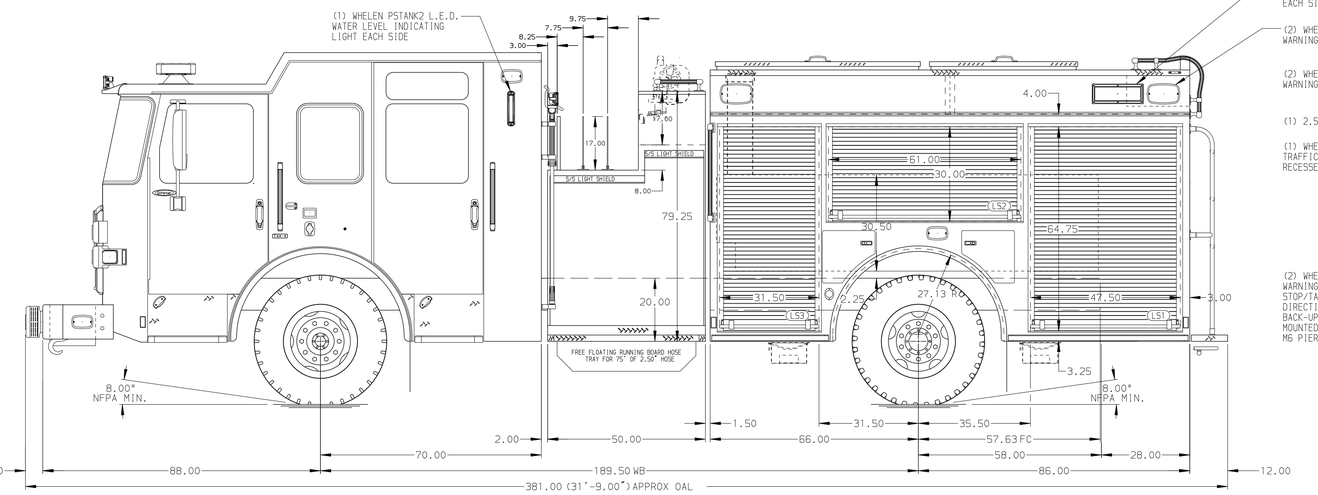

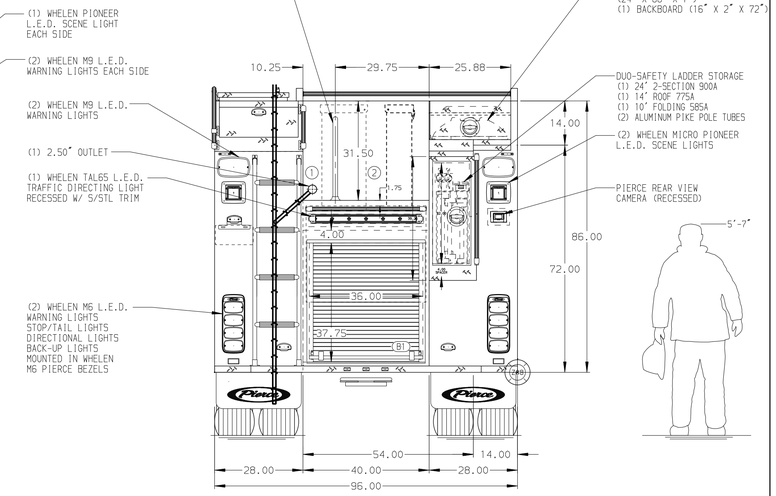

HOSEBED CAPACITY

BED 1
500' OF 2.50" D.J. POLY HOSE

BED 2
1300' OF 5.00" NITRILE HOSE

MAXIMUN O.A.H. 120.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. 120V SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF CAB
3. AIR INLET WITH KUSSMAUL AUTO EJECT LOCATED ON DRIVER SIDE OF CAB
4. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DRIVER SIDE PUMP PANEL
5. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
6. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF CAB
7. SEVEN ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
8. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
9. ONE TILTING/SLIDE-OUT TRAY LOCATED PER SHOP ORDER
10. ONE SLIDE-OUT TOOLBOARD LOCATED PER SHOP ORDER
11. ONE VERTICAL PARITION LOCATED PER SHOP ORDER
12. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
13. TWO 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER
14. ALUMINUM PEGBOARD LOCATED PER SHOP ORDER
15. SLIDE-OUT OIL DRY HOPPER COMPARTMENT PS REAWARD FENDER PANEL

REV	DATE	BY	CH
3	08SEP20	MMF	CSH
2	04AUG20	MMF	CSH

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

JOB NO.	35246
SCALE	1:24
DATE	
TITLE	Pierce Pumper Approval Drawing -
FOR	Orange Beach Fire Department
DRAWN BY	MMF
DATE	16JUN20
CHECKED BY	NPE
DATE	18JUN20
DWG NO.	35246AD
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 08-SEP-2020 11:35:42