PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
18,000 lb Dana Axle

AXLE, REAR
27,000 lb Dana Axle

ENGINE
455 HP Cummins X12 Engine

TRANSMISSION
Allison 5th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
161" Rollup Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE
161" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
45" Control Zone Side Mount

PUMP
1500 GPM Hale QMAX

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

Foam System
Akron Eductor Foam System

Foam Cell
30 Gallon Foam Cell, Not Reduced Water

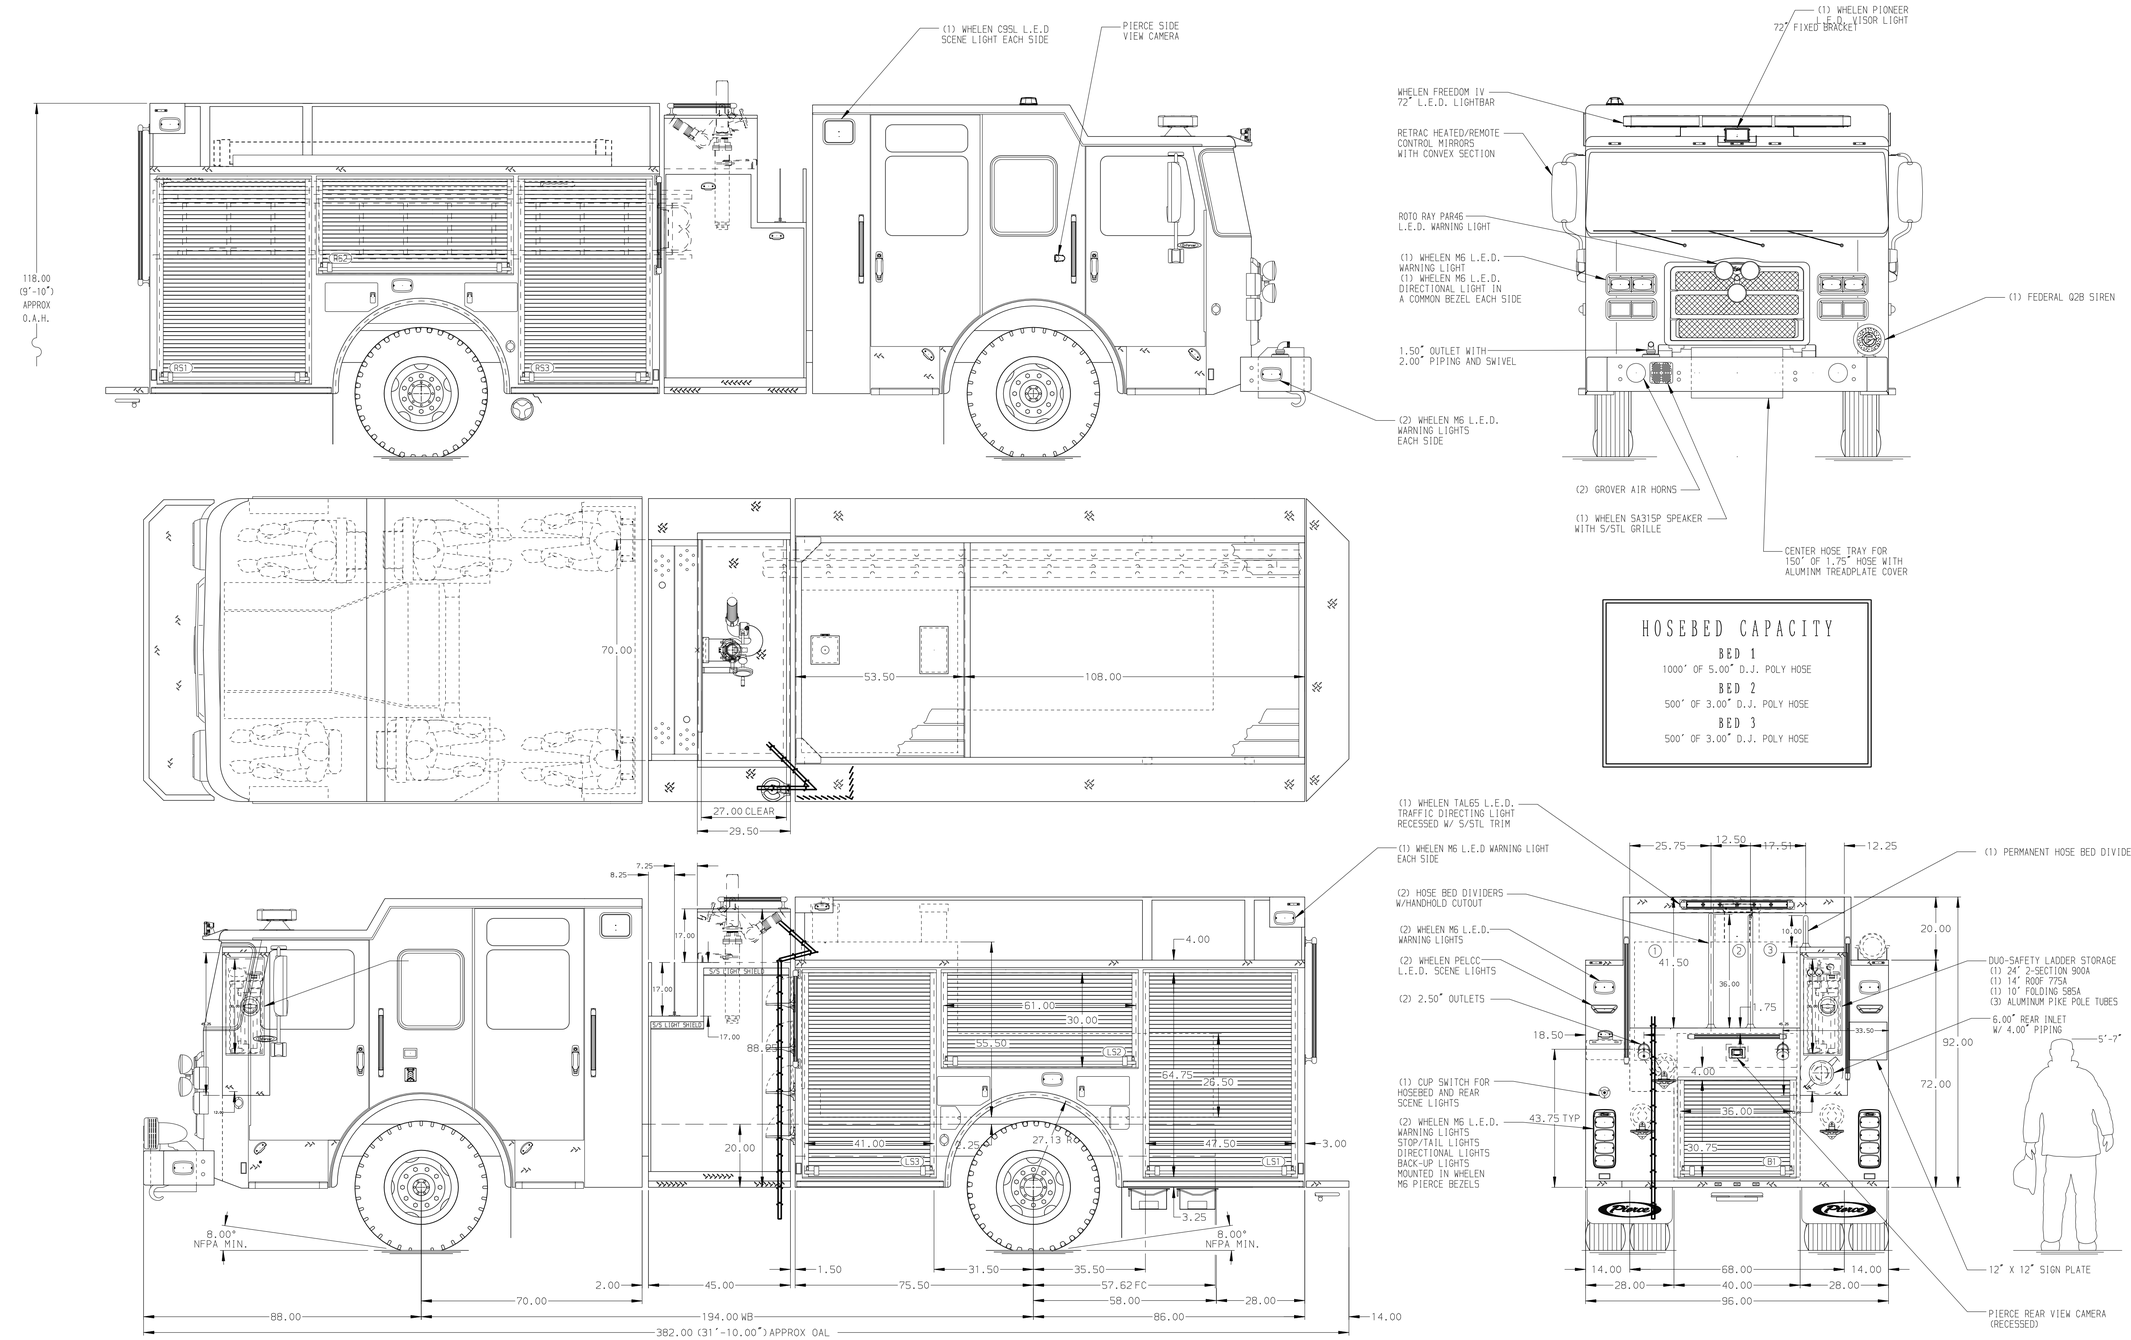

HOSEBED CAPACITY

BED 1
1000' OF 5.00" D.J. POLY HOSE

BED 2
500' OF 3.00" D.J. POLY HOSE

BED 3
500' OF 3.00" D.J. POLY HOSE

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BLUE SEA SURE EJECT SHORELINE RECEPTACLE LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
3. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
4. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE ABOVE FRONT TIRE
5. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
6. ALUMINUM PEGBOARD LOCATED PER SHOP ORDER
7. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER

REV	DATE	BY	CH		
E	23FEB21	MMF	COL	CHASSIS DATA	
D	22FEB21	COL	COL		
C	01FEB21	COL	MMF	MAKE	
B	16NOV20	MMF	COL	PIERCE	
A	22OCT20	MMF	COL	MODEL	
				ENFORCER	

Pierce MANUFACTURING INC.

TITLE	Pierce Pumper Approval Drawing -	JOB NO.	35529
		SCALE 1:24	DATE
FOR	City of Gallatin -	DRAWN BY MMF	14SEP20
		CHECKED BY COL	14SEP20
DWG NO.	35529AD	SHEET SIZE D	SHEET NO. 1 OF 1

View File Created 24-FEB-2021 11:38:27