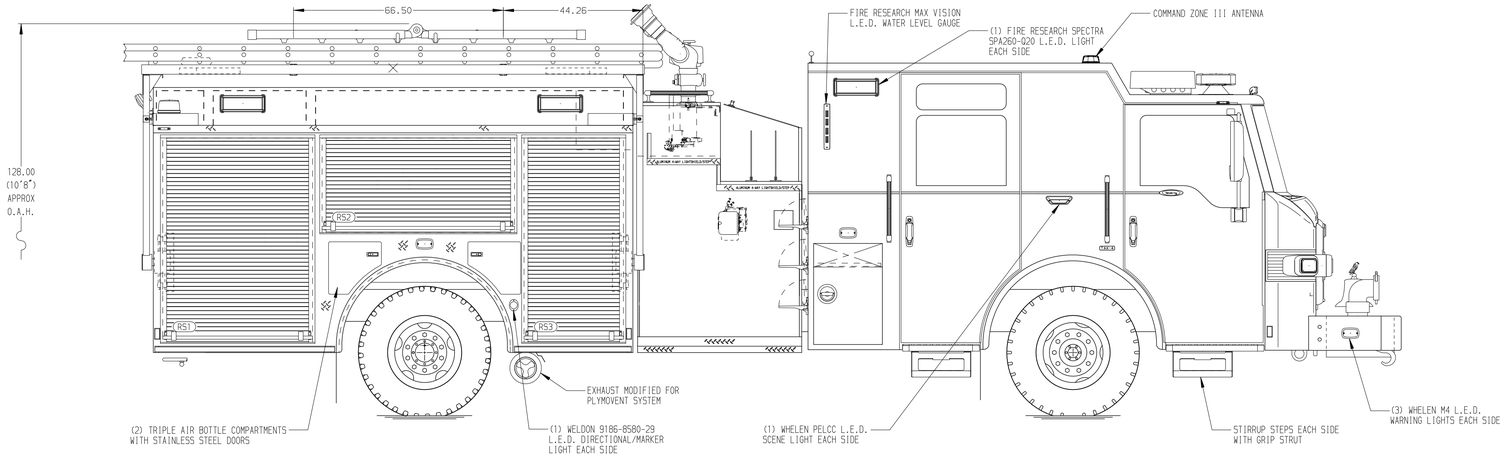

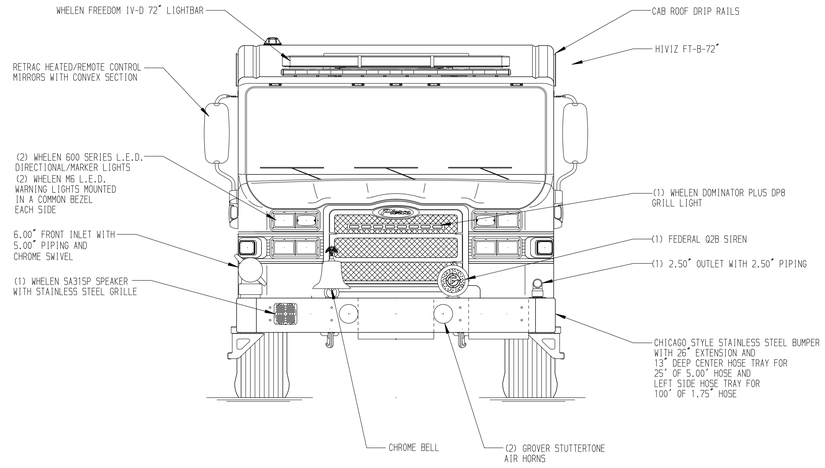

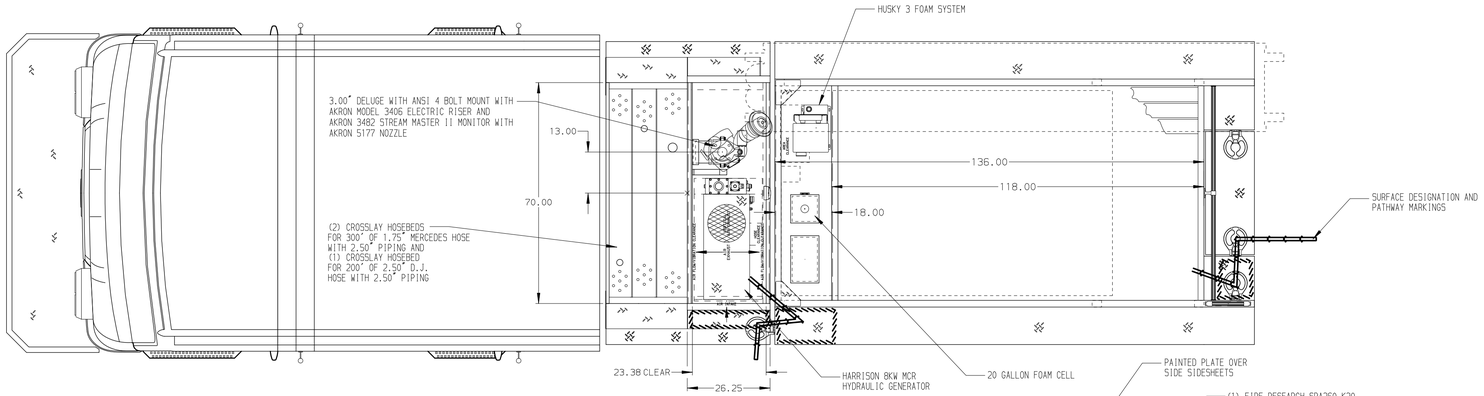

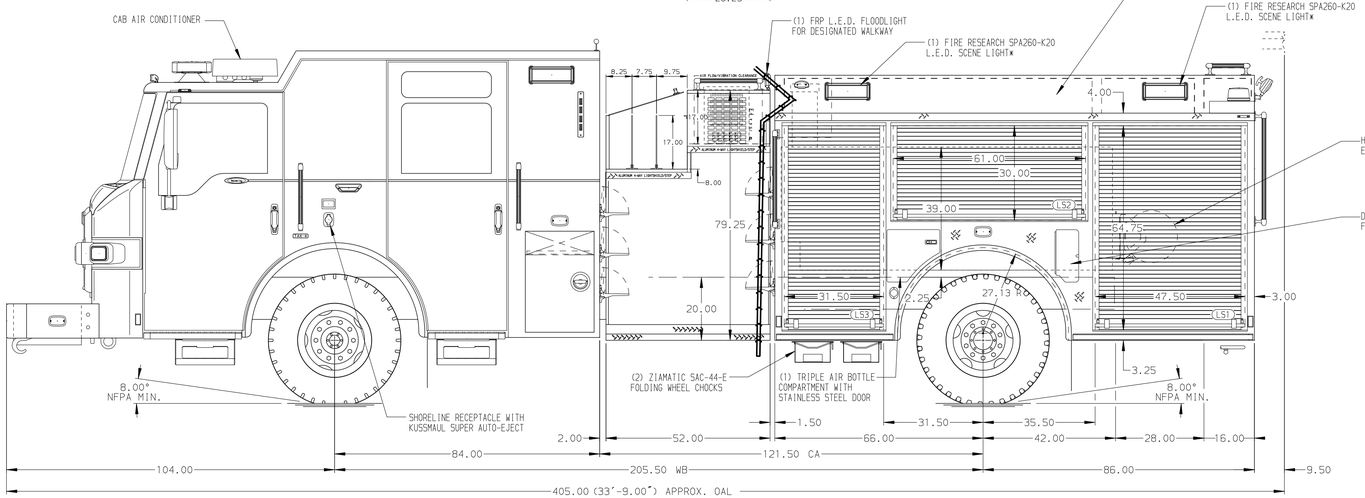

HOSEBED CAPACITIES

1. 1100' OF 5.00" MERCEDES HOSE
2. 1100' OF 5.00" MERCEDES HOSE
3. 400' OF 2.50" MERCEDES HOSE

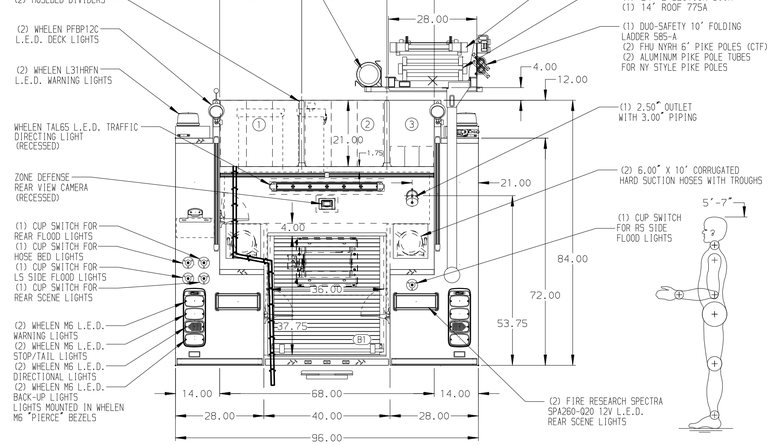

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGER INDICATOR BEHIND CAB DOOR ON DRIVER'S SIDE
3. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED LS1, LS2, LS3, RS1, RS2, RS3, AND B1
4. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT LS1, LS3, RS1, RS3, AND B1
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT LS1, LS3, RS1, RS3, AND B1
6. PAC TRAC WILL BE INSTALLED ON ALL BACK WALLS OF THE SIDE BODY COMPARTMENTS
7. TURTLE TILE MATTING W/RAMP ON FLOORS IN COMPARTMENTS LS2 AND RS2
8. TURTLE TILE MATTING ON ALL SHELVES AND FLOOR TRAYS IN COMPARTMENTS LS1, LS3, RS1, RS3, AND B1
9. NORCOLD NR751BB REFRIGERATOR WITH ADJACENT A/C AND D/C OUTLET LOCATED IN COMPARTMENT LS1 ON SLIDE OUT TRAY
10. CIRCUIT BREAKER PANEL IN COMPARTMENT LS3
11. 120V 6-PLACE RECEPTACLE STRIP LOCATED IN THE CAB BEHIND THE DRIVER'S SEAT
12. 120V DUPLEX RECEPTACLE LOCATED IN COMPARTMENTS LS2 AND RS3

REV	DATE	BY	CH
1	22JAN21	SAM	DTS
2	25NOV20	SAM	DTS
3	13OCT20	CDU	KOU

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

Pierce MANUFACTURING INC.

TITLE: 2000-D-750P,730 GAL. WATER/20 GAL. FOAM CELL
152" PUMPER BODY,HYDRAULIC LADDER RACK,DELUGE

FOR: BOROUGH OF POINT PLEASANT BEACH
POINT PLEASANT BEACH, NEW JERSEY

DWG NO. 35565AD

JOB NO.	35565
SCALE	DATE
1:24	
DRAWN BY	
SAM	06OCT20
CHECKED BY	
CDU	7OCT20
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 25-JAN-2021 07:18:56