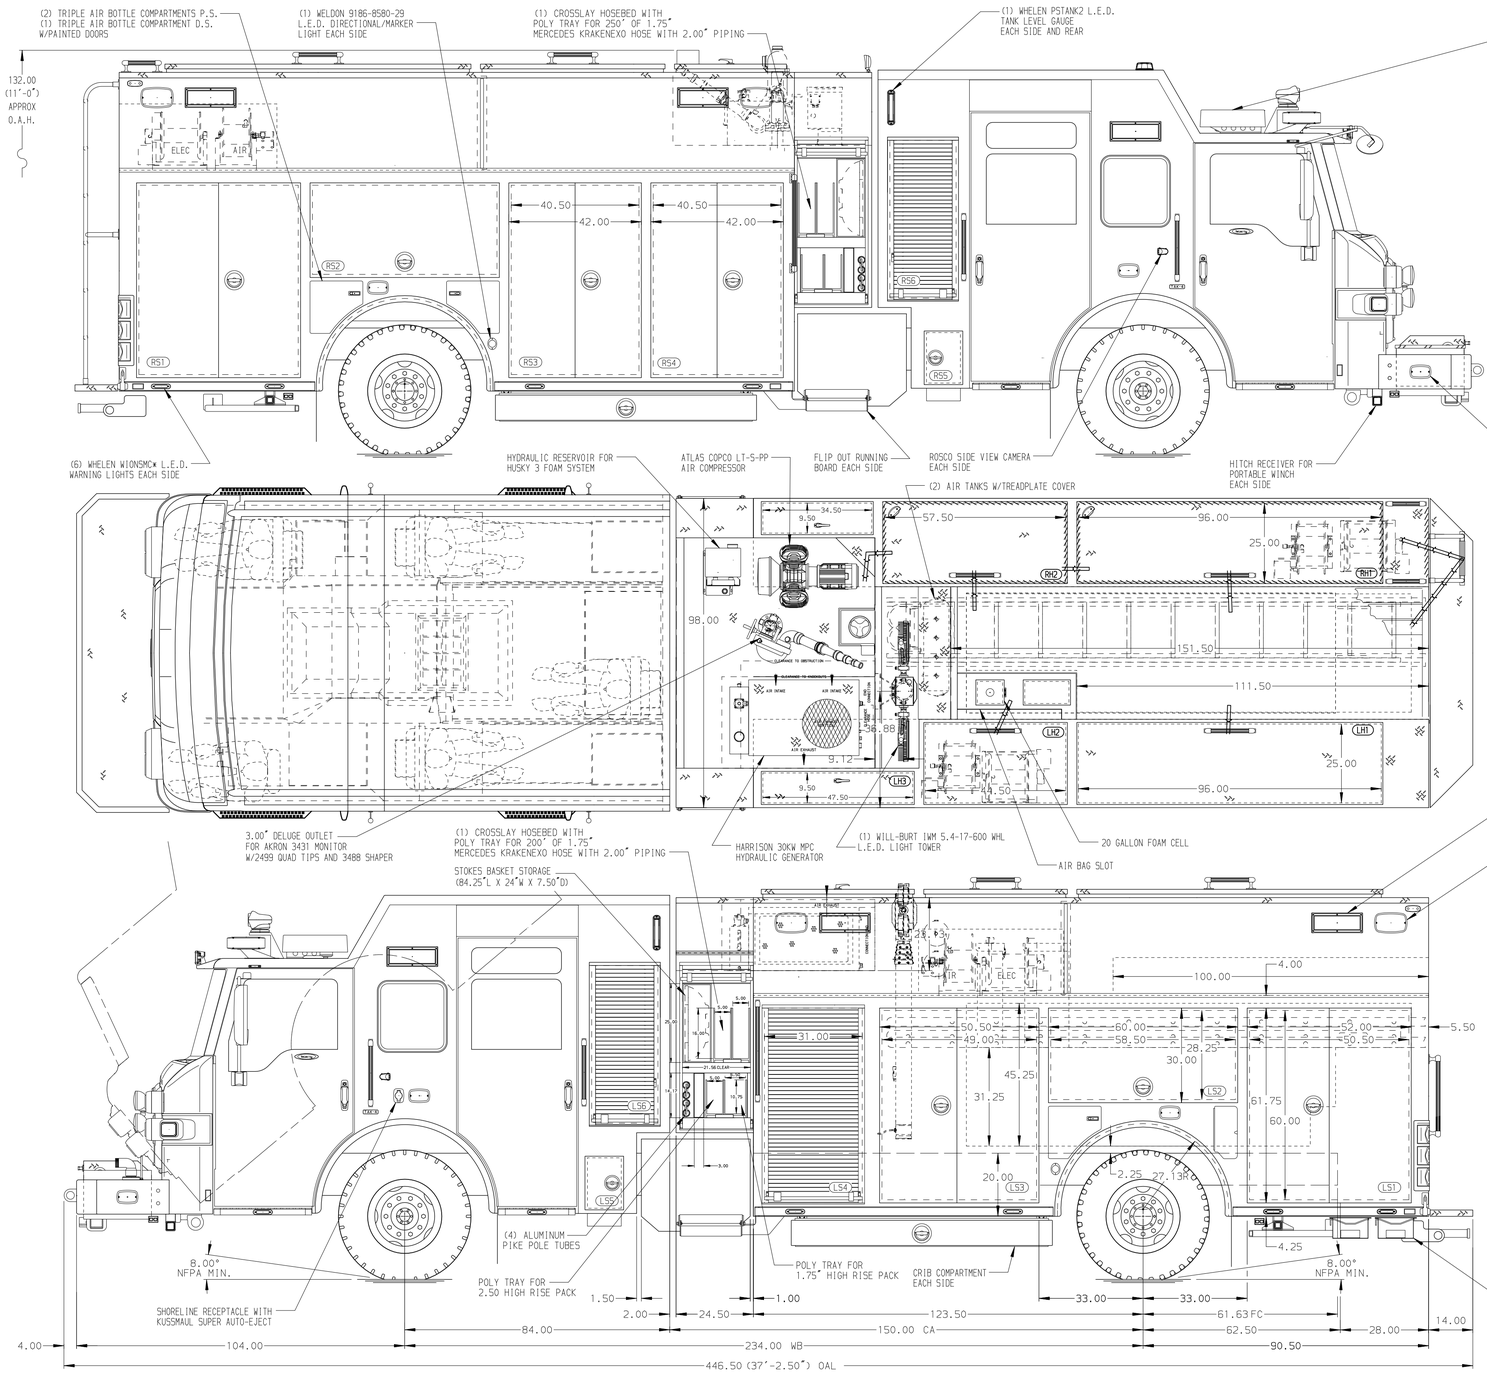

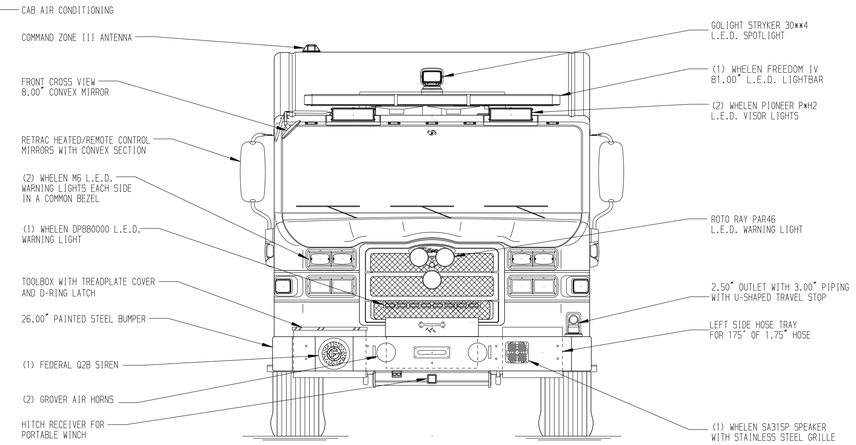

HOSEBED CAPACITIES

1. 350' OF 3.00" HOSE
2. 1200' OF 4.00" HOSE
3. 400' OF 1.75" HOSE
4. 250' OF 2.50" HOSE

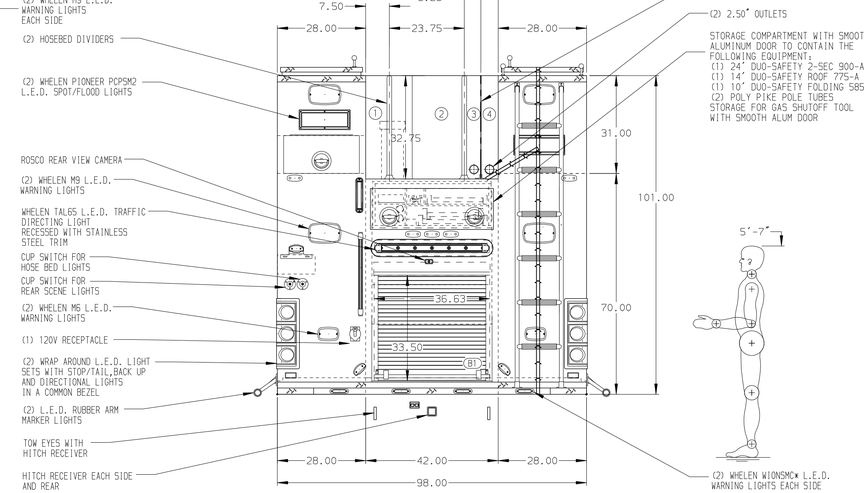

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
3. ONSPOT AUTOMATICE TIRE CHAINS

REV	DATE	BY	CH
V	26FEB20	JWO	CSH
V	29JAN20	JWO	CSH
V	27JAN20	JWO	CSH
V	25NOV19	JWO	DTS

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

Pierce MANUFACTURING INC.

TITLE: 1500-D-500 WATER W/20G FOAM CELL, 214" RESCUE PUC
(2)CROSSLAYS, DELUGE, HUSKY 12, GENERATOR, REELS

FOR: FAIRFAX VOLUNTEER FIRE DEPARTMENT
FAIRFAX, VIRGINIA

DWG NO. 34225AD-SH1

JOB NO.	34225
SCALE	DATE
1:24	
DRAWN BY	DATE
JWO	22AUG19
CHECKED BY	DATE
CDU	29AUG19
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 27-FEB-2020 12:18:10