
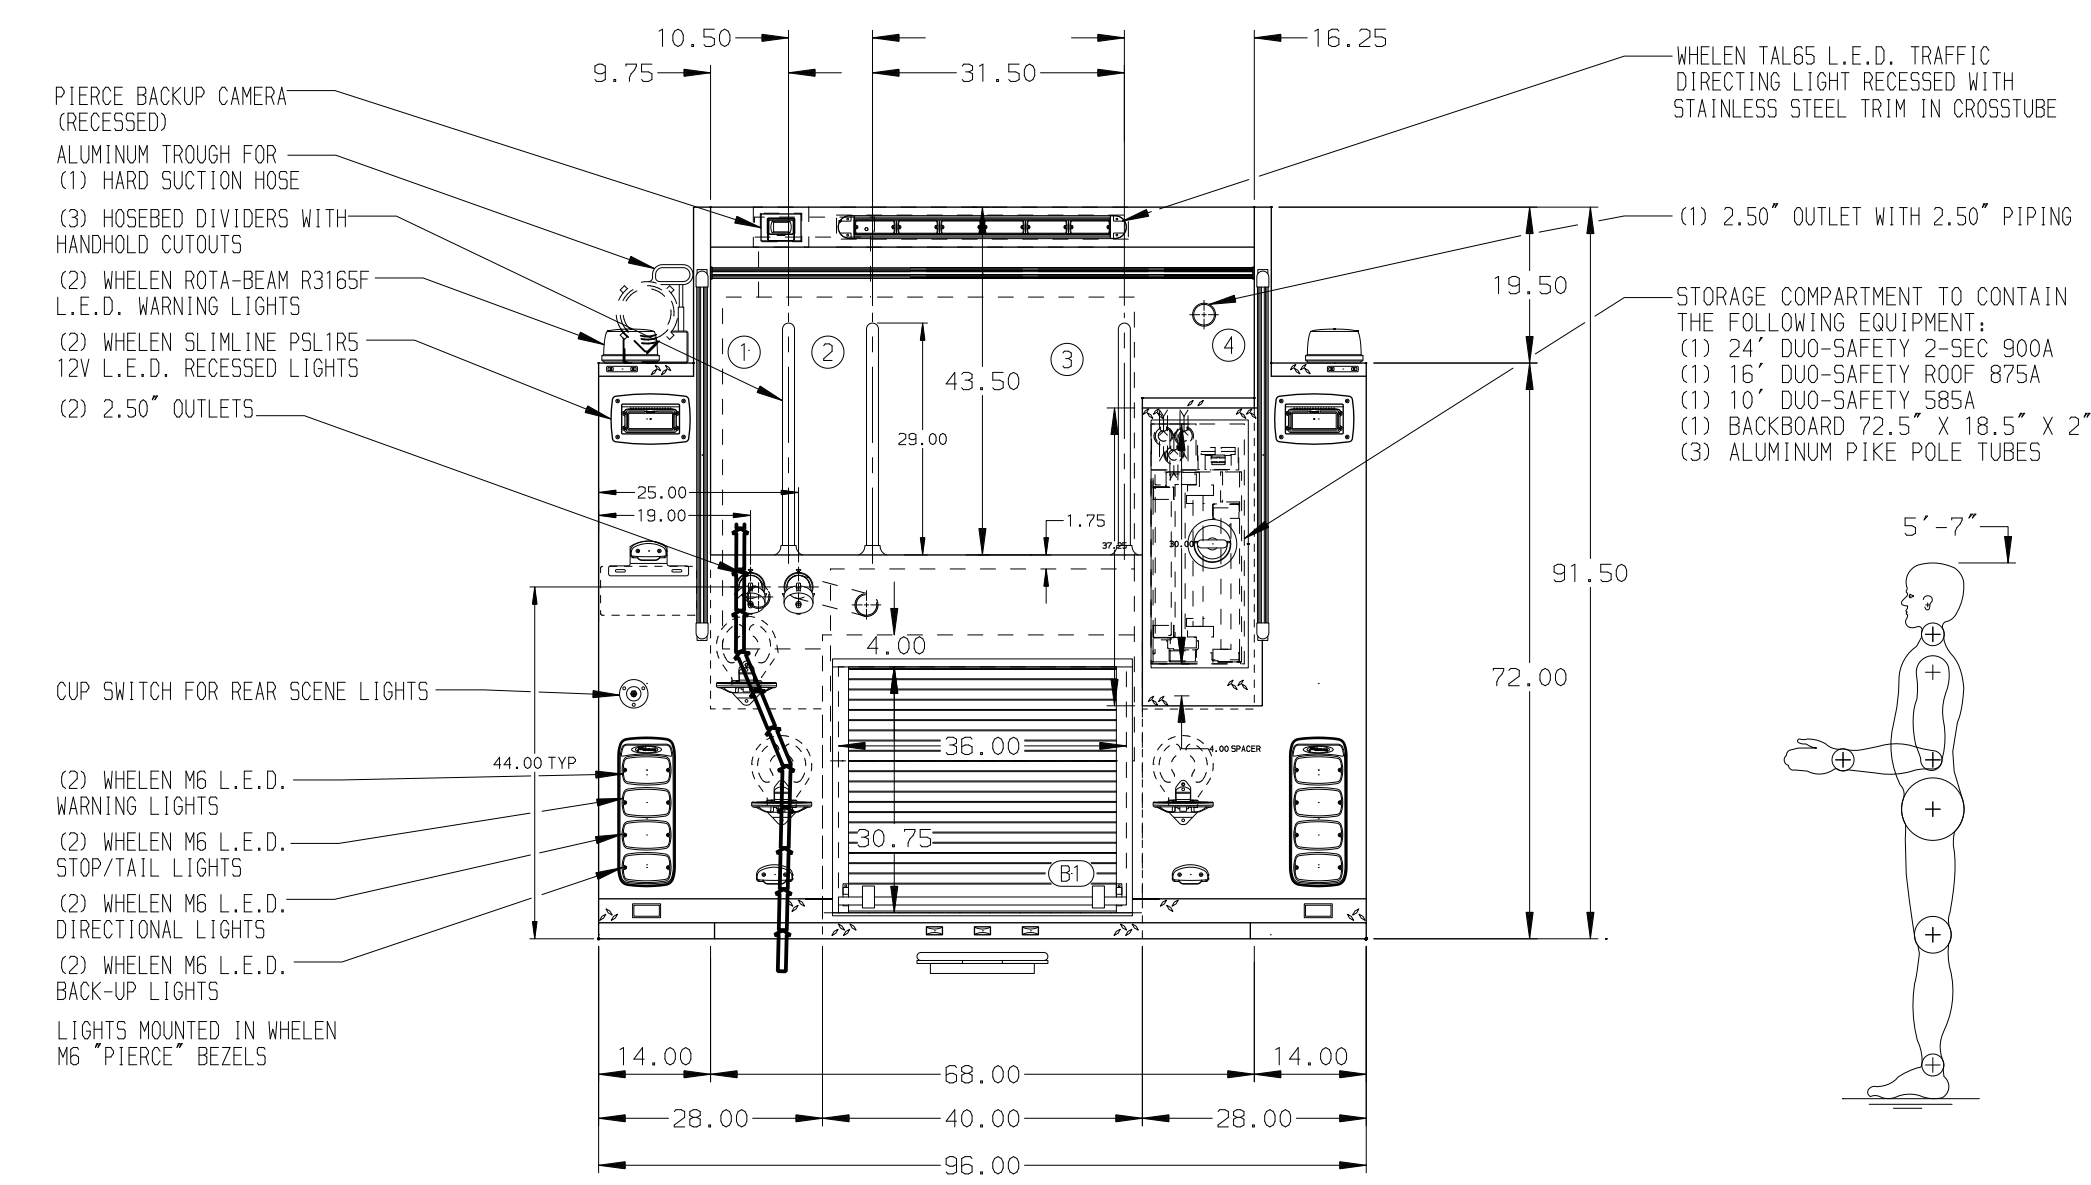


HOSEBRED CAPACITIES

①	600' OF 2.50" D.J. HOSE
②	600' OF 2.50" D.J. HOSE
③	1000' OF 5.00" D.J. HOSE
④	OPEN

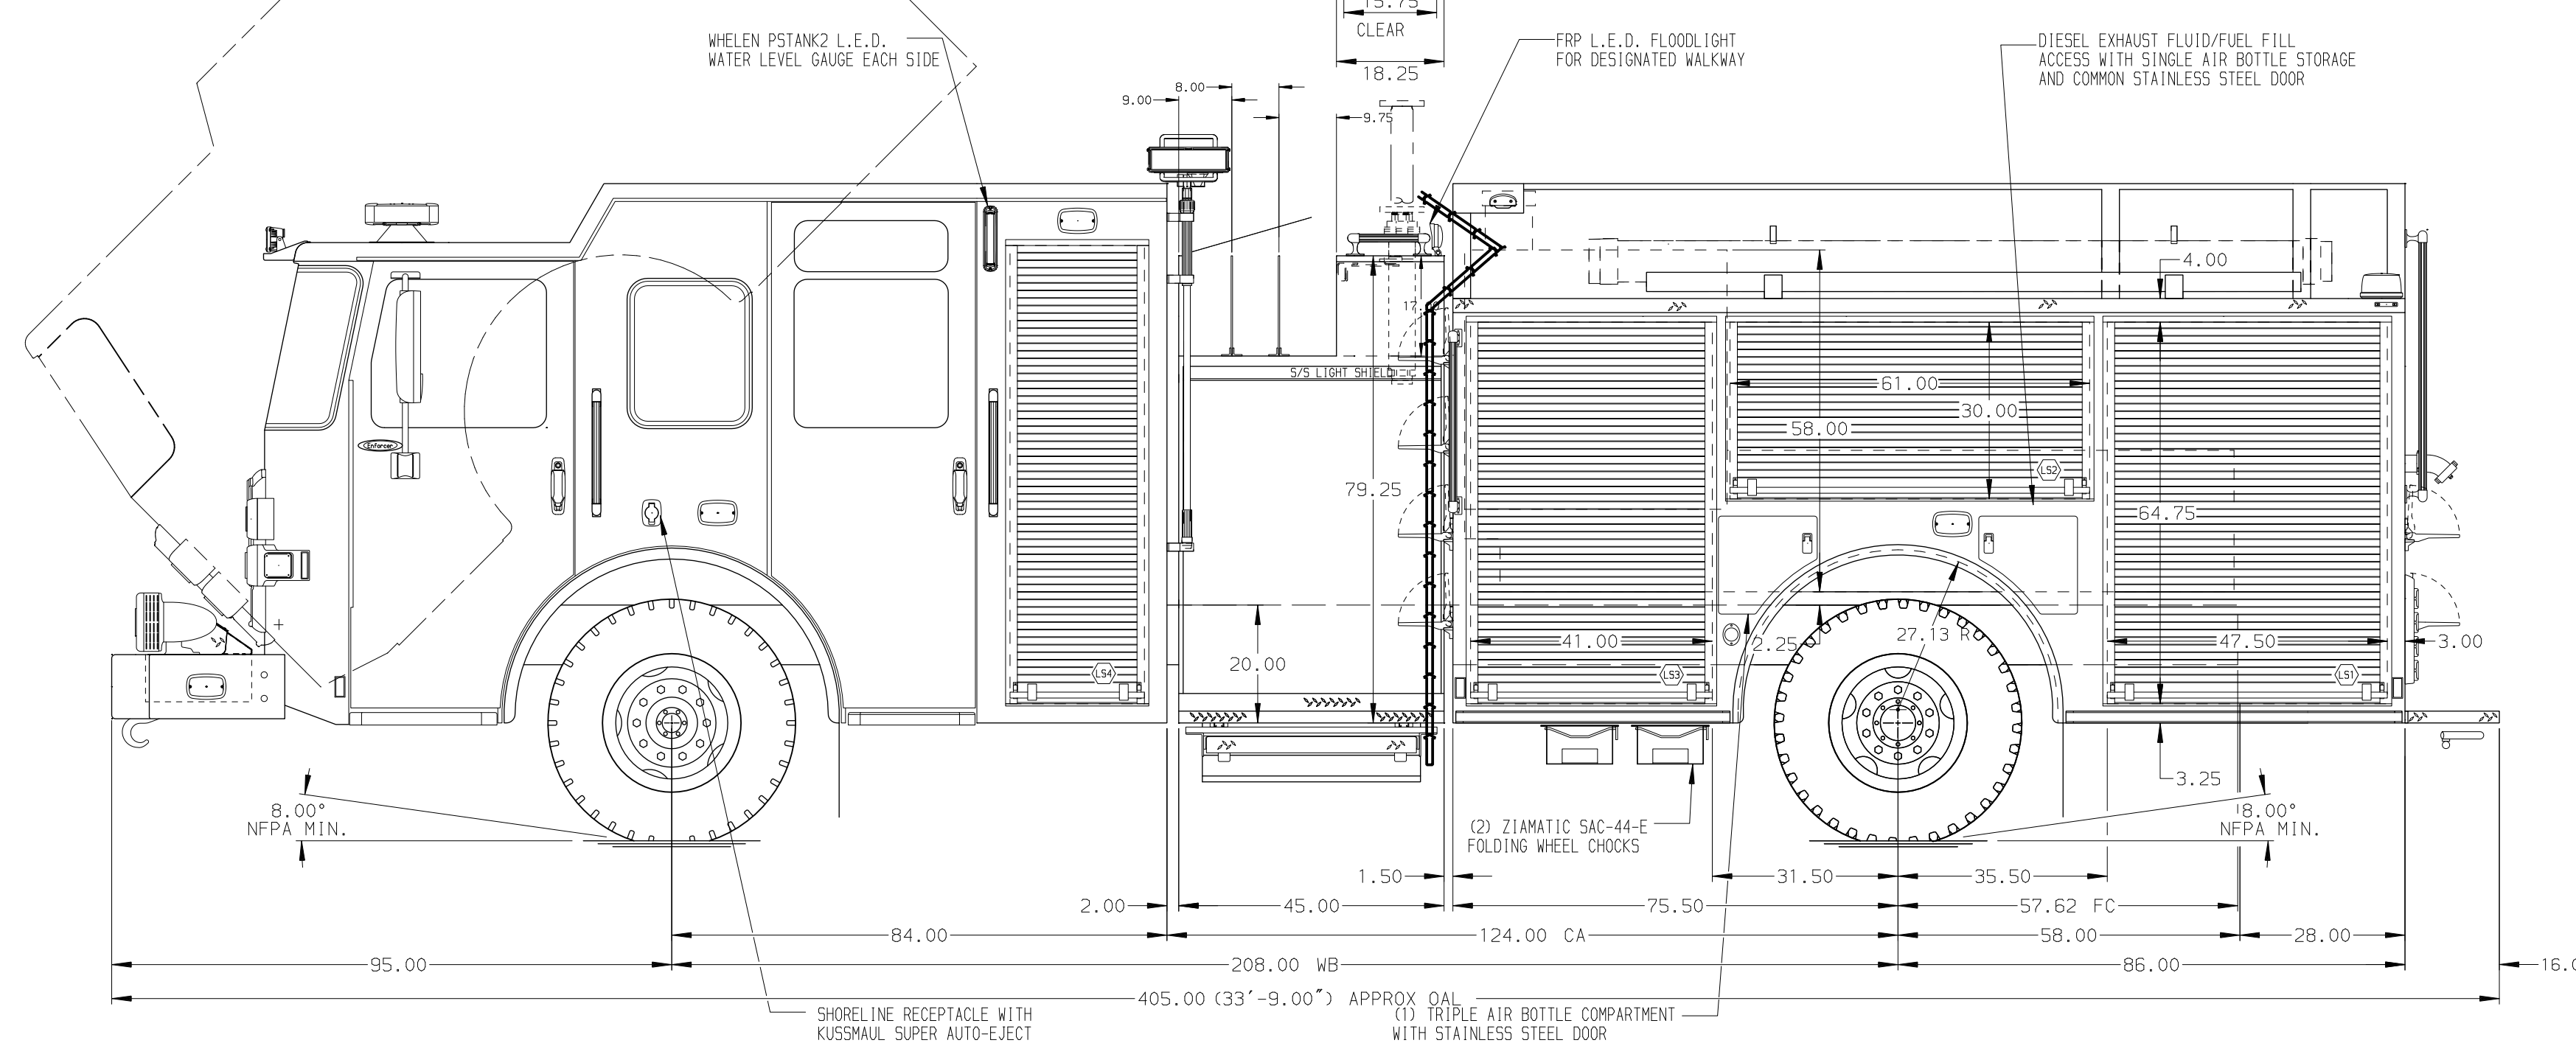

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED IN DS LOWER STEP WELL OF CAB
- BATTERY CHARGER LOCATED IN COMPARTMENT L53
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED IN EACH COMPARTMENT
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS L51, L52, L53, R51, R52, AND R53
- ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2.00" SIDES IN COMPARTMENTS L51, R51, AND B1
- ALUMINUM PEGBOARD ON THE BACK WALL OF COMPARTMENTS L53, R52, AND R53

REV	DATE	BY	CH	ENFORCER
24FEB20		KLE	CW1	PIERCE
30JAN20		KLE	CW1	MODEL

TITLE	FOR	DWG NO.
1500-D-750P 161" PUMPER BODY, (3) CROSSLAY LADDERS BETWEEN TANK AND BODY, DELUGE	WARRENVILLE FIRE PROTECTION DISTRICT WARRENVILLE, ILLINOIS	34441AD

JOB NO.	34441
SCALE	1:24
DATE	
DRAWN BY	KLE
CHECKED BY	NPE
SHEET SIZE	D
SHEET NO.	1 OF 1