


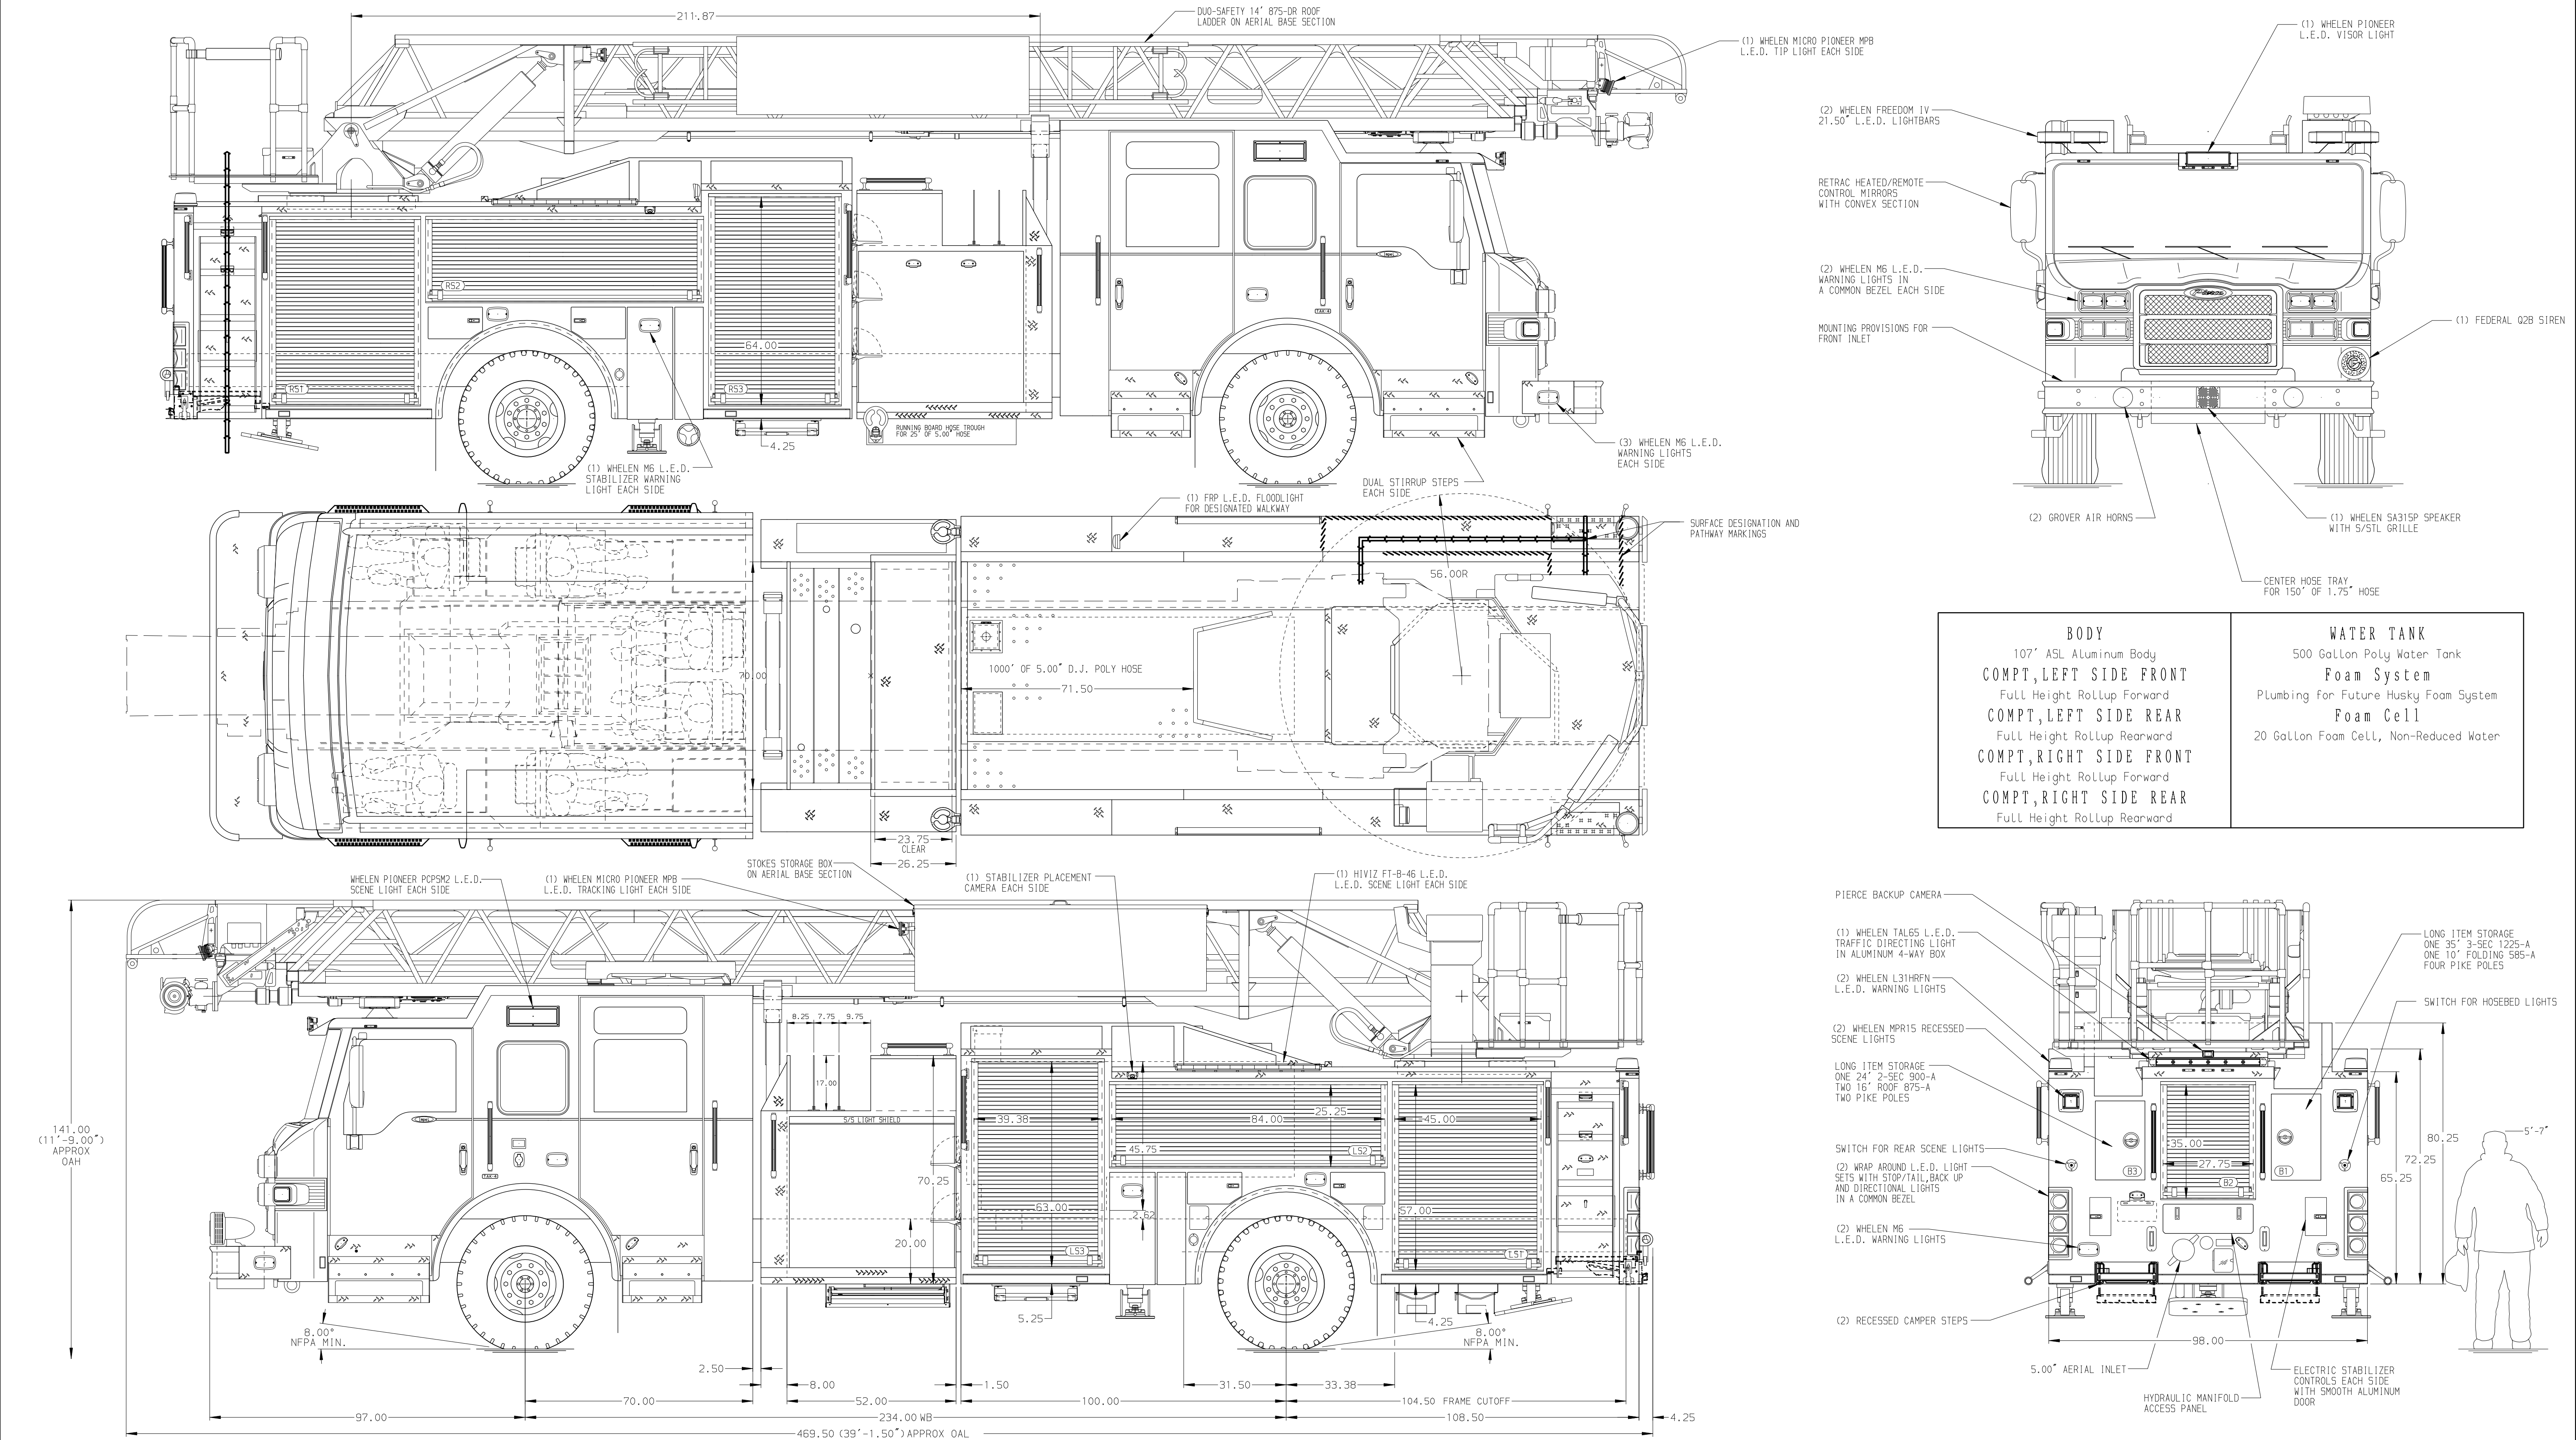

BODY 107' ASL Aluminum Body COMPT,LEFT SIDE FRONT Full Height Rollup Forward COMPT,LEFT SIDE REAR Full Height Rollup Rearward COMPT,RIGHT SIDE FRONT Full Height Rollup Forward COMPT,RIGHT SIDE REAR Full Height Rollup Rearward	WATER TANK 500 Gallon Poly Water Tank Foam System Plumbing for Future Husky Foam System Foam Cell 20 Gallon Foam Cell, Non-Reduced Water
---	--

CHASSIS Impel Chassis ENGINE 450 HP Cummins L9 Engine		CAB 7010 Notched Impel FR Cab BUMPER 19" Extended Stainless Steel		AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle AXLE, REAR 33,500 Lb Meritor Axle		TRANSMISSION Allison 5th Gen, 3000 EVS P		PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU		CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity		SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required		SAFETY Side Roll and Frontal Impact Protection		CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____		 MANUFACTURING INC.		JOB NO. 34522	
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.		1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB 3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPMILL 4. BATTERY CHARGER LOCATED IN CROW CAB SEAT RISER 5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB 6. SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER 7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER 8. NON-RAISED AERIAL PEDESTAL 9. 1500 GPM HIGH FLOW WATERWAY 10. NO LIMITED RETRACTION										SCALE 1:24		DATE							
												TITLE		DRAWN BY		14NOV19					
												FOR		CHECKED BY		14NOV19					
												DWG NO.		SHEET SIZE		SHEET NO.					
												REV		DATE		BY		CH		IMPEL	