



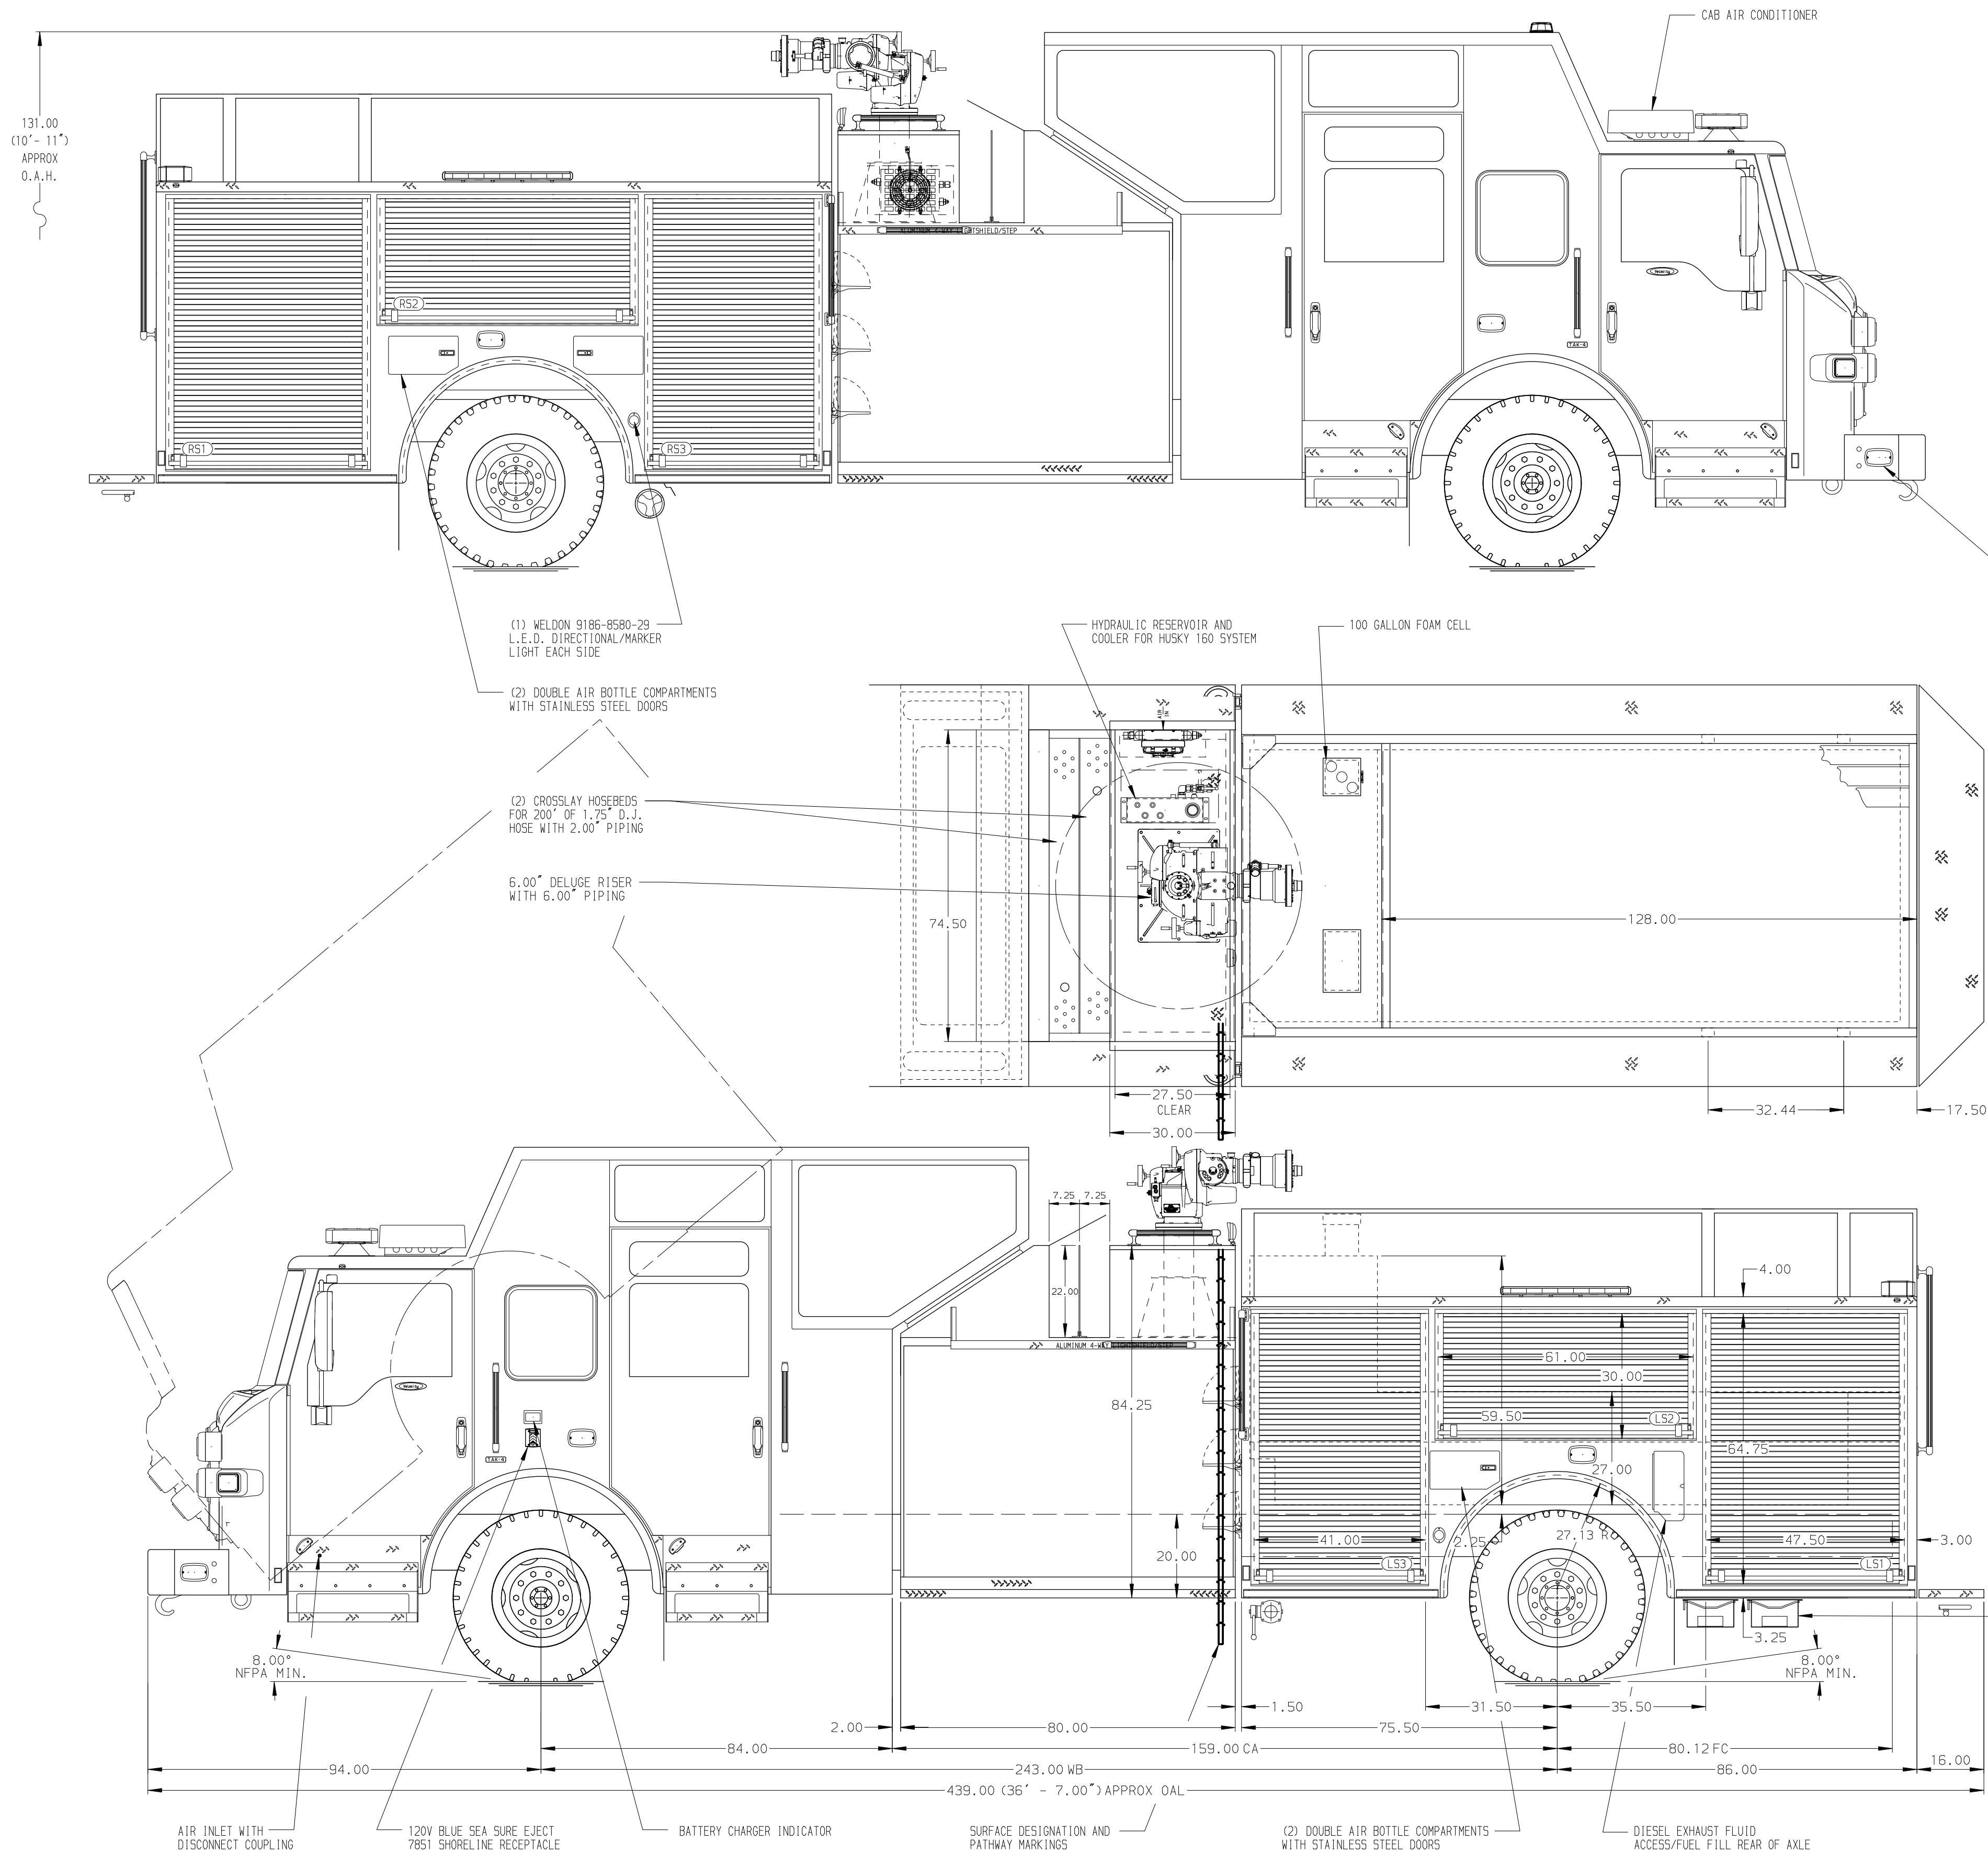

HOSEBED CAPACITIES

① - 500' OF 3.00" HOSE

② - 1500' OF 5.00" HOSE

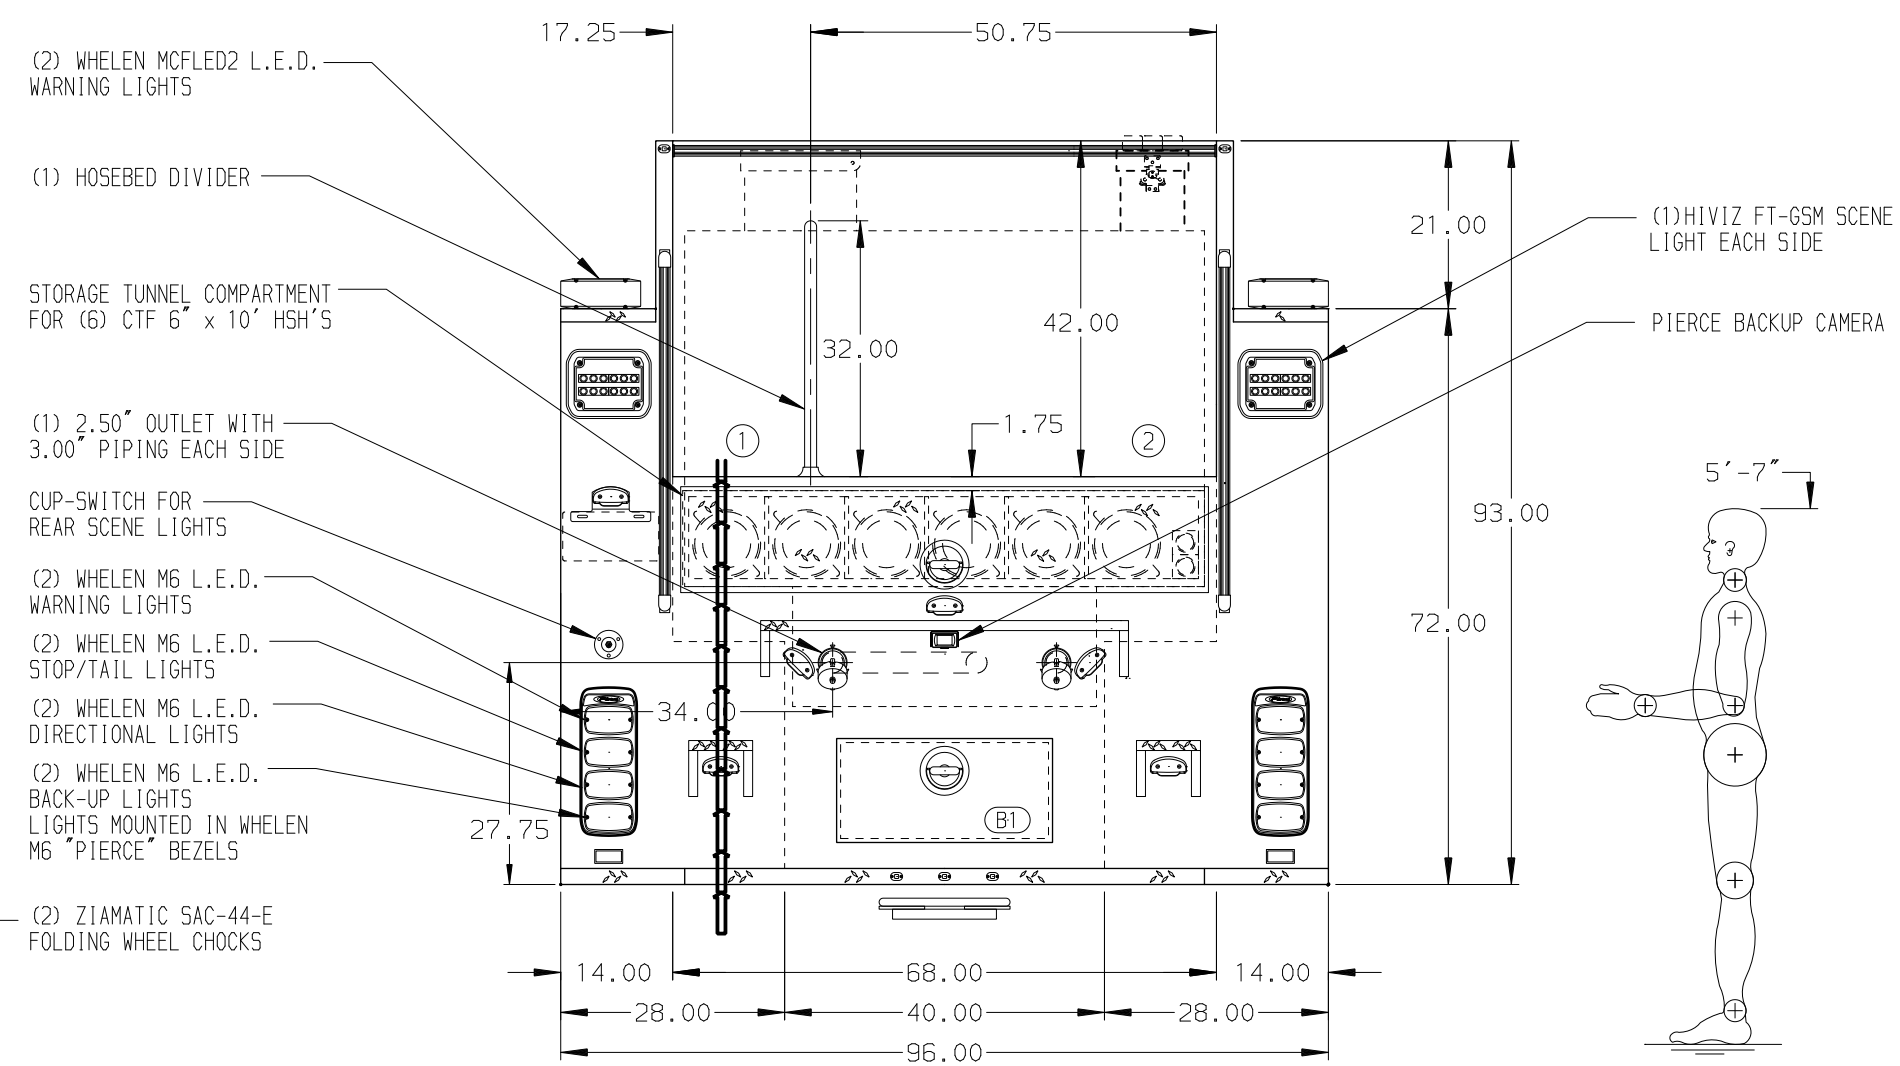

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ON COMPARTMENT L51, L52, L53, R51, R52 & R53
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT L51, L53, R51 & R53
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT L51 & R51

REV	DATE	BY	CH	VELOCITY
1	31MAR20	AMI	LPA	CHASSIS DATA
2	12FEB20	AMI	LPA	MAKE
3	29JAN20	AMI	LPA	PIERCE
4	20NOV19	AMI	KOU	MODEL

Pierce MANUFACTURING INC.		JOB NO.	34552
		SCALE	1:24
		DATE	
TITLE		DRAWN BY	AMI
FOR		CHECKED BY	KOU
DWG NO.		SHEET SIZE	D
		SHEET NO.	1 OF 1

3000-D-600P, 500 WATER, 100 FOAM, 161" INDUSTRIAL (2) XLAYS, 6" DELUGE OUTLET, HUSKY 160 FOAM SYSTEM

TEXAS A&M UNIVERSITY (TEEX) COLLEGE STATION, TEXAS

34552AD