

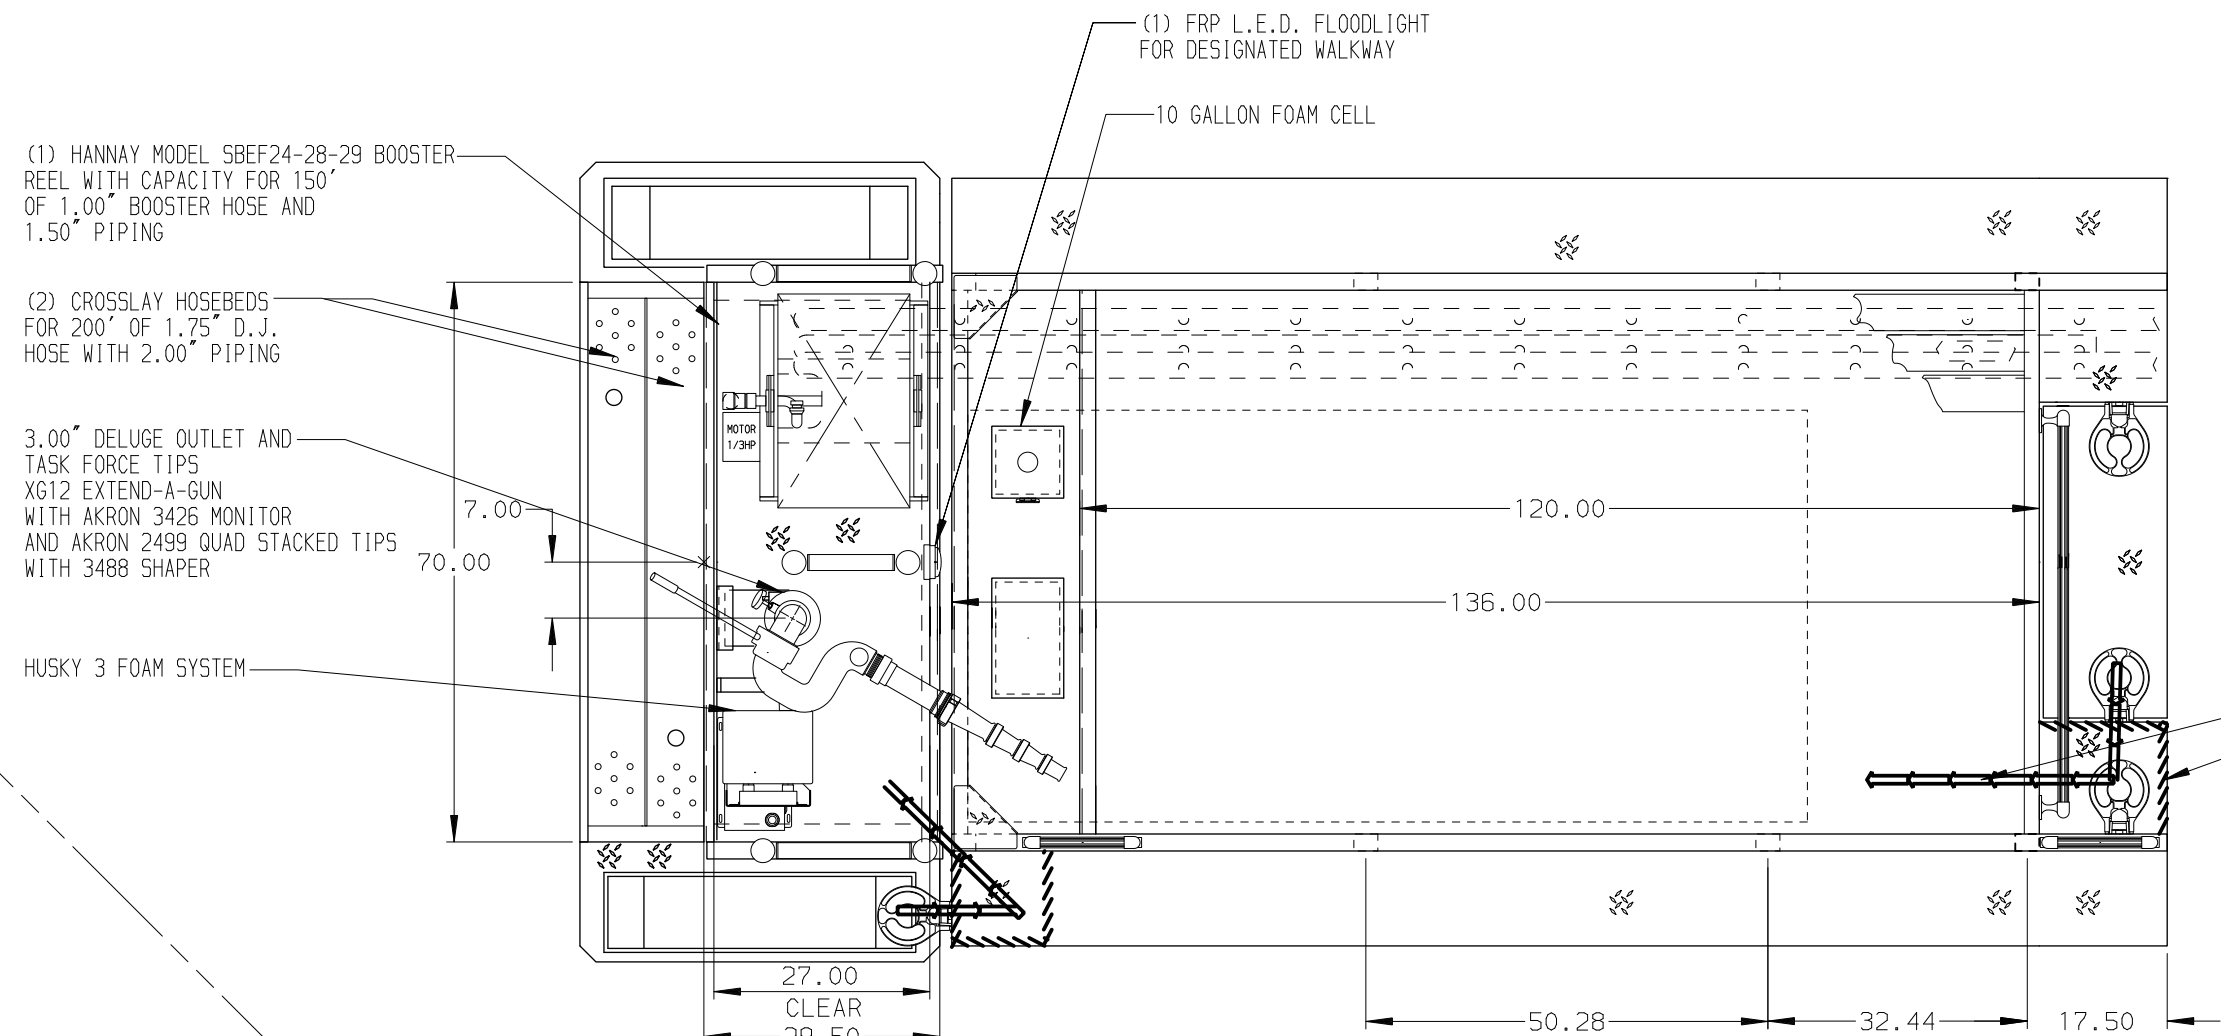
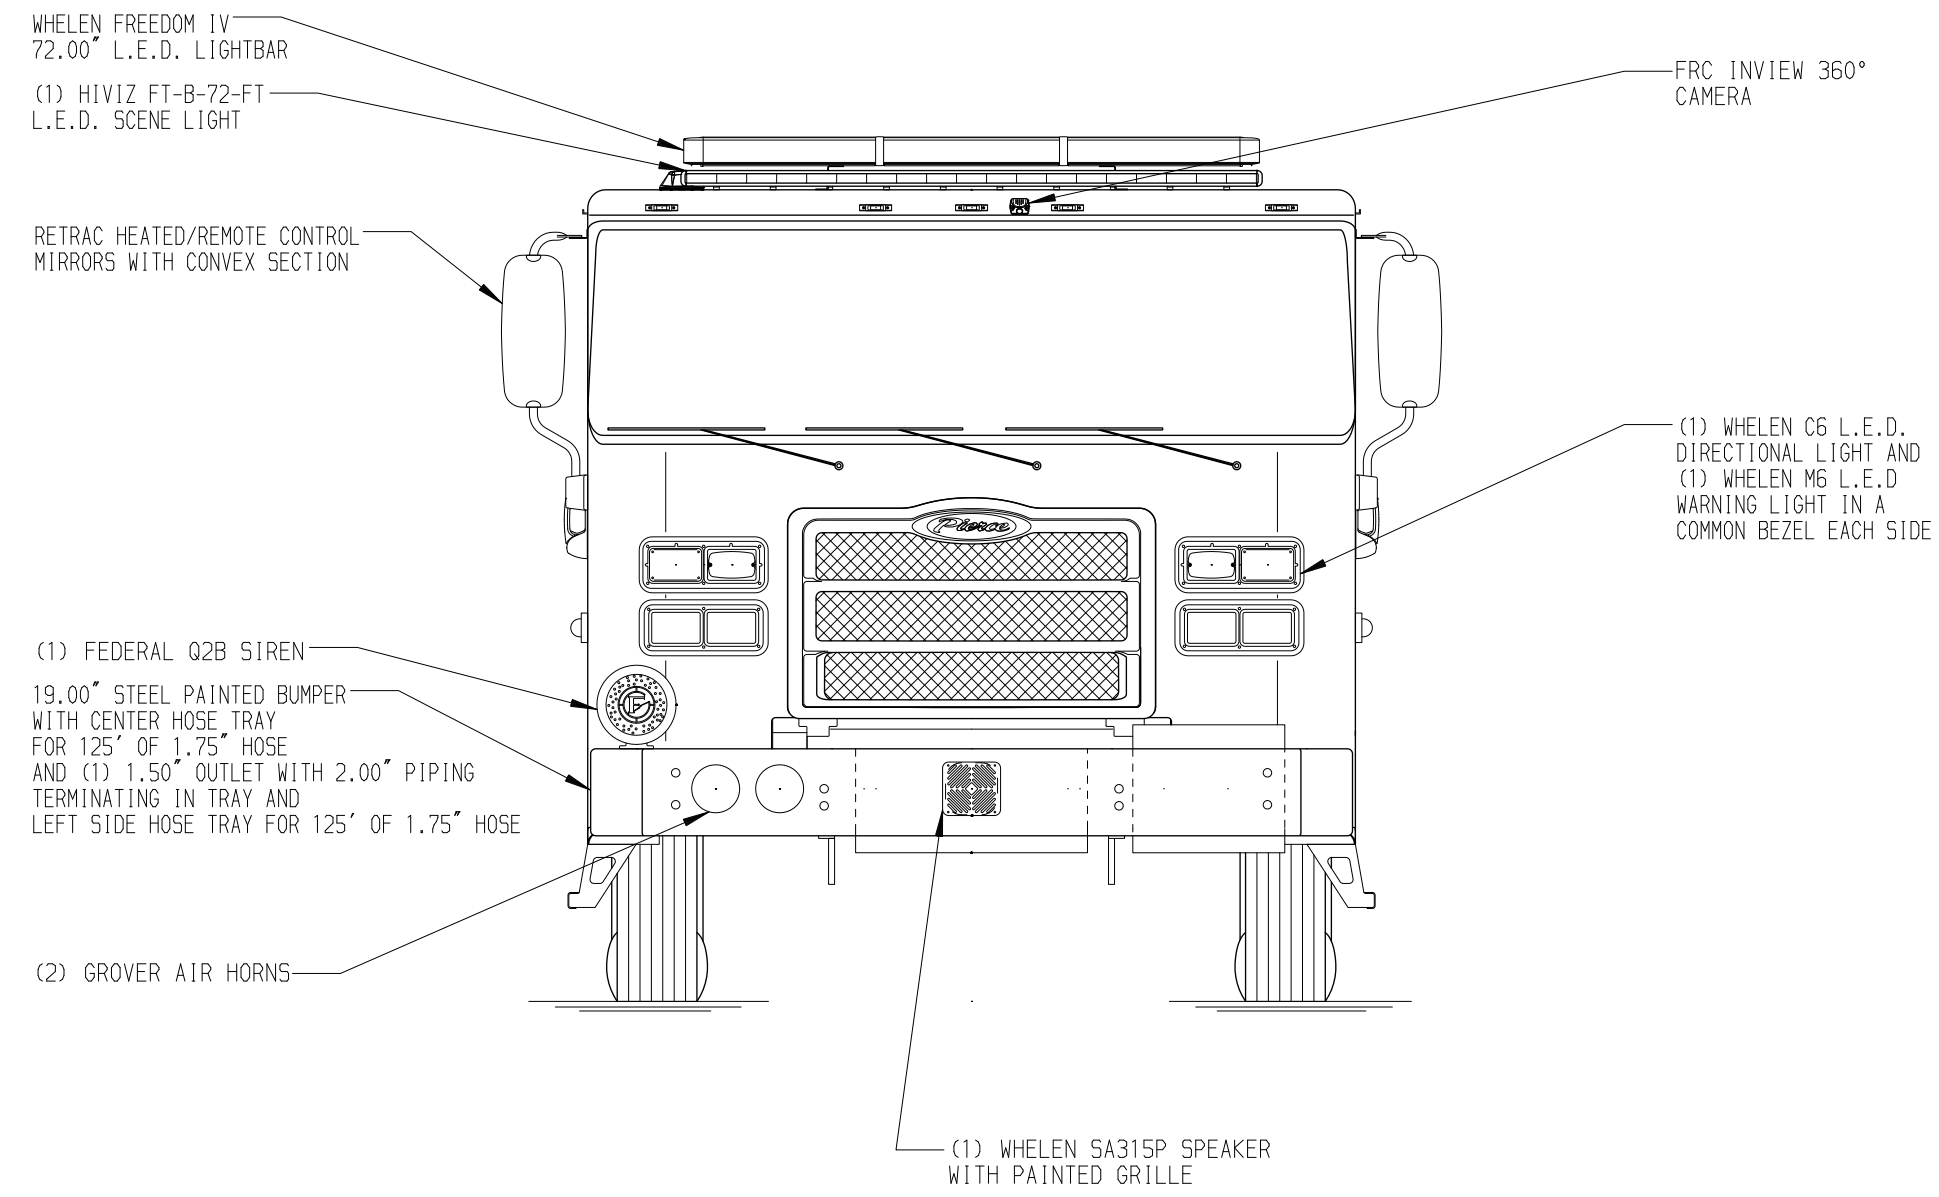
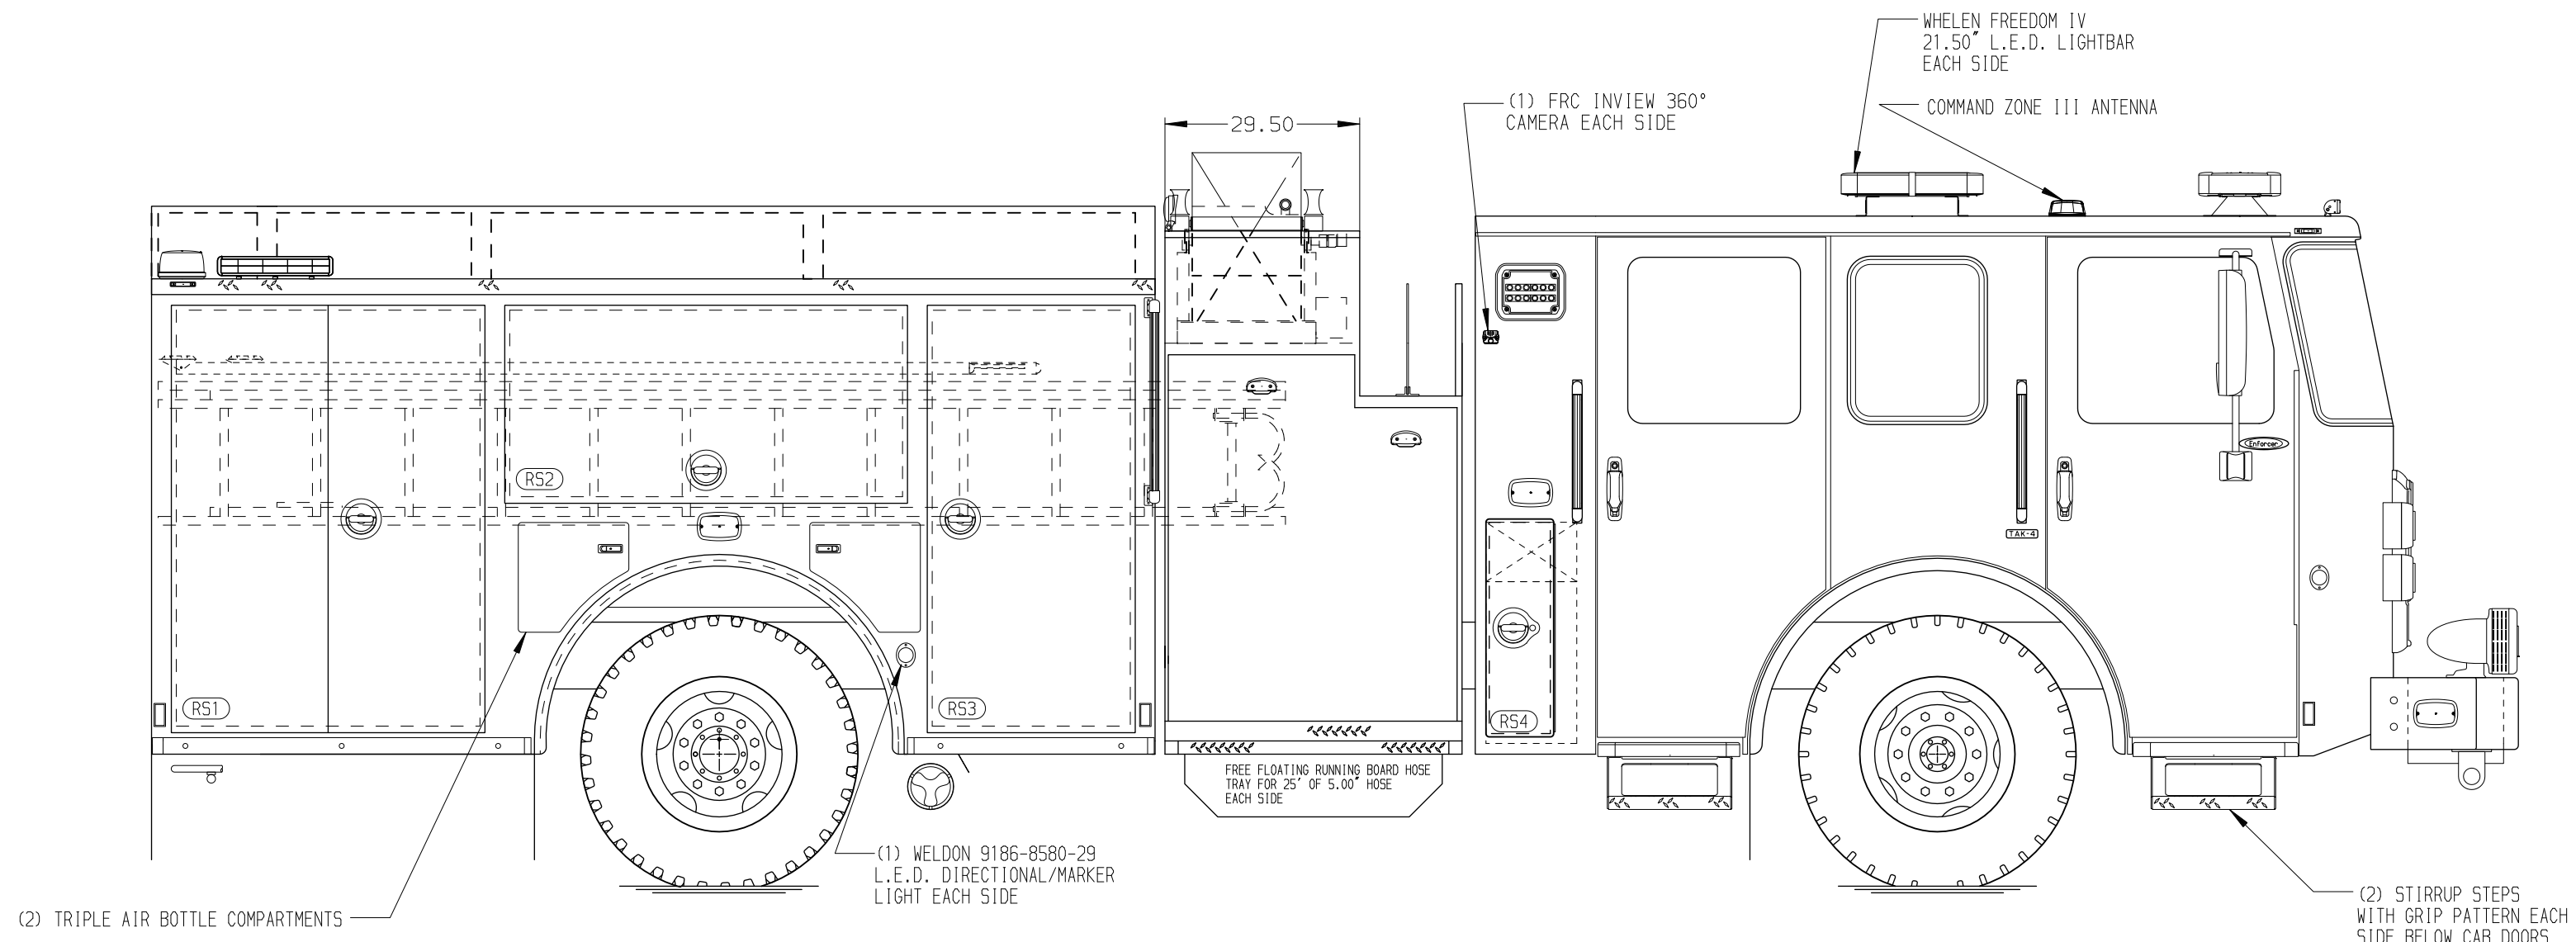


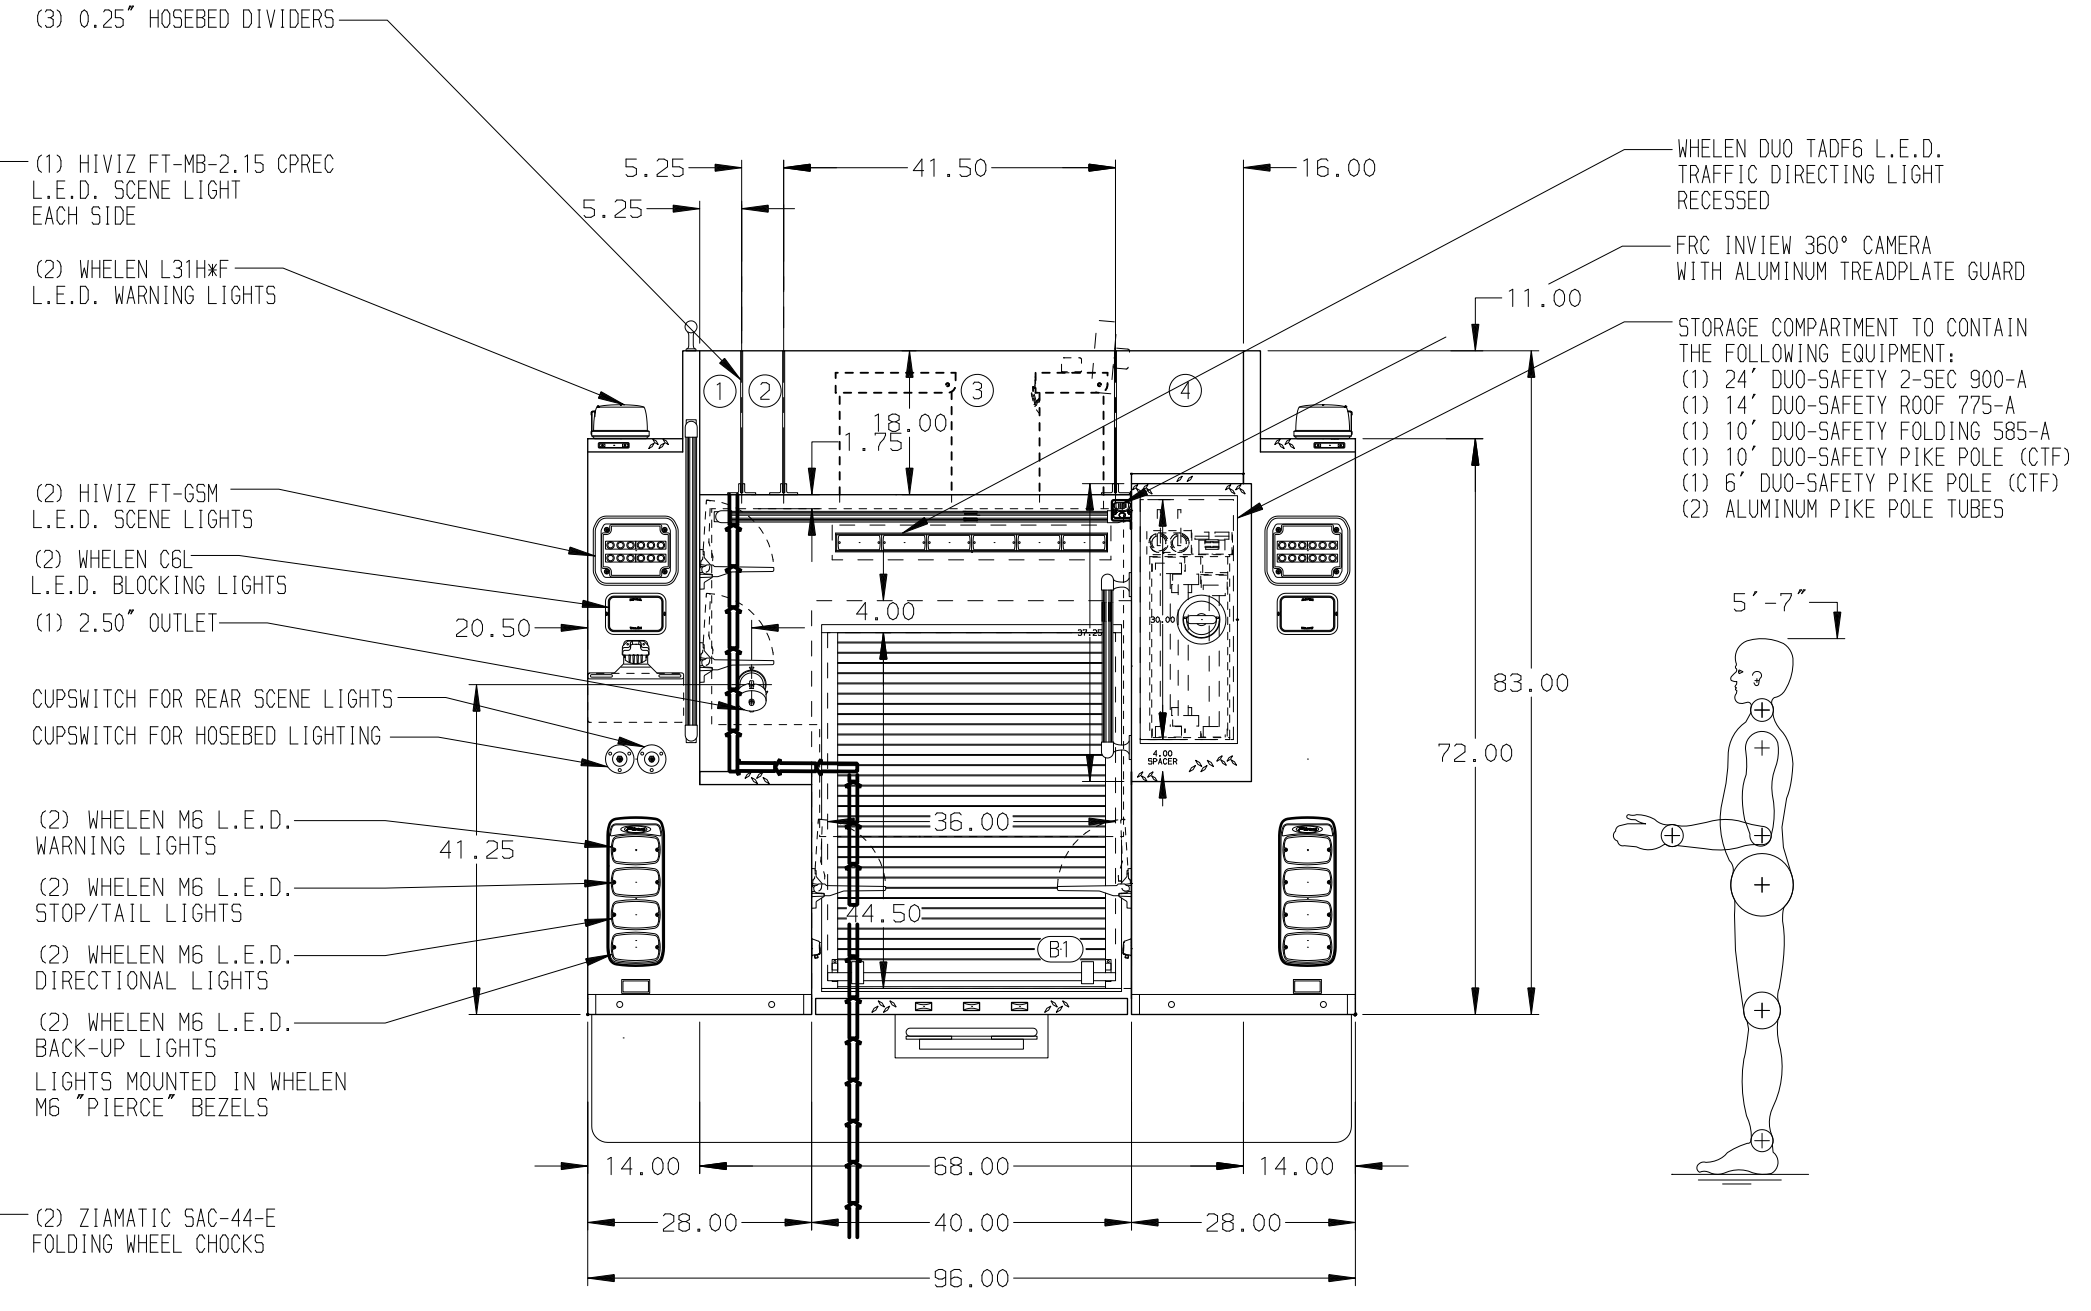

- HOSEBED CAPACITIES
- ① 200' OF 2.50" HOSE
 - ② 200' OF 2.50" HOSE
 - ③ 1200' OF 4.00" HOSE
 - ④ 500' OF 2.50" HOSE

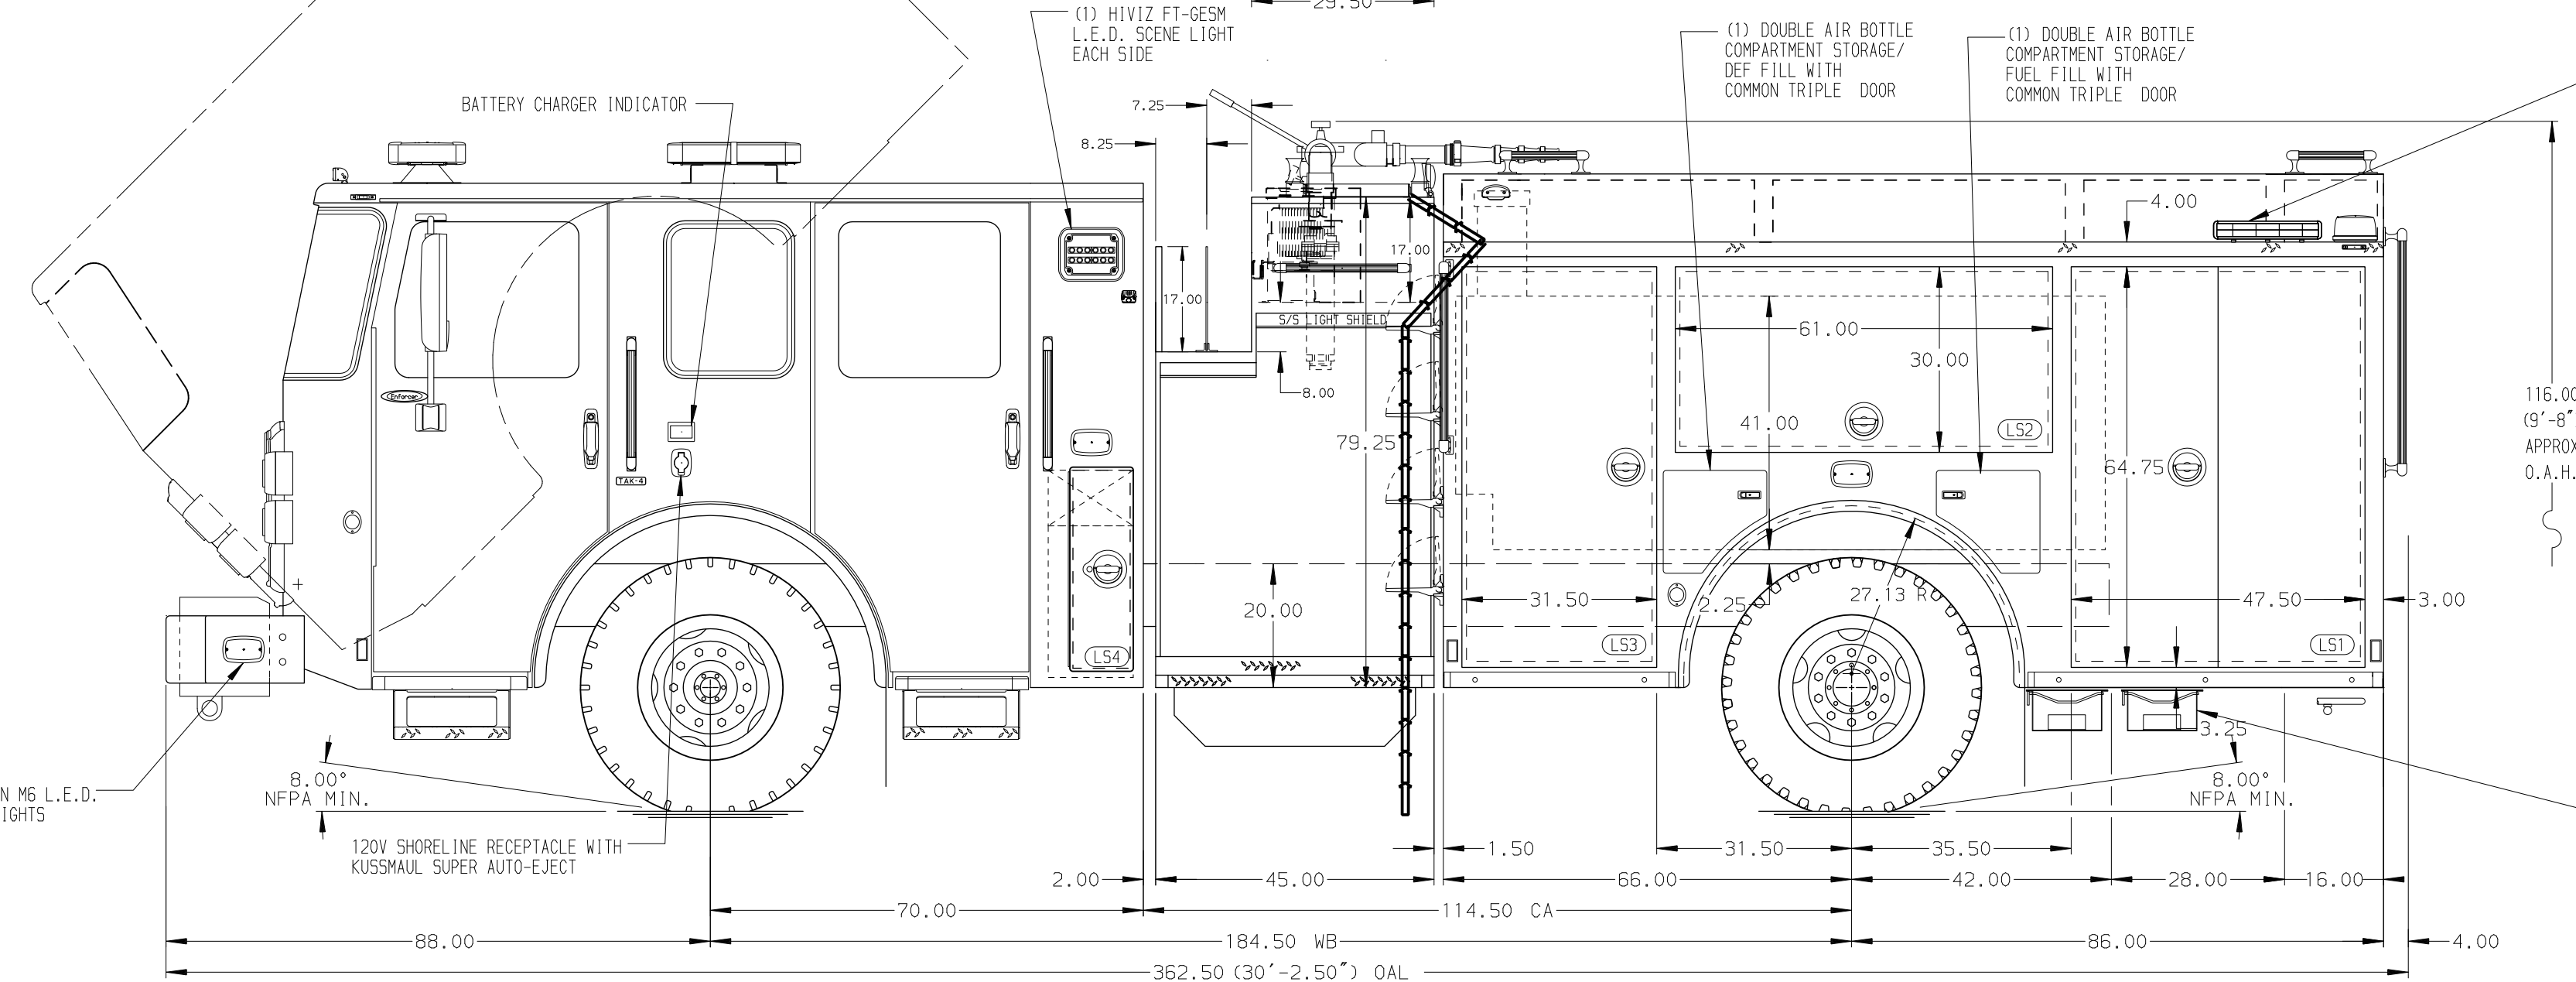

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. AIR INLET WITH DISCONNECT COUPLING ON D.S. STEP WELL
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- 3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 4. TWO FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN LS1, LS3, RS1, AND RS3
- 5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN LS1, LS3, RS1, AND RS3
- 6. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN LS2

▽	10SEP20	LST	CSH	CHASSIS DATA
▽	24AUG20	LST	CSH	MAKE
▽	10AUG20	LST	CSH	PIERCE
▽	21APR20	SHD	DT5	MODEL
▽	12MAR20	LST	DT5	ENFORCER
REV	DATE	BY	CH	

 MANUFACTURING INC.		JOB NO.	34779
		SCALE	1:24
		DATE	
TITLE		DRAWN BY	LST
FOR		CHECKED BY	CDU
DWG NO.		SHEET SIZE	D
		SHEET NO.	1 OF 1

1250-D-750P, 740 GAL OF WATER W/ 10 GAL FOAM CELL
152" FH FDLER,LDRS,BTWN TANK & S. SHEET, (2) X-LAYS
FLANDERS FIRE DISTRICT
FLANDERS, NEW YORK
34779AD