

Enforcer Chassis

27,000 Lb Dana Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS F

19" Extended Stainless Steel

7010 Enforcer Cab

30.75" FF Rollup Rear Comp

152" Rollup Full Height Front & Rear FDLER

152" Rollup Full Height Front & Rear FDLER

1500 GPM Dar-Ley PSM

1.50" Crosslay Not Required

2.50" Crosslay Not Required

(2) 1.50" Standard Capacity

Generator Not Required

Husky 3 Single Agent Foam System

20 Gallon Foam Cell, Reduced Water

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KISSMILK SUPER AUTO-EJECT LOCATED ON DRIVER SIDE REAR BULKHEAD
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING ON DRIVER SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. FOUR ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
9. ONE CTECH THREE DRAWER ASSEMBLY LOCATED PER SHOP ORDER

10. HANNAY BOOSTER REEL SBEF34-23-24 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE LOCATED IN COMPARTMENT B1

.75" D.J. POLY HOSE

BED 2


1.50" D.J. POLY HOSE

BED 3

5.00 D.J. POLY HOS

BED 4

1.00 D.J. POLY H05H

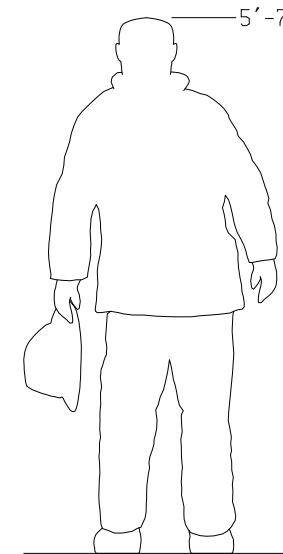

 MANUFACTURING INC.		JOB NO.	34870
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY COL	06FEB20
FOR	Consicana Fire Rescue	CHECKED BY NPE	10FEB20
DWG NO.	34870AD		SHEET SIZE D
			SHEET NO. 1 OF 1