

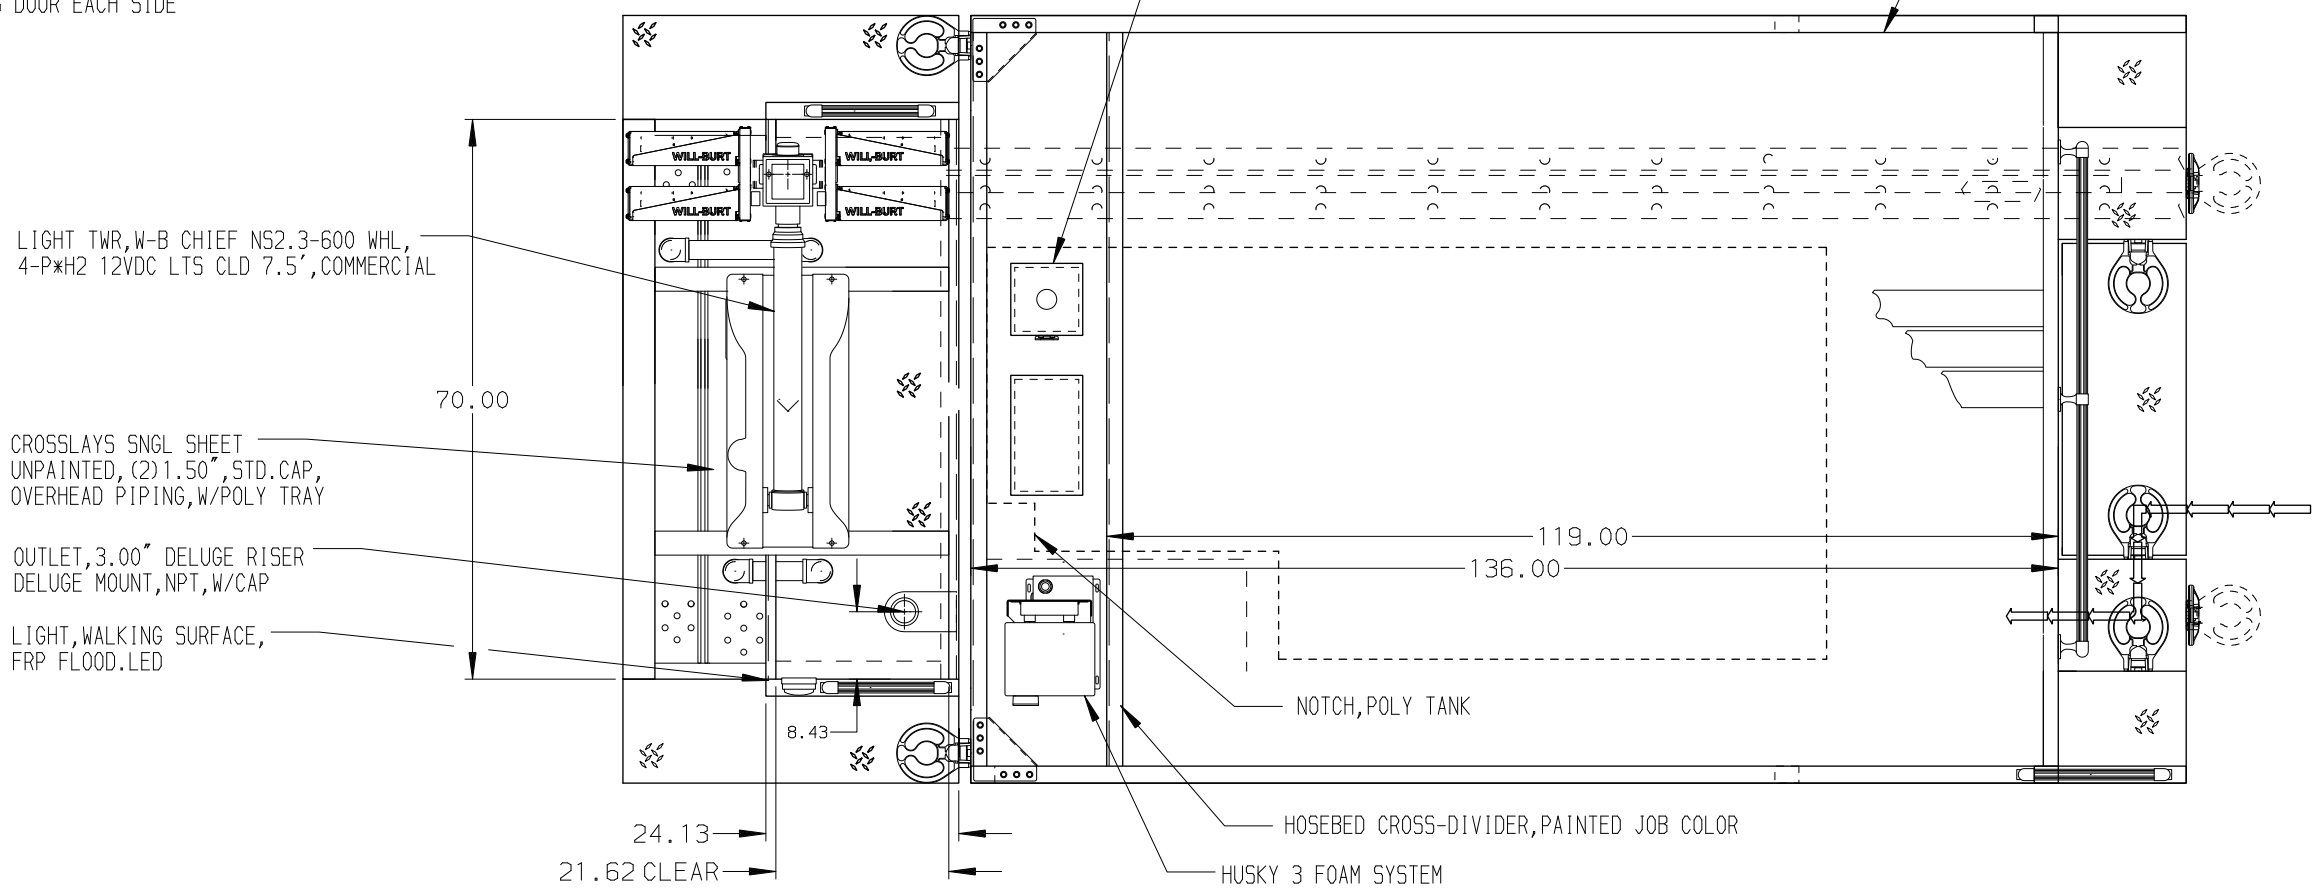
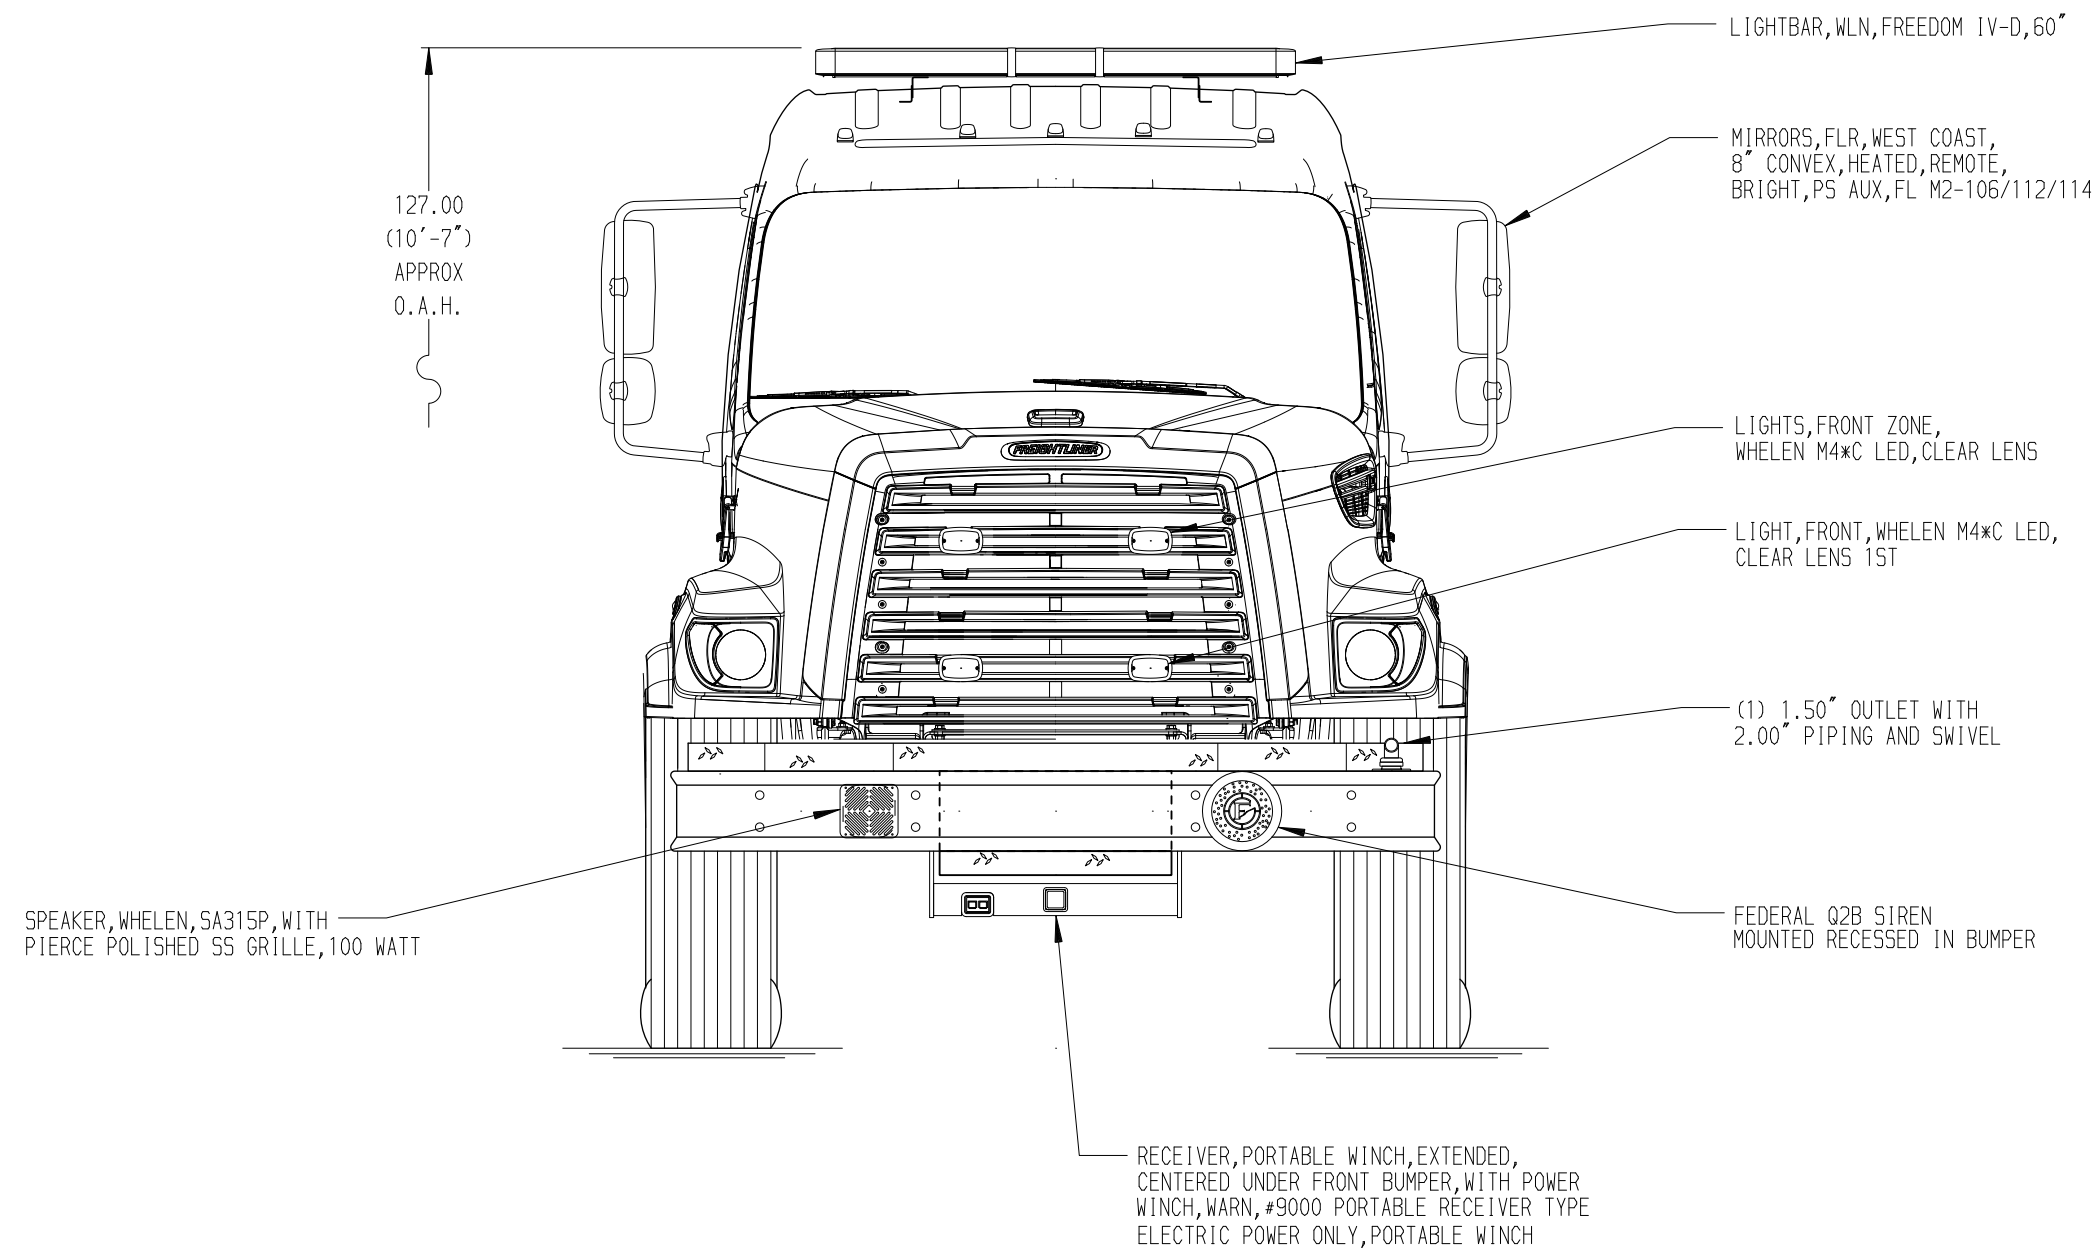
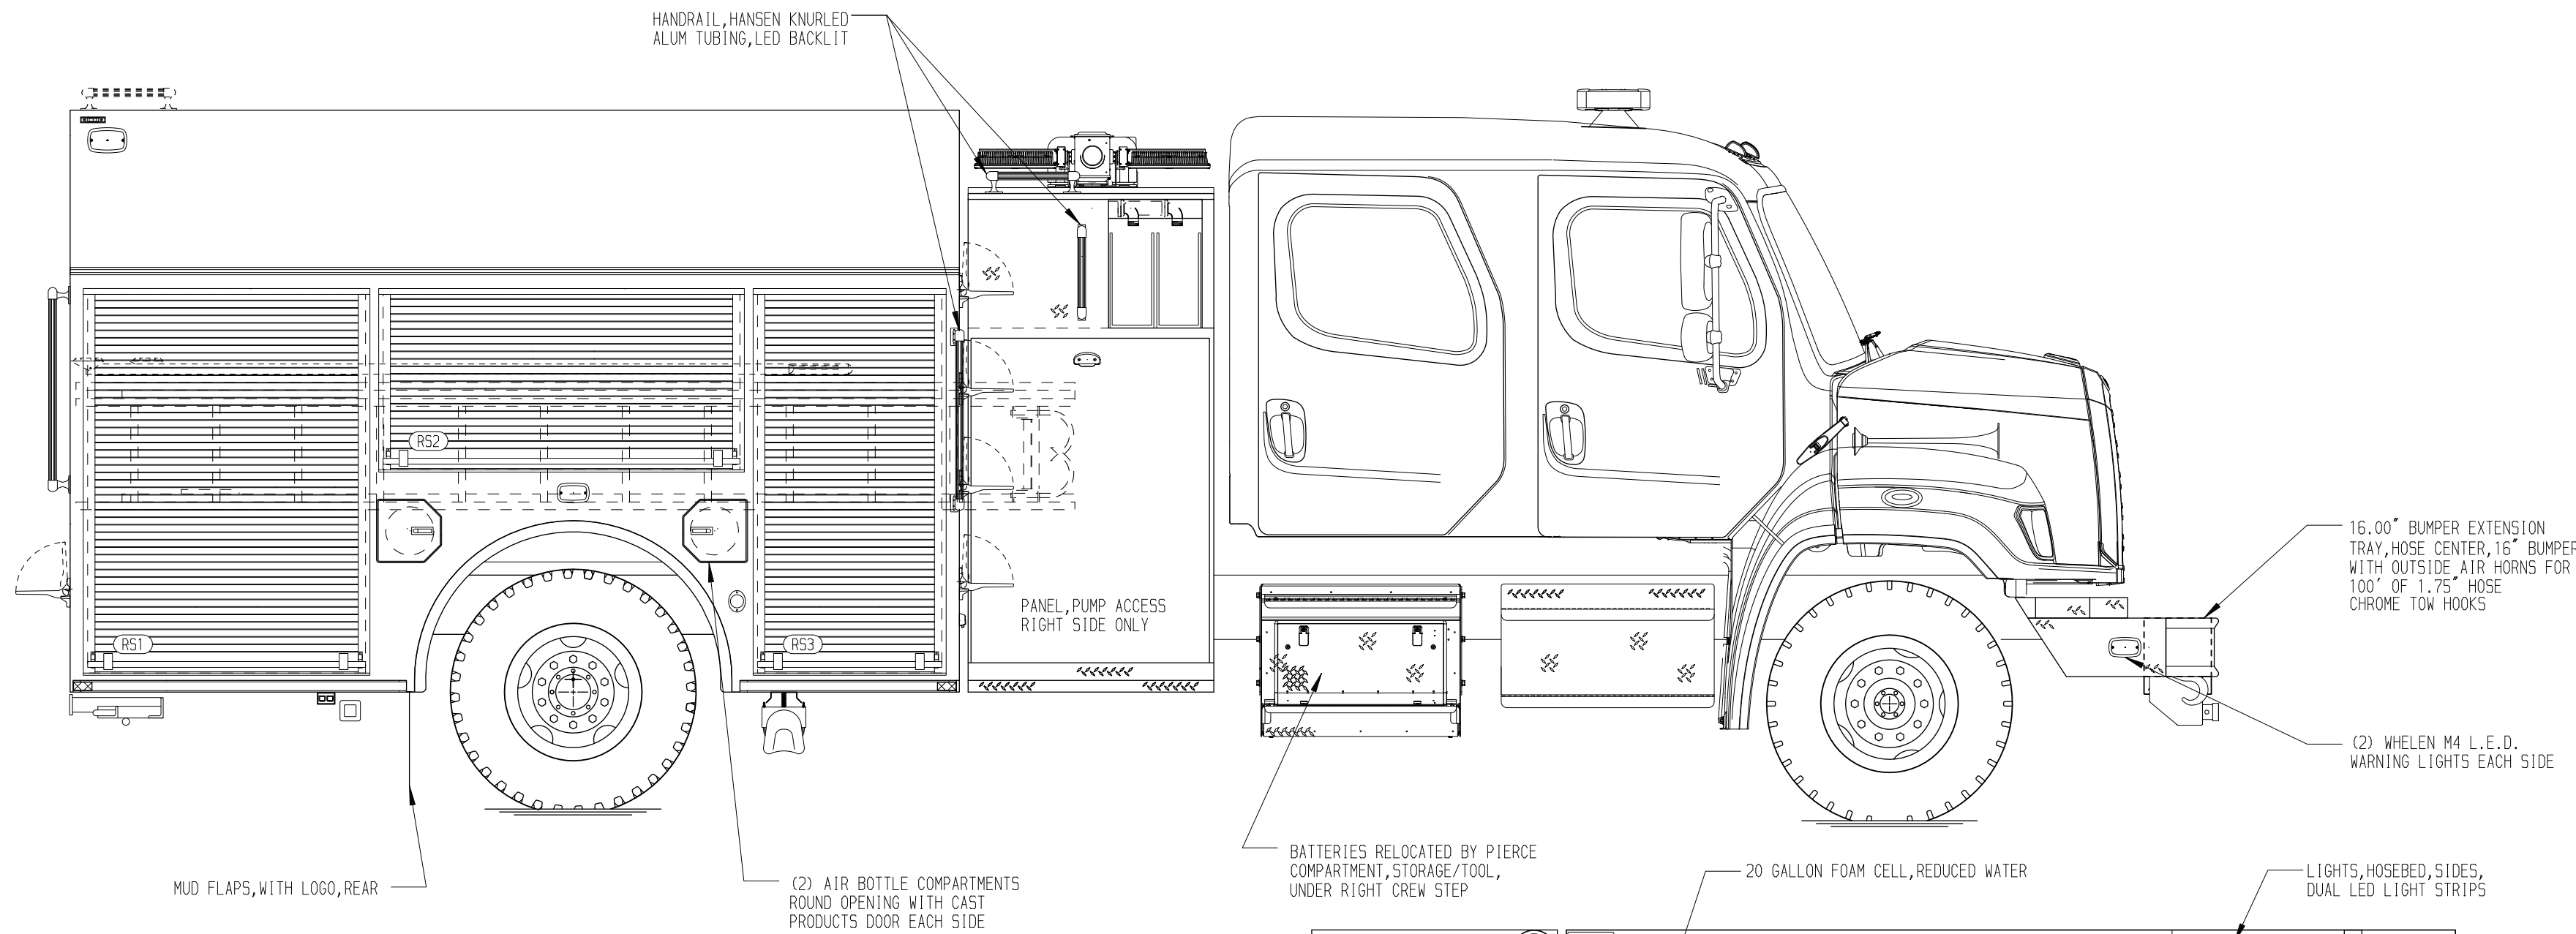


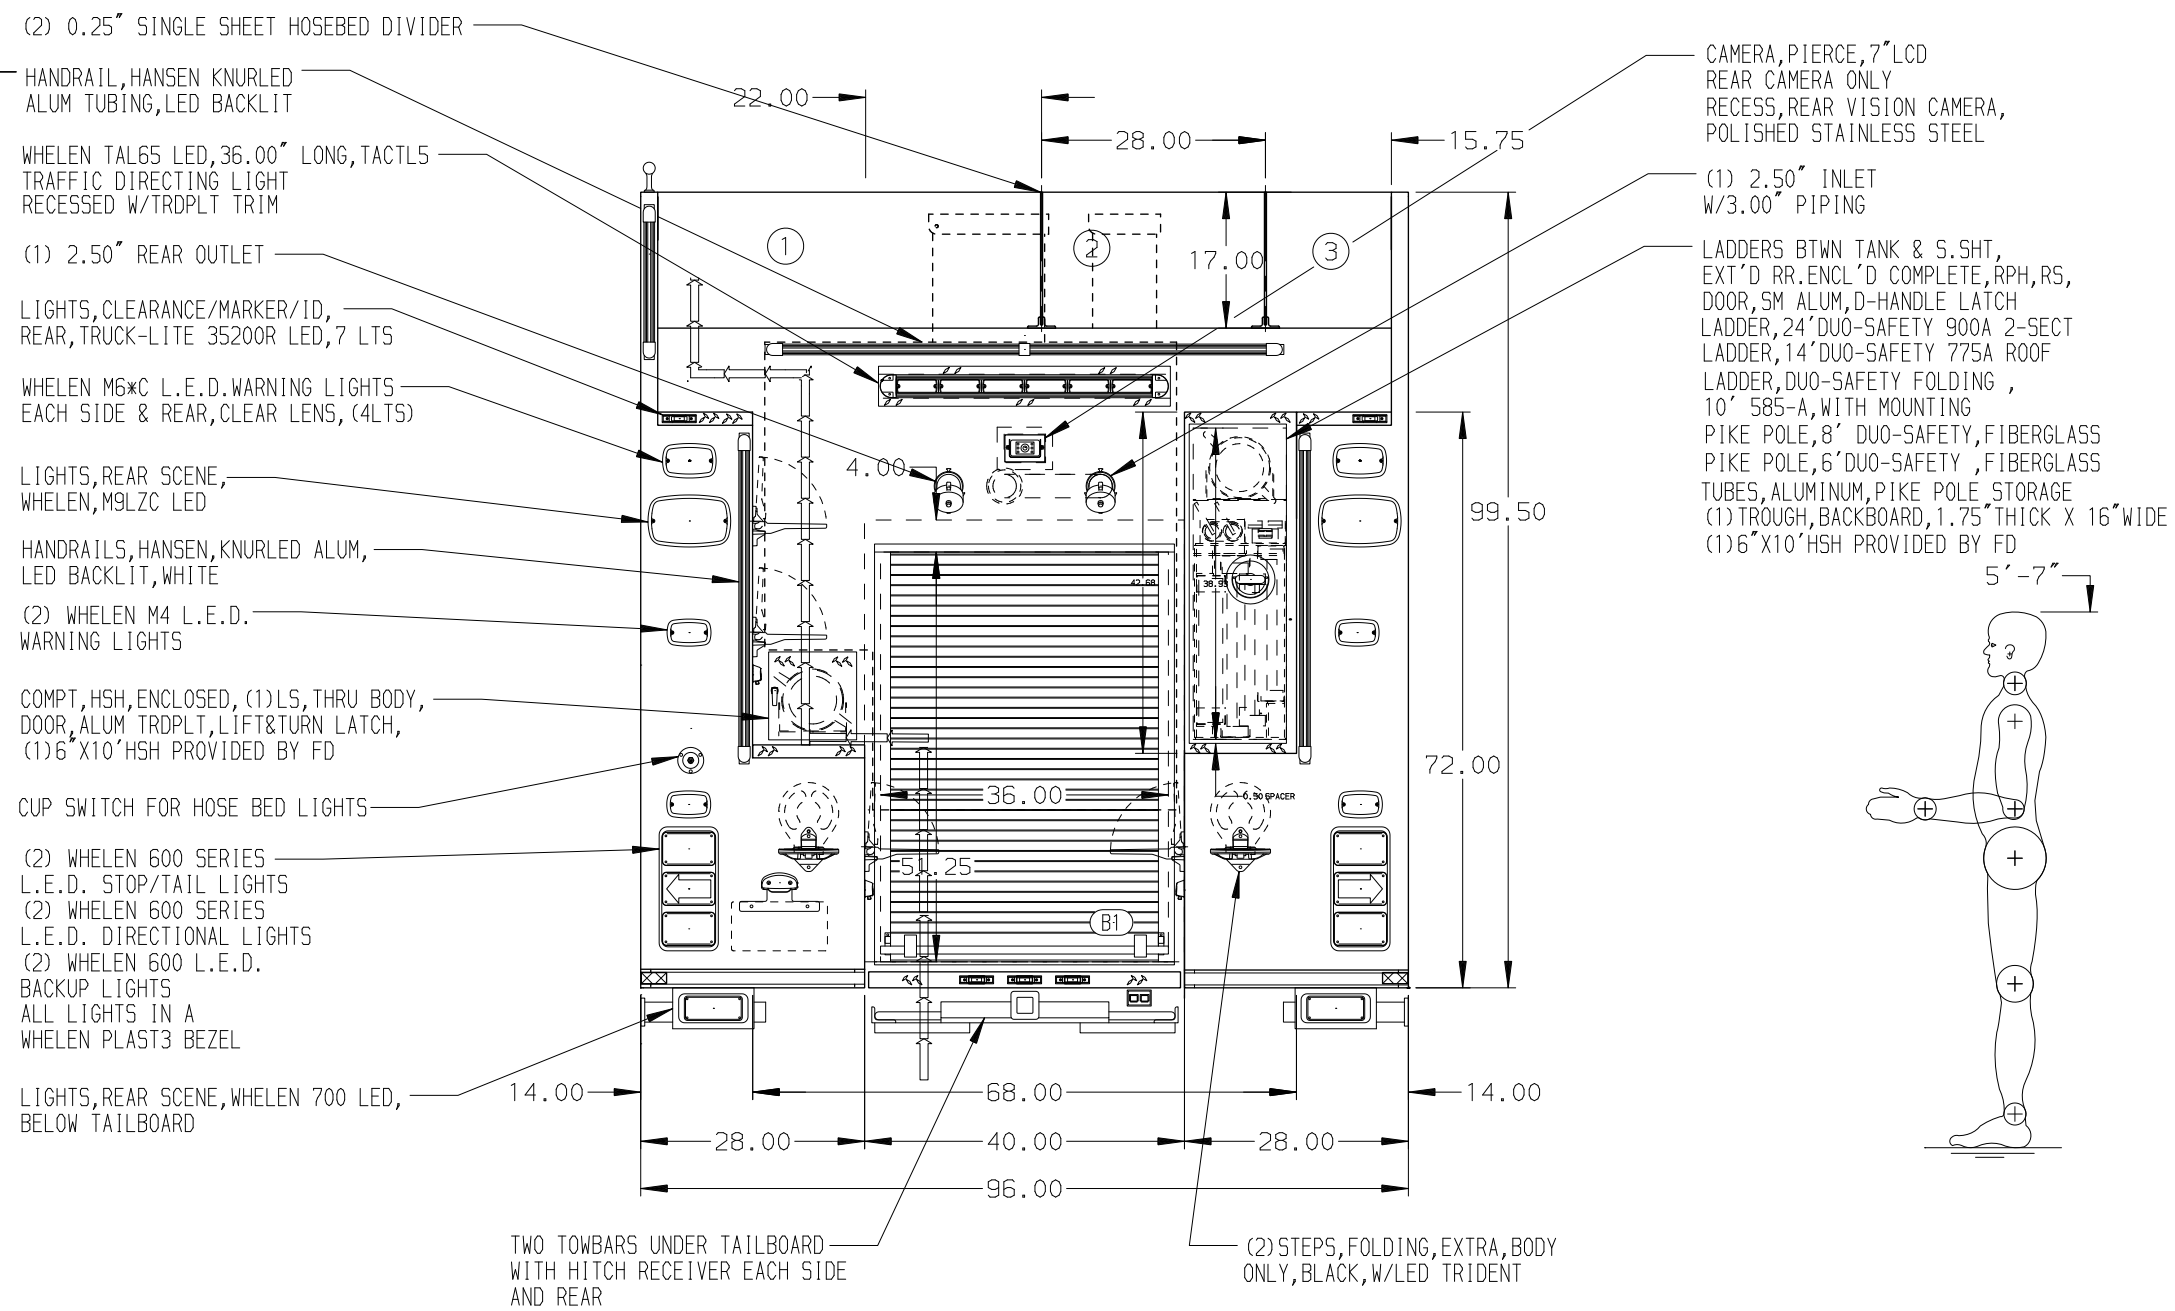

- HOSEBED CAPACITIES
- ① 1000' of 4.00" D.J. Polyester Hose
 - ② 800' of 2.50" D.J. Polyester Hose
 - ③ 300' of 2.50" D.J. Polyester Hose

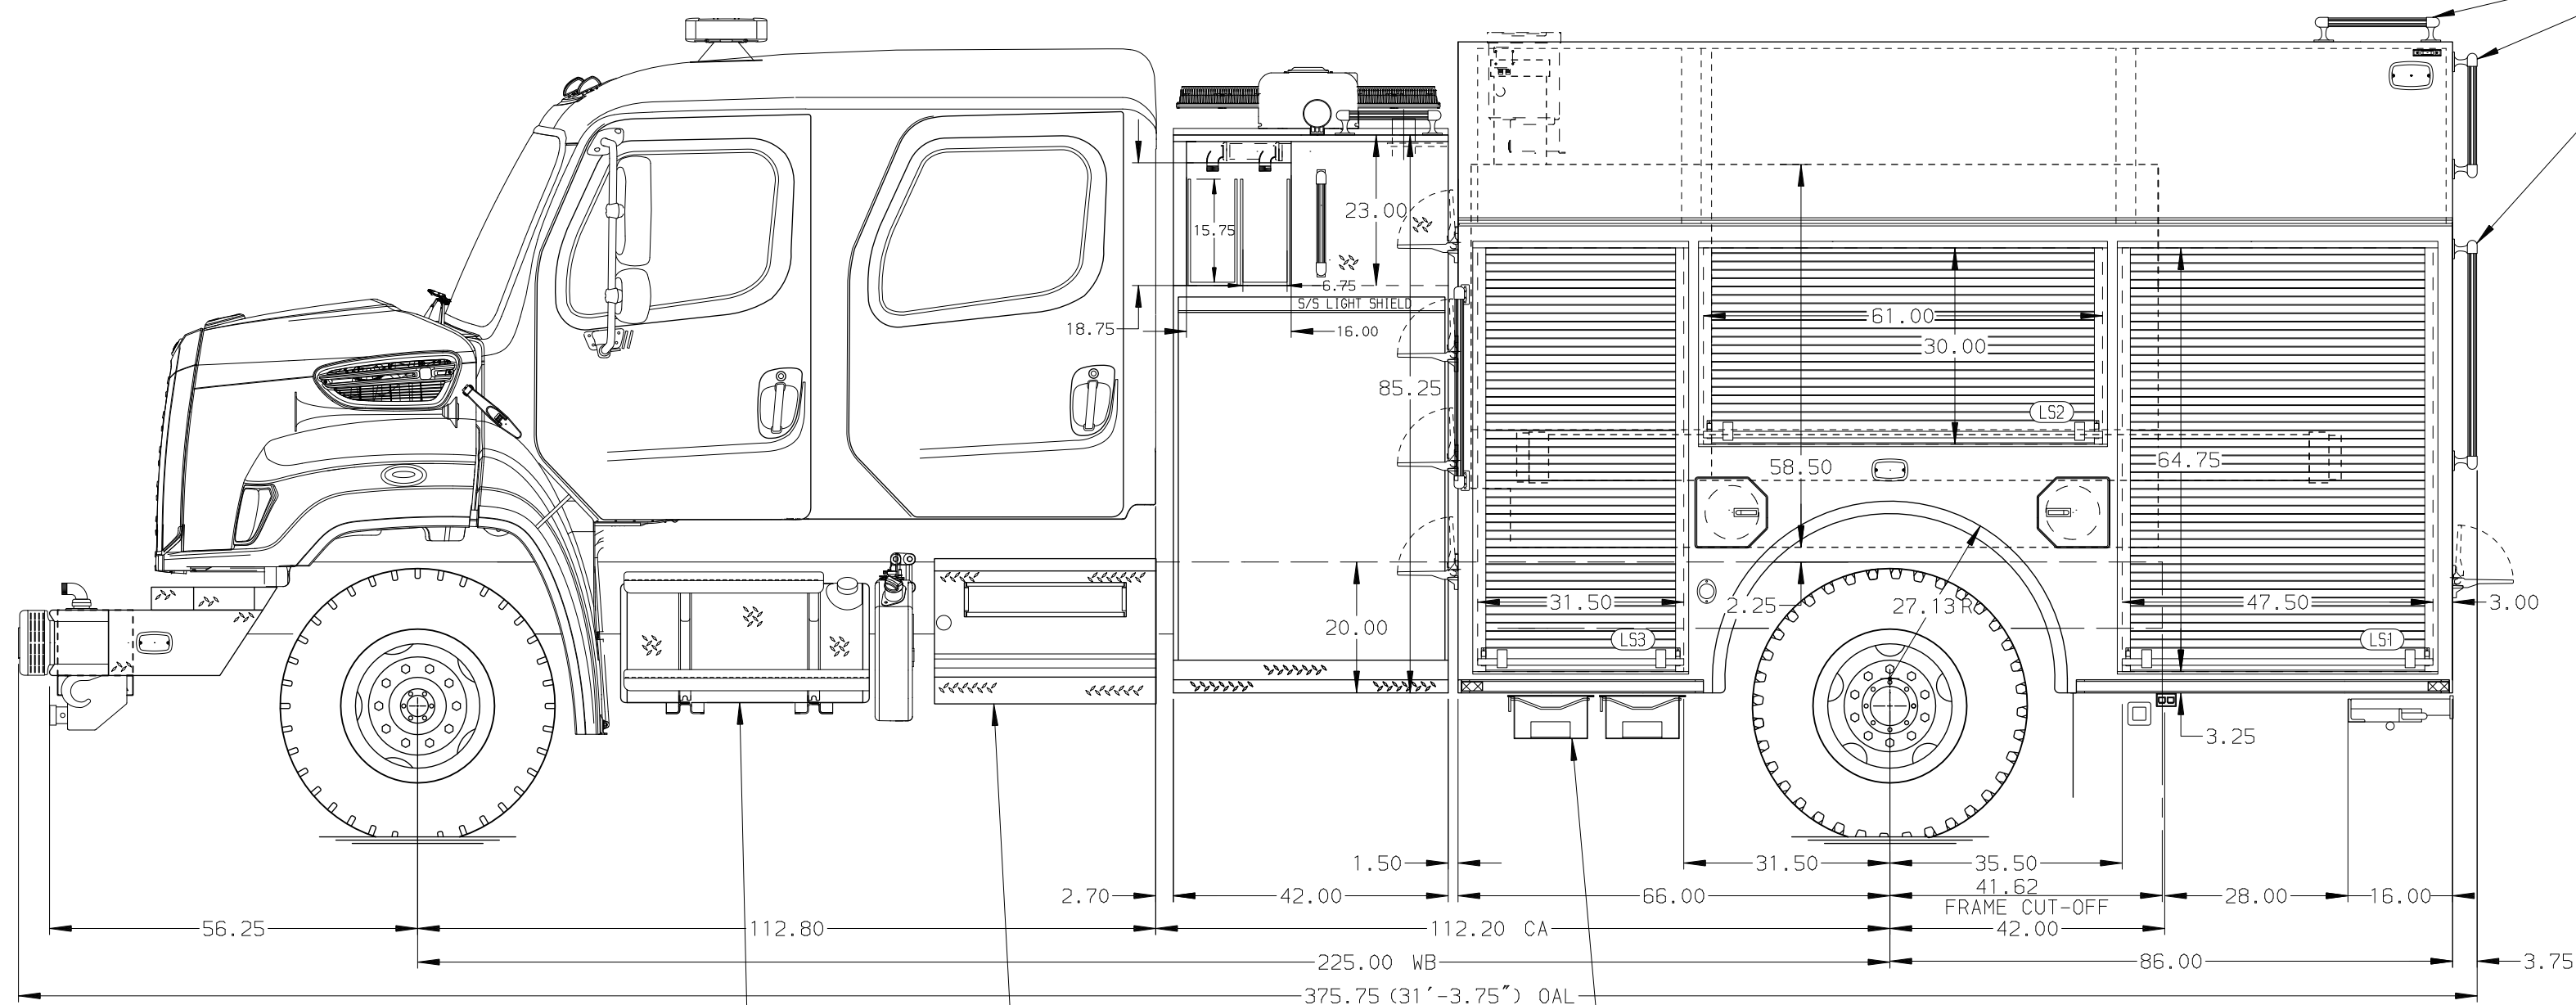

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

STEP PACKAGE, STANDARD POLISHED STEPS, W/4-WAY TRIM, FLR 4-DOOR, NFPA COMPLIANT FUEL TANK, 50 GALLON, LEFT SIDE, ALUM DEF TANK, LEFT SIDE

COMPARTMENT FOR BOOSTER REEL, REEL, BOOSTER, BELOW CREW CAB DS, 4DR 1HC/FLM2, NTLATRON GUIDES SWITCH, REEL REWIND-ONE AT REEL HOSE, BOOSTER, 150' OF 1.00"/800PSI CAPACITY, HOSE REEL 150' OF 1.00"

WHEEL CHOCKS, SAC-44-E, FOLDING MOUNTING BRKTS, CHOCKS, SAC-44-E, FOLDING, HORIZONTAL

REV	DATE	BY	CH	108SD
1	11NOV20	RHU	GSC	
2	23SEP20	RHU	GSC	



MANUFACTURING INC.

TITLE	1250-D-980P, 20 FOAM, 152" BODY, LS FULL HGT/DPT FRT, RS FULL HGT FRT&RR, FD LER, 52" SIDE CONTROL, (2) 1.5" XLAYS
FOR	NEWTON FIRE DEPARTMENT NEWTON, WEST VIRGINIA
DWG NO.	34939AD

JOB NO.	34939
SCALE	1:24
DATE	16JUN20
DRAWN BY	CRH
CHECKED BY	RWI
SHEET SIZE	D
SHEET NO.	1 OF 1