

PUMPER BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
18,000 Lb TAK-4 Axle

AXLE, REAR
24,000 Lb Dana Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
27" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY WATER TANK
500 Gallon Poly Water Tank

COMPT, PUMPER, REAR
30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE
161" RollUp Full Height Front & Rear FDLR Special Depth Upper Compartments

COMPT, PUMPER, RIGHT SIDE
161" RollUp Full Height Front & Rear FDLR Special Depth Upper Compartments

FIRE SUPPRESSION PUMPHOUSE
45" Control Zone Side Mount

PUMP
1250 GPM Waterous CS

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required


GENERATOR
Generator Not Required

Foam System
Foam System Not Required

Foam Cell
Foam Cell Not Required

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CREW CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- TEN ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- TWO POLY MOUNTING BOARDS LOCATED PER SHOP ORDER
- ONE ADJUSTABLE PARTITION LOCATED IN HATCH COMPARTMENT PER SHOP ORDER
- TWO 120V 6-PLACE RECEPTABLES LOCATED PER SHOP ORDER

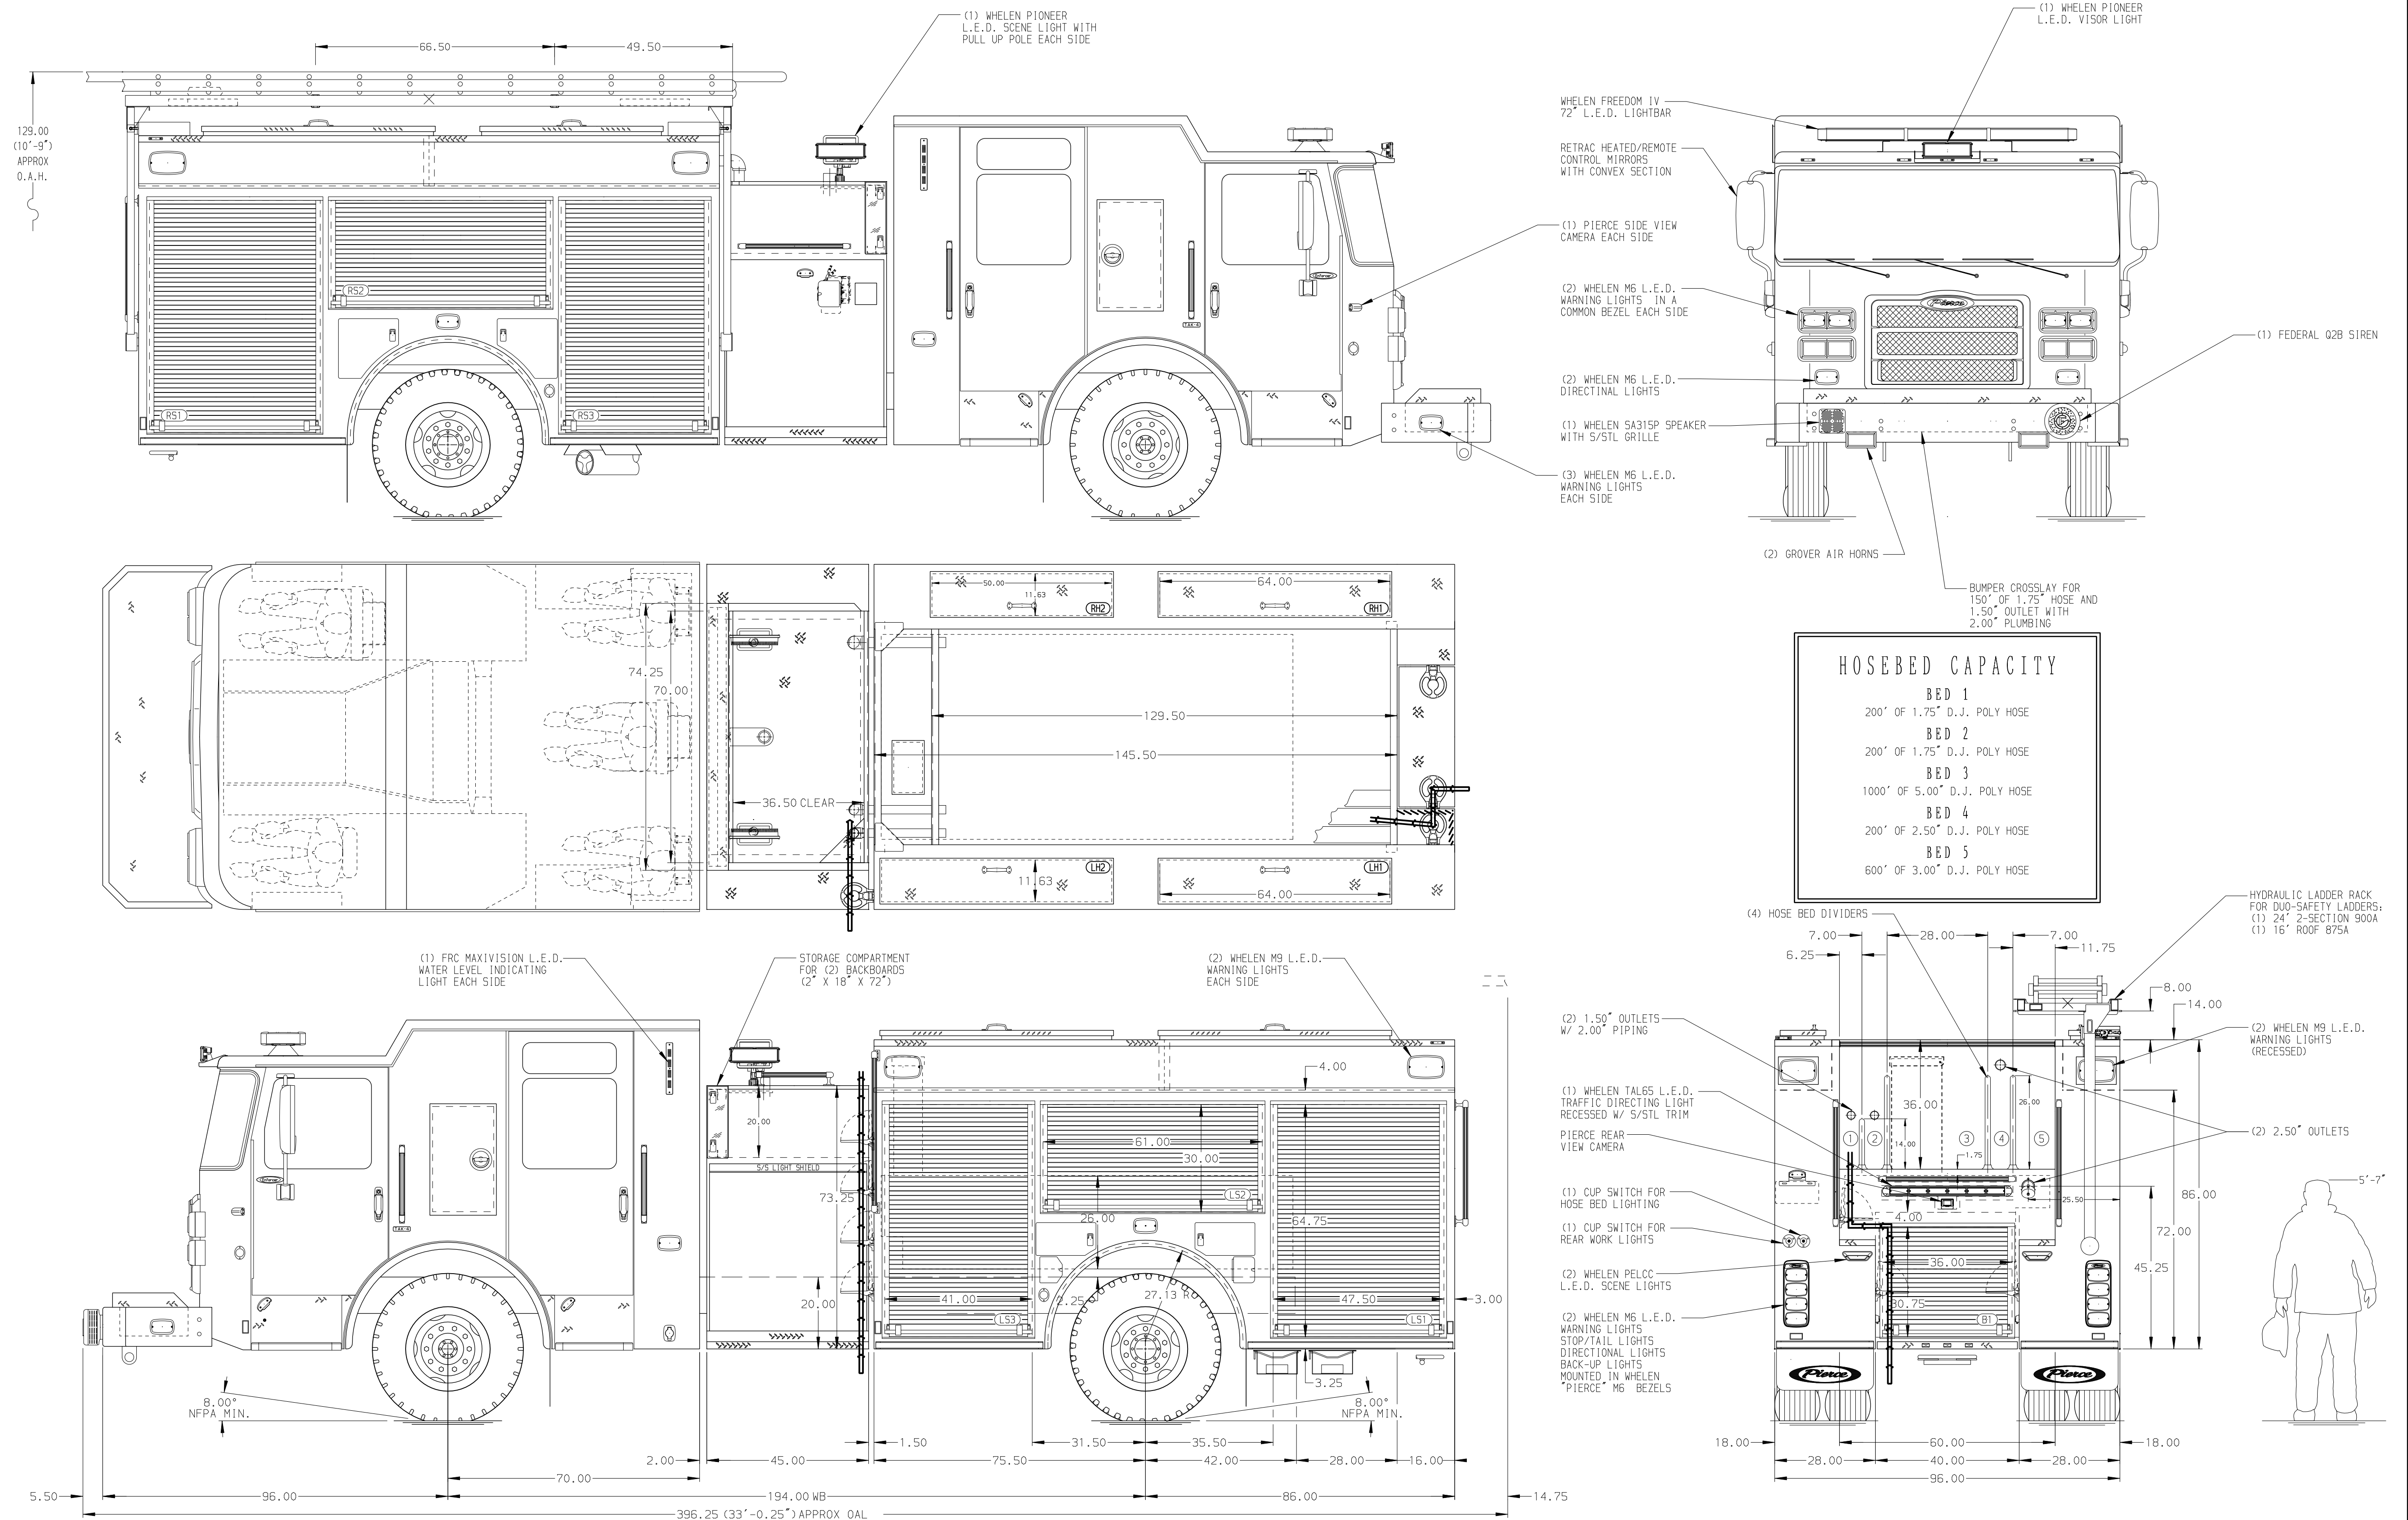

HOSEBED CAPACITY

BED 1	200' OF 1.75" D.J. POLY HOSE
BED 2	200' OF 1.75" D.J. POLY HOSE
BED 3	1000' OF 5.00" D.J. POLY HOSE
BED 4	200' OF 2.50" D.J. POLY HOSE
BED 5	600' OF 3.00" D.J. POLY HOSE

		JOB NO.	34944
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	COL
FOR	South Daytona Fire Department	CHECKED BY	NPE
DWG NO.	34944AD	SHEET SIZE	SHEET NO.
		D	1 OF 1

CHASSIS DATA	MAKE	PIERCE
MODEL	ENFORCER	
REV	DATE	BY
01APR20	COL	PPE
10MAR20	COL	PPE