
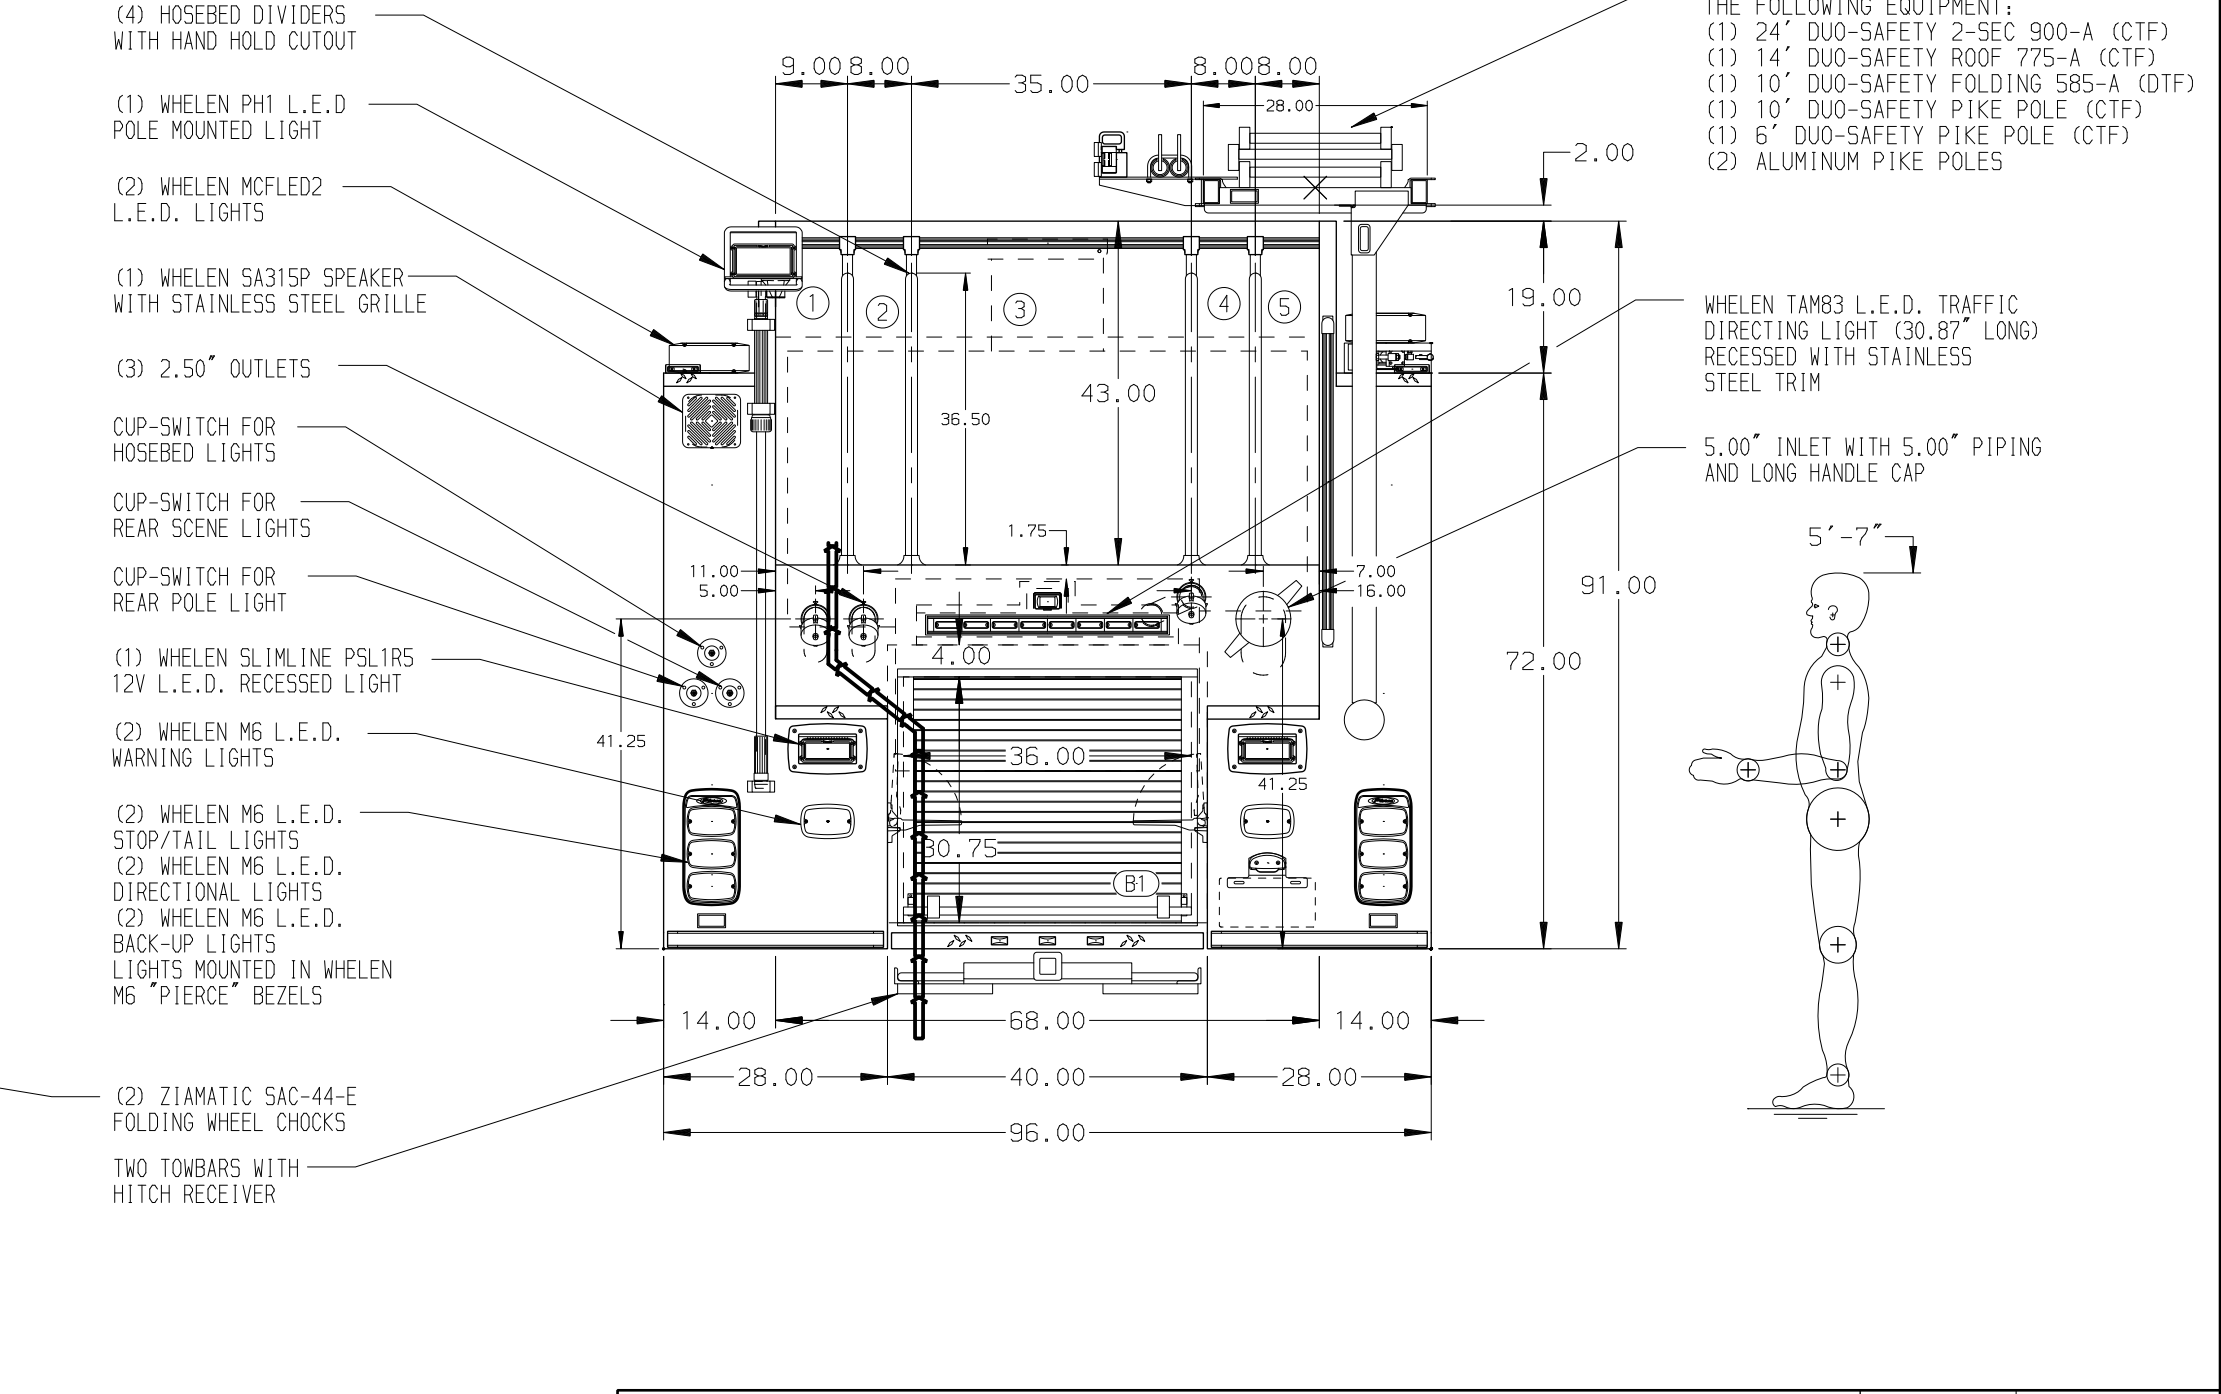


- HOSEBED CAPACITIES
- ① 300' OF 2.50" HOSE
 - ② 300' OF 2.50" HOSE
 - ③ 1000' OF 5.00" HOSE
 - ④ 300' OF 1.75" HOSE
 - ⑤ 300' OF 3.00" HOSE

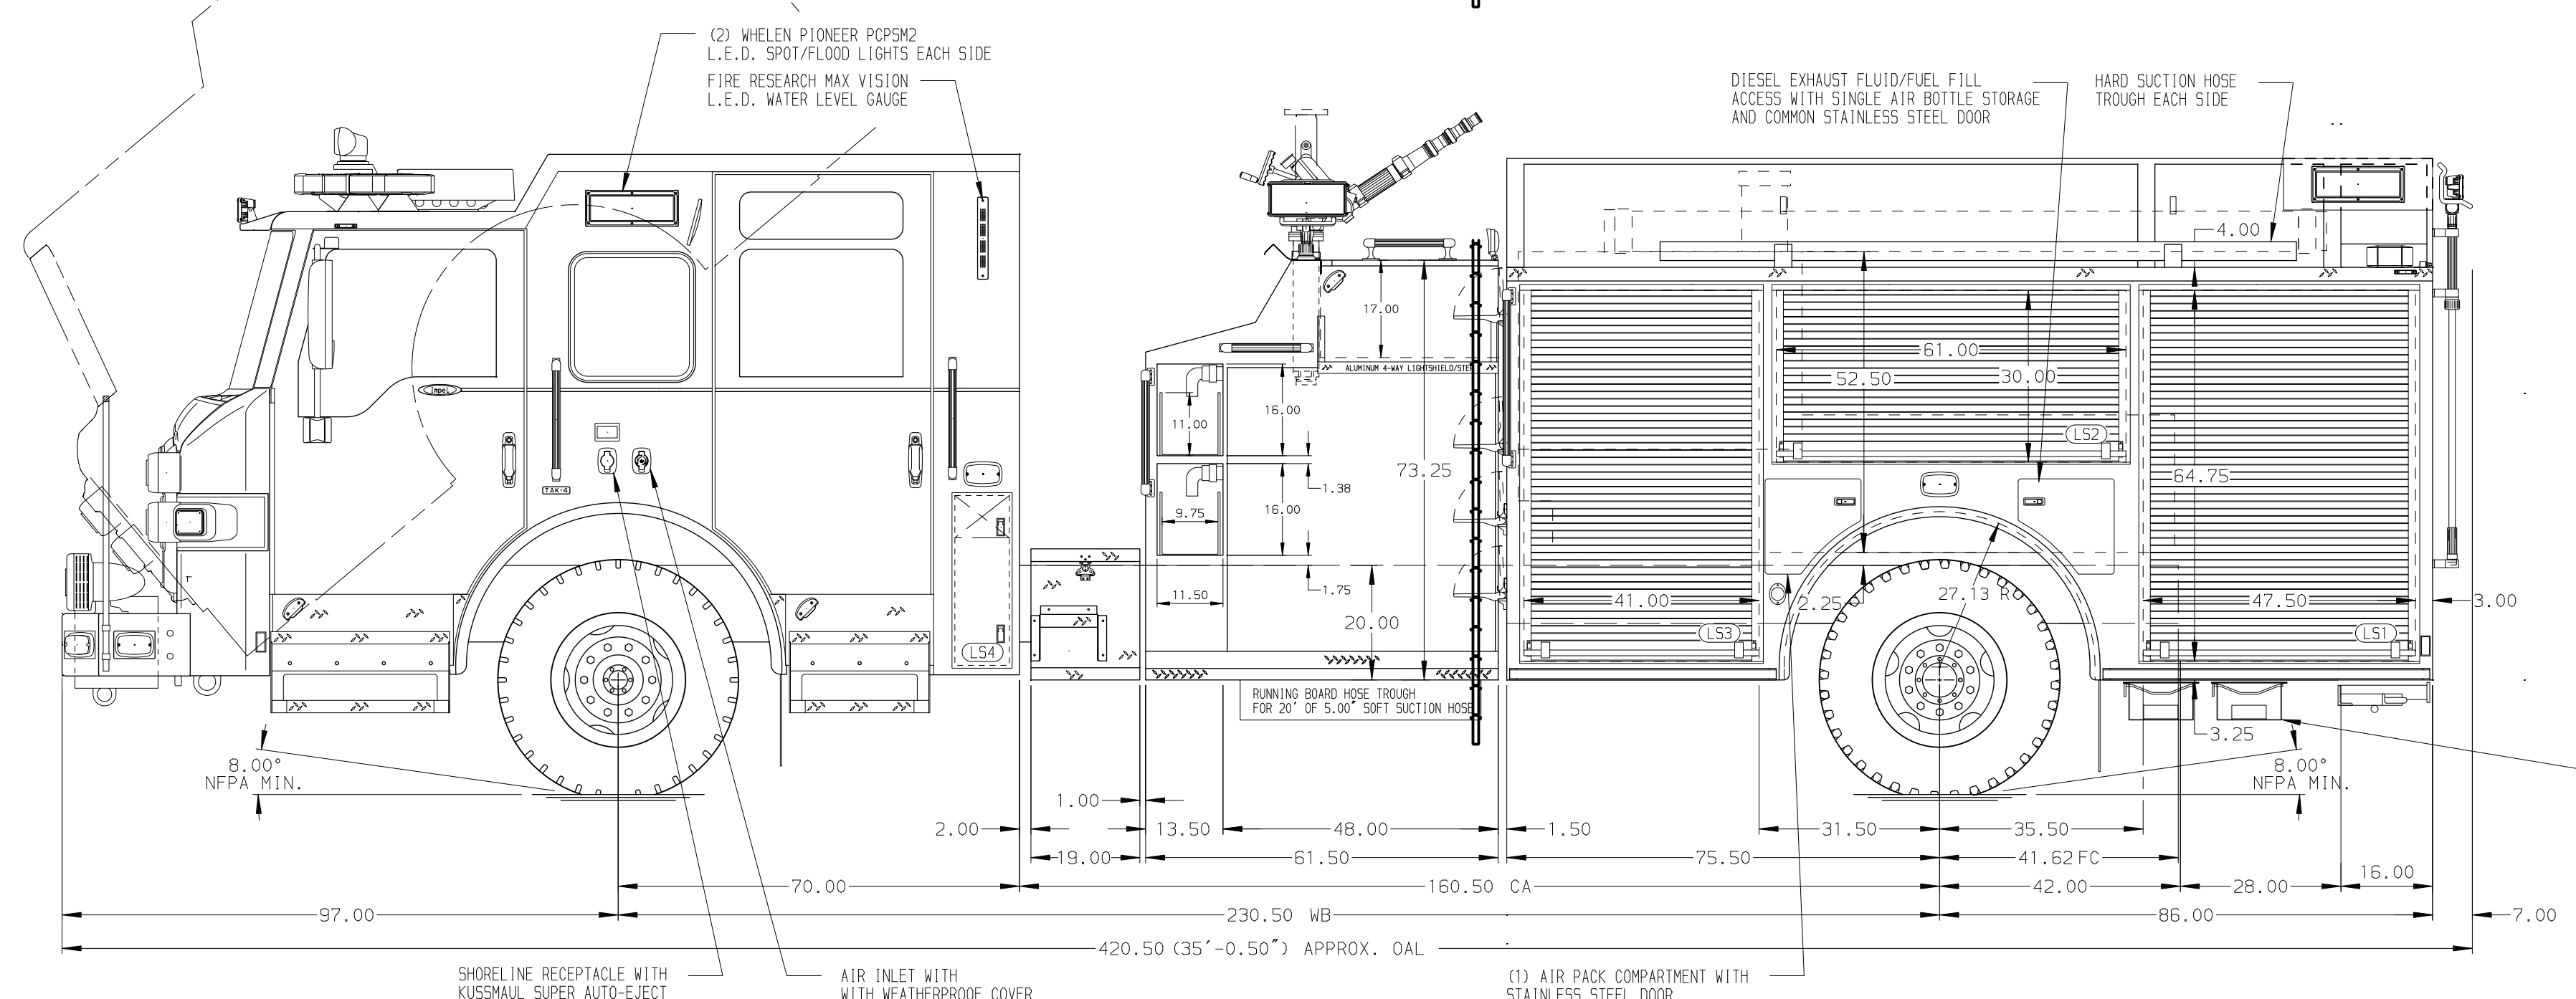

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. KUSSMAUL BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED IN ALL BODY COMPARTMENTS
3. PARTITION BETWEEN COMPARTMENTS LST/BI AND RSI/BI
4. ONE 120V DUPLEX RECEPTACLE LOCATED IN EACH SIDE BODY COMPARTMENT
5. TWO 120V DUPLEX RECEPTACLES LOCATED IN CAB

		JOB NO.	35054
		SCALE	DATE
TITLE 2000-D-750P WATER TANK, 161" FH FDLER PUMPER BODY HYDRAULIC LADDER RACK, DELUGE		DRAWN BY	20MAY20
FOR TINTON FALLS FIRE DISTRICT #1 TINTON FALLS, NJ		CHECKED BY	10JUN20
DWG NO. 35054AD		SHEET SIZE	SHEET NO.
		D	1 OF 1

REV	DATE	BY	CH	IMPEL FR
20AUG20	COL	DTS		
19JUN20	JWO	NPE		