


- HOSEBED CAPACITIES
- ① 500' OF 3.00" D.J. HOSE
100' OF 1.75" D.J. HOSE ON TOP
 - ② 1000' OF 5.00" D.J. HOSE
 - ③ 500' OF 2.50" D.J. HOSE

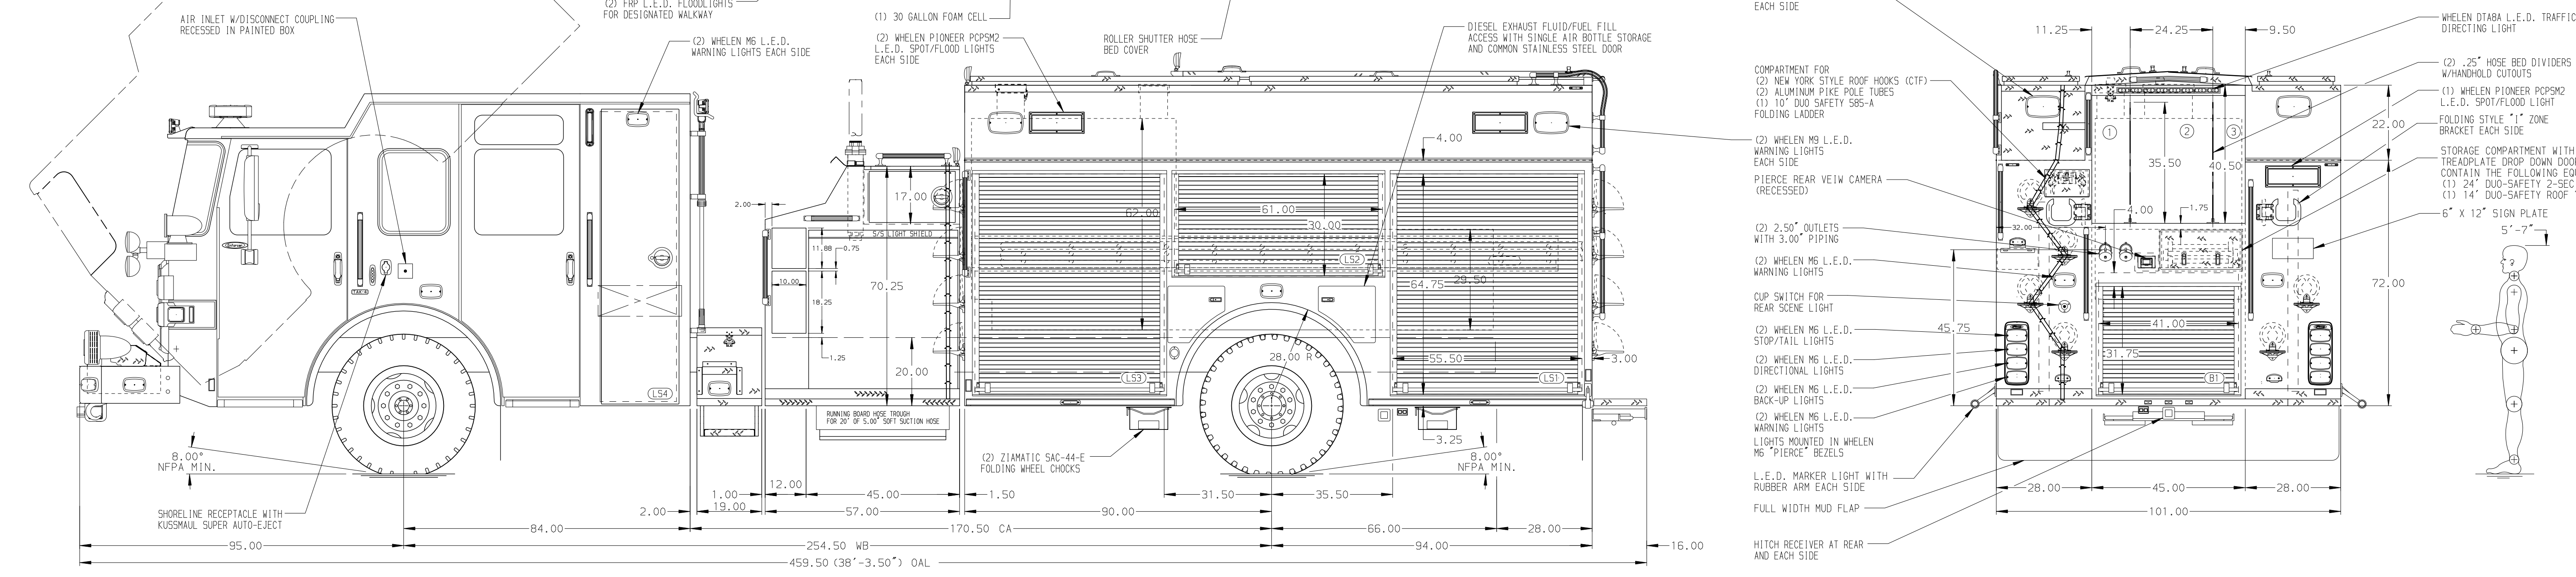

ALUMINUM BODY

MAXIMUM O.A.H. 124.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ANCHOR PLATE FOR NEDERMAN EXHAUST SYSTEM HOSE LOCATION TBD
2. KUSSMAUL BATTERY CHARGER LOCATED IN COMPARTMENT LH2
3. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. 20A 120V DUPLEX RECEPTACLE LOCATED HIGH ON THE RIGHT SIDE IN COMPARTMENTS L54 AND R54

REV	DATE	BY	CH	ENFORCER
1	19NOV20	JWO	PPE	CHASSIS DATA
2	16SEP20	JWO	PPE	CHASSIS DATA
3	12AUG20	JWO	PPE	PIERCE
4	11AUG20	JWO	PPE	PIERCE
5	07AUG20	JWO	PPE	MODEL

Pierce MANUFACTURING INC.

JOB NO. 35104

SCALE 1:24 DATE

TITLE 1500-D-750P W/30G-40G FOAM, 184", FULL HEIGHT. HDRP (2) SPD-LAYS, DELUGE

FOR VILLAGE OF ROSEMONT PUBLIC SAFETY ROSEMONT, ILLINOIS

DWG NO. 35104AD-SH1

DRAWN BY JWO DATE 24APR20

CHECKED BY NPE DATE 27APR20

SHEET SIZE D SHEET NO. 1 OF 1