

Enforcer Chassis

27,000 lb Meritor Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS P

19" Extended Stainless Steel

7010 Enforcer Cab

25.50" FF Rollup Rear Compt

171" Rollup Full Height & Depth Front & Rear

171" Rollup Full Height & Depth Front & Rear

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity

(1) 2.50" Standard Capacity



SpeedLays Not Required

Generator Not Required


Husky 3 Single Agent Foam System

20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

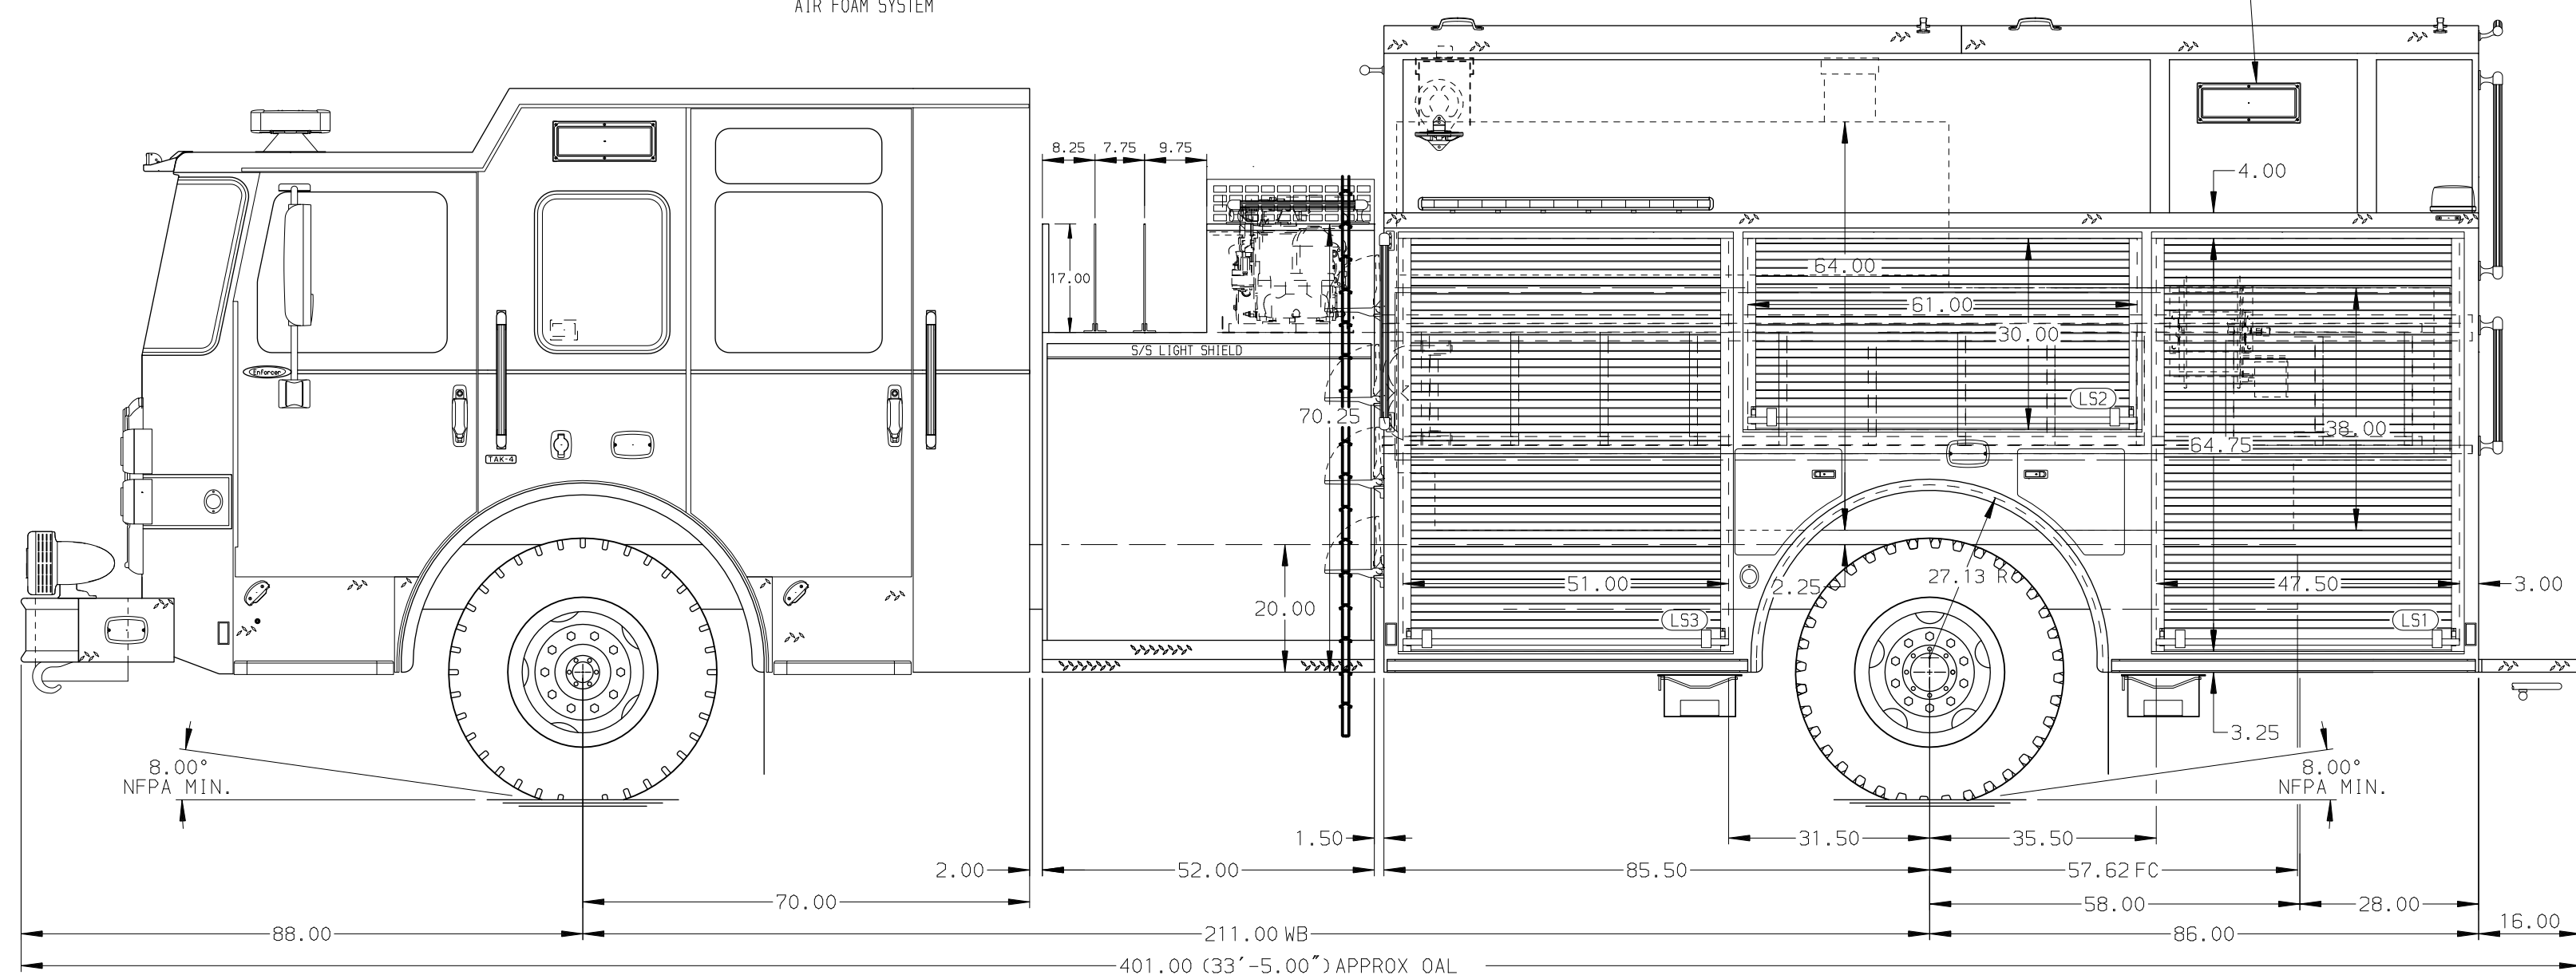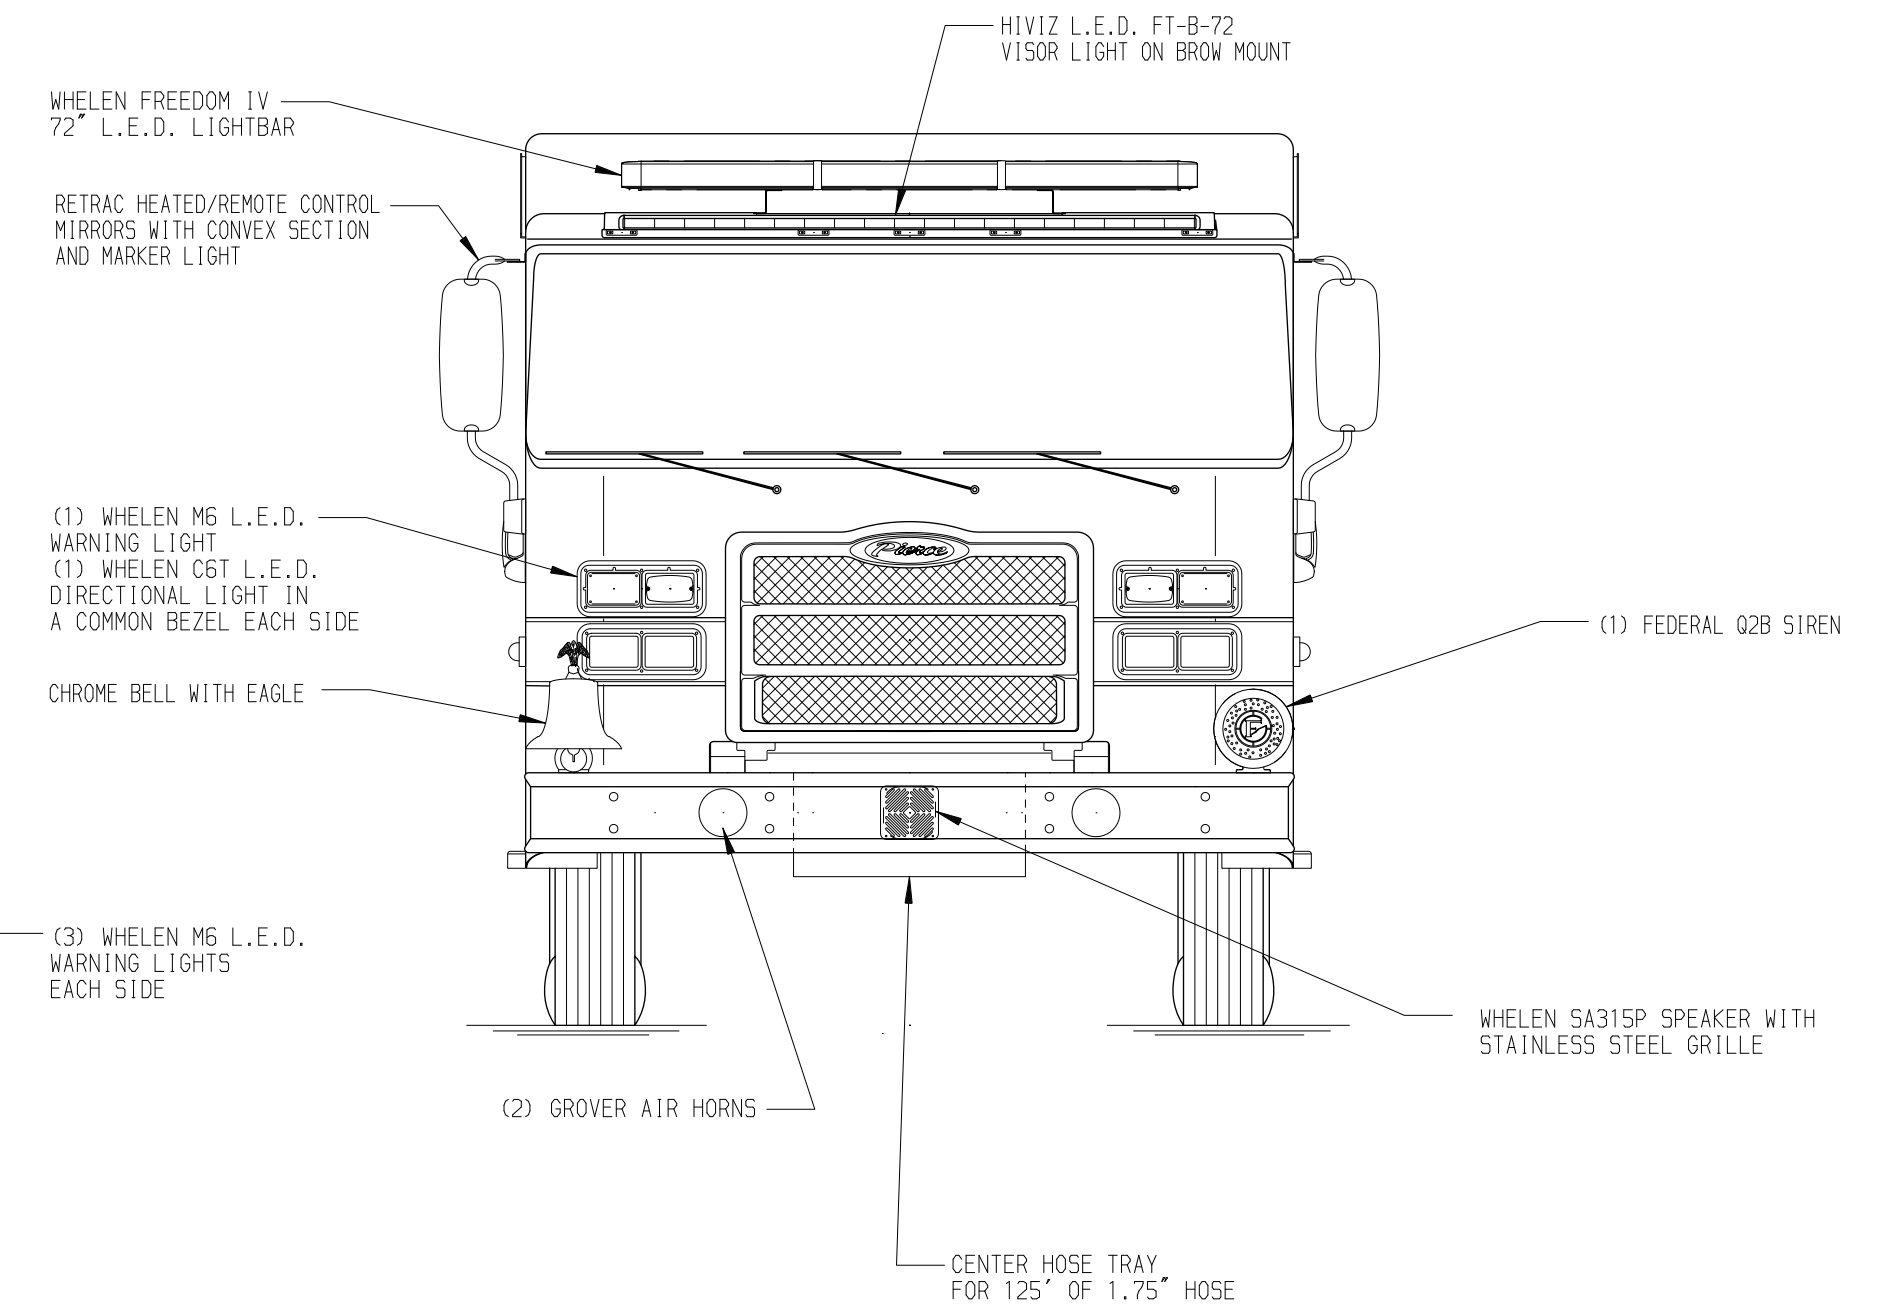

200' OF 3.00" D.J. POLY HOSE

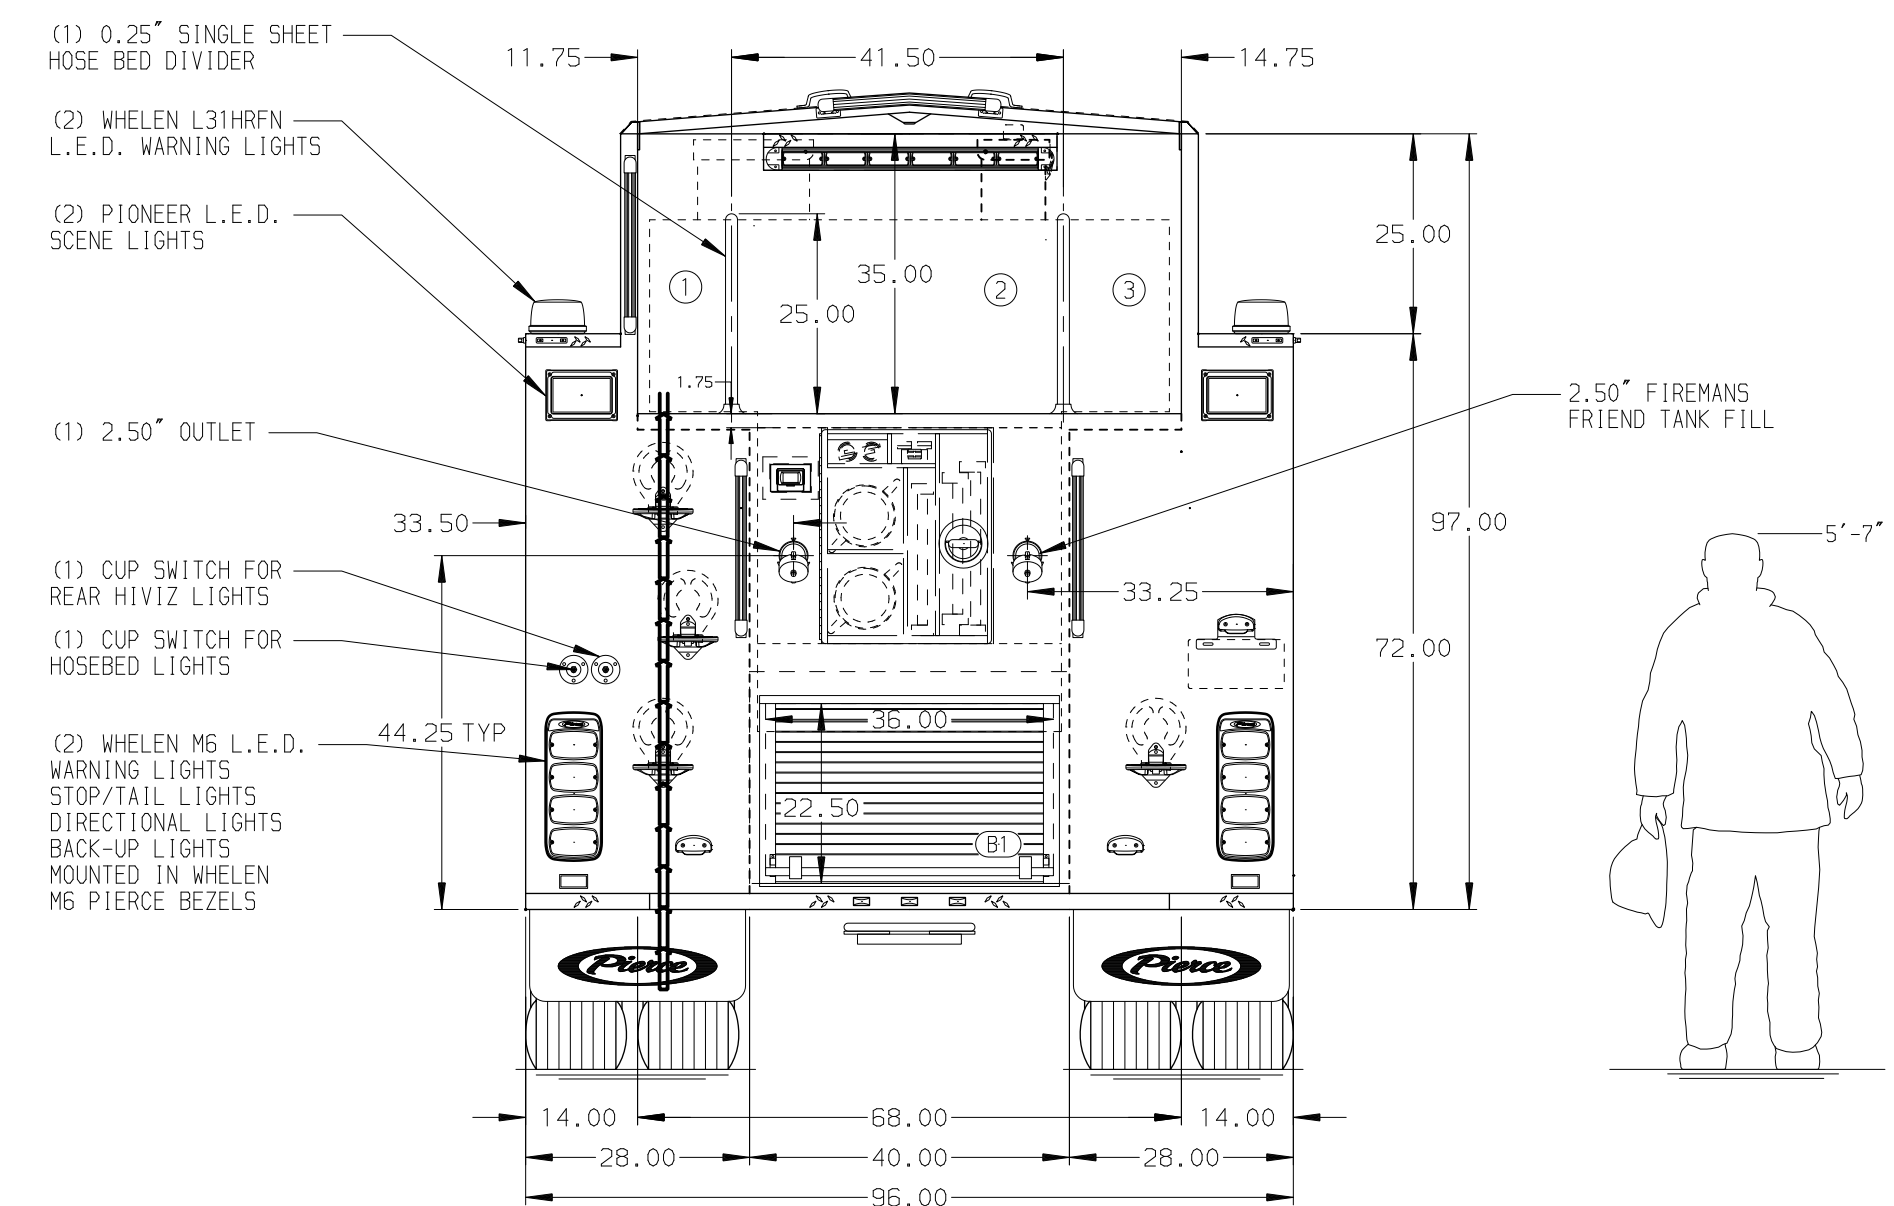

CUSTOMER APPROVAL					 MANUFACTURING INC.		JOB NO.	35347
APPROVED BY: _____							SCALE	DATE
DATE: _____							DRAWN BY	MMF
				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	MMF	04MAY20
				MAKE	FOR	Pierce Field Unit	CHECKED BY	6MAY20
				PIERCE		Appleton, Wisconsin	NPE	
	10AUG20	MMF	THS	MODEL	DWG NO.	35347AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	ENFORCER			D	1 OF 1