
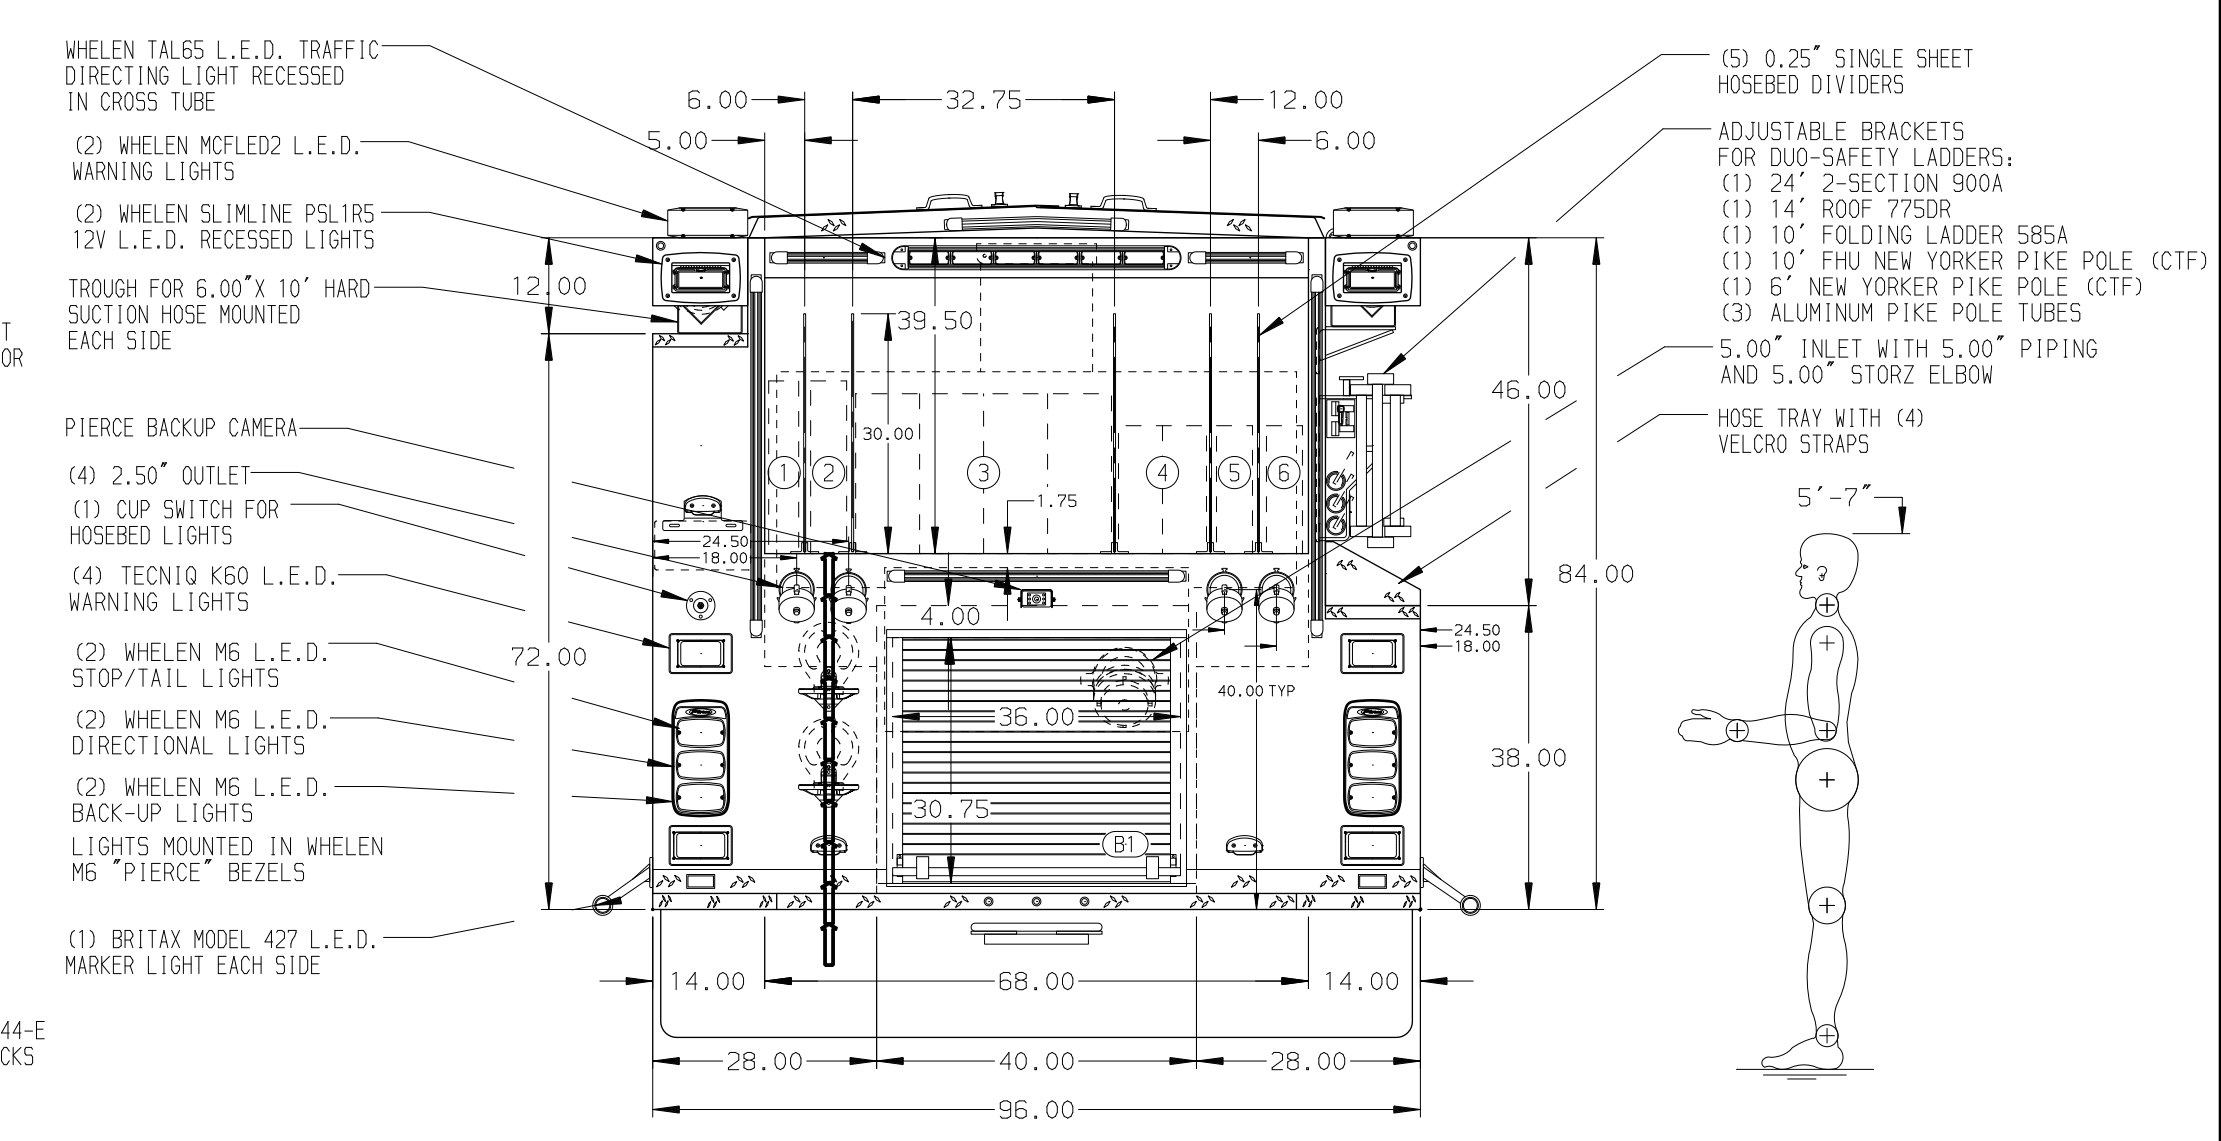


- HOSEBED CAPACITIES**
- ① - 400' OF 2.00" MERCEDES HOSE
 - ② - 400' OF 2.50" MERCEDES HOSE
 - ③ - 1200' OF 5.00" MERCEDES HOSE
 - ④ - 600' OF 3.00" MERCEDES HOSE
 - ⑤ - 300' OF 2.50" MERCEDES HOSE
 - ⑥ - 300' OF 2.50" MERCEDES HOSE

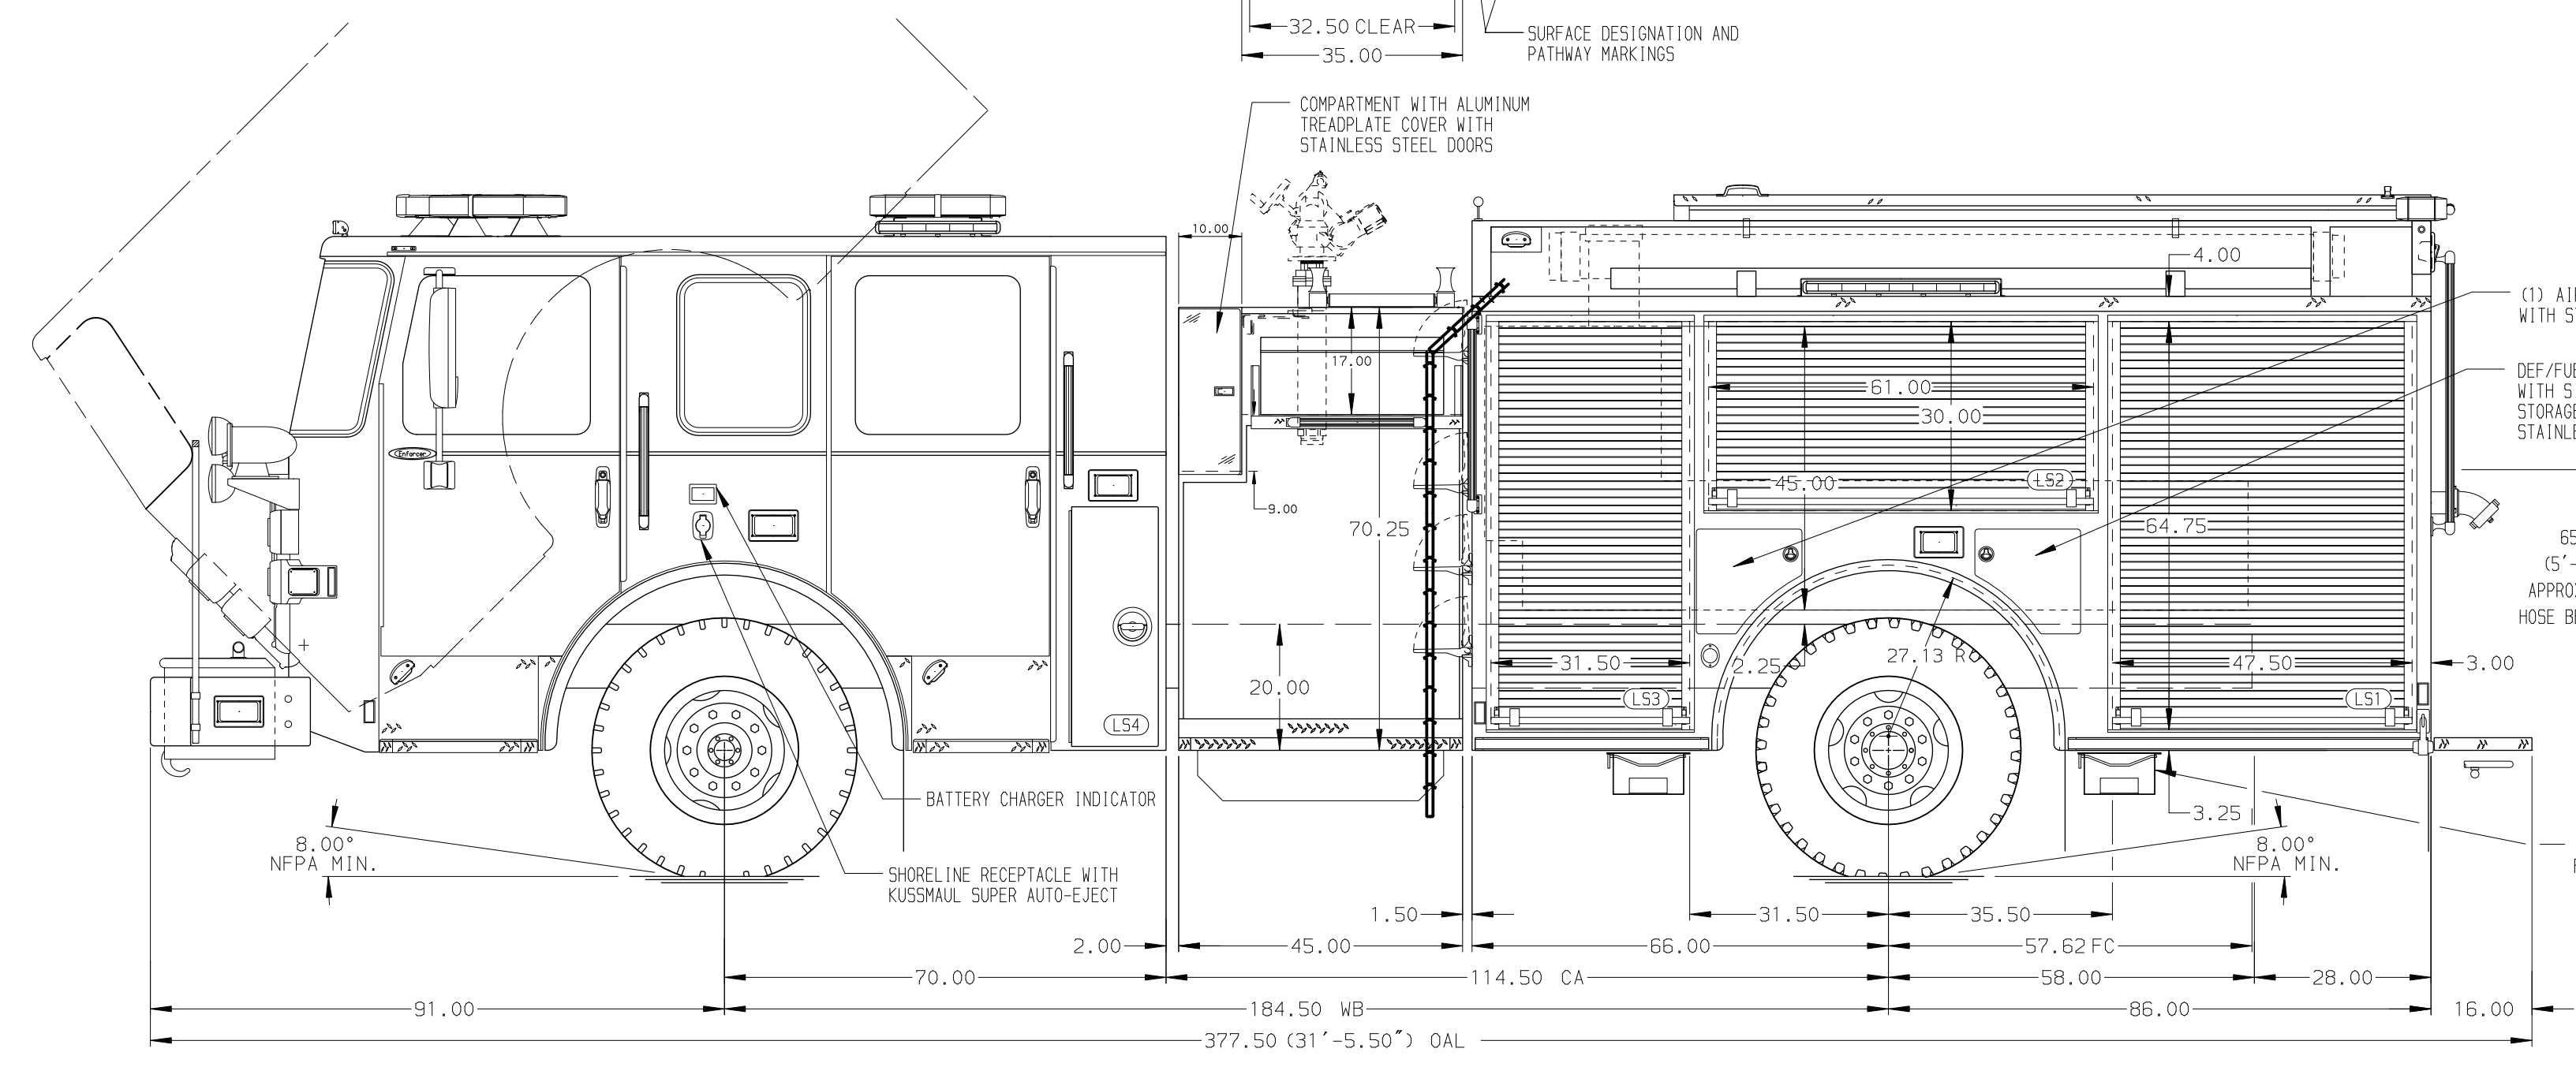

STAINLESS STEEL BODY

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. ONEPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- 3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 4. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED L51, L52, L53, R51, R52 AND B1
- 5. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS L53 AND R52; TWO IN L51
- 6. PAC TRAC ON BACK WALL OF COMPARTMENTS L52 AND L53
- 7. 120V DUPLEX RECEPTACLE LOCATED IN COMPARTMENT L51
- 8. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DS PUMP PANEL

REV	DATE	BY	CH	ENFORCER
15MAR21	LME	DTS		
15JAN21	LME	DTS		
04NOV20	LME	GKH		
02OCT20	CDU	KOU		

		JOB NO.	35430
		SCALE	DATE
TITLE	2000-D-500 GAL POLY, 152" FH LS, LOW RS, FDLER BODY COMPARTMENT IPO XLAYS, DELUGE, BOOSTER REEL	DRAWN BY	LME
FOR	LAFAYETTE FIRE COMPANY LANCASTER, PENNSYLVANIA	CHECKED BY	CDU
DWG NO.	35430AD	SHEET SIZE	D
		SHEET NO.	1 OF 1