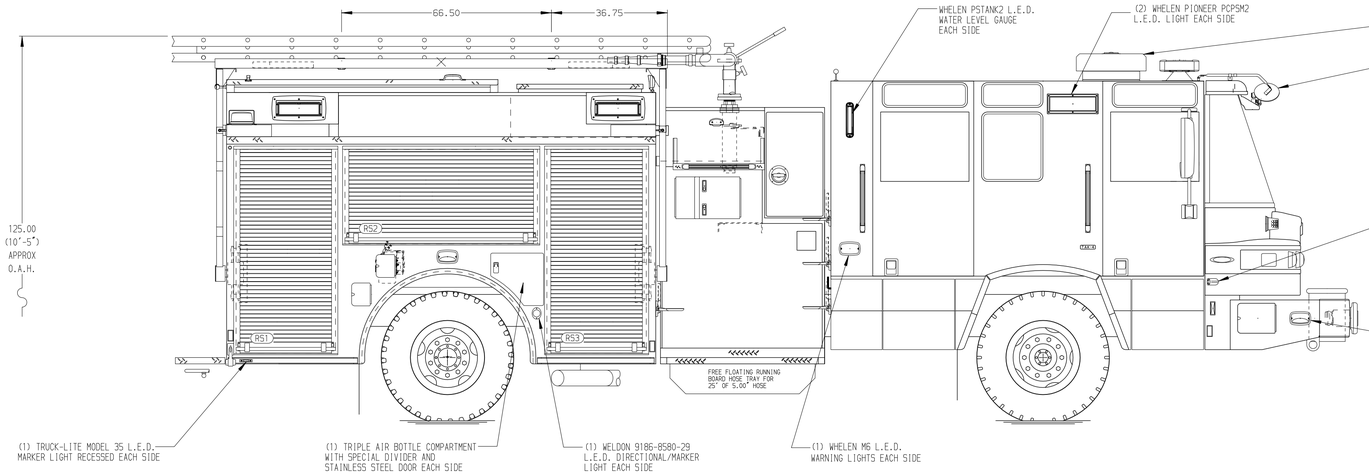

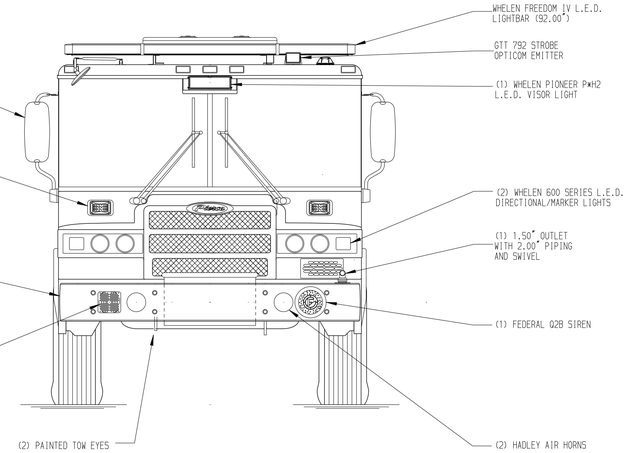

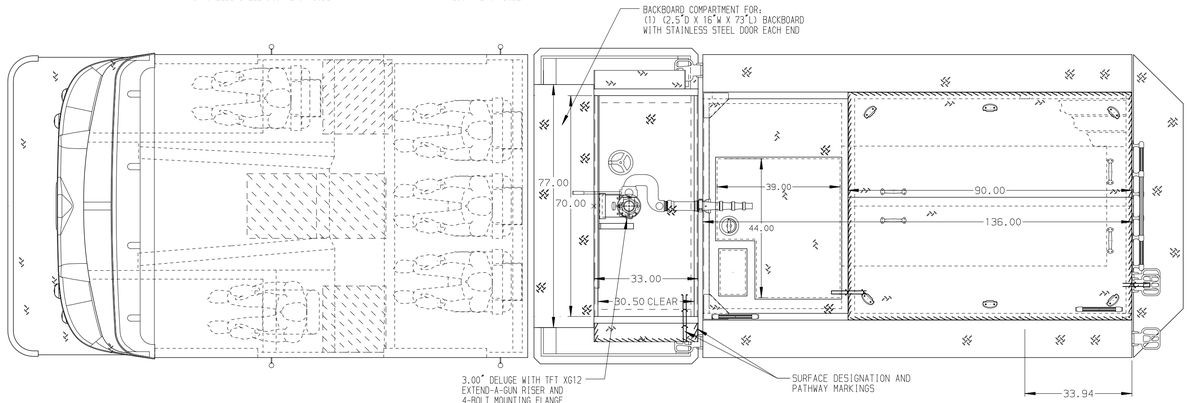

HOSEBED CAPACITIES

1. 200' OF 1.75" D.J.POLY HOSE
2. 450' OF 2.50" D.J.POLY HOSE
3. 200' OF 2.50" D.J.POLY HOSE
   250' OF 1.75" D.J.POLY HOSE ON TOP
   1000' OF 5.00" D.J.POLY HOSE
4. 500' OF 3.00" D.J.POLY HOSE
5. 200' OF 1.75" D.J.POLY HOSE

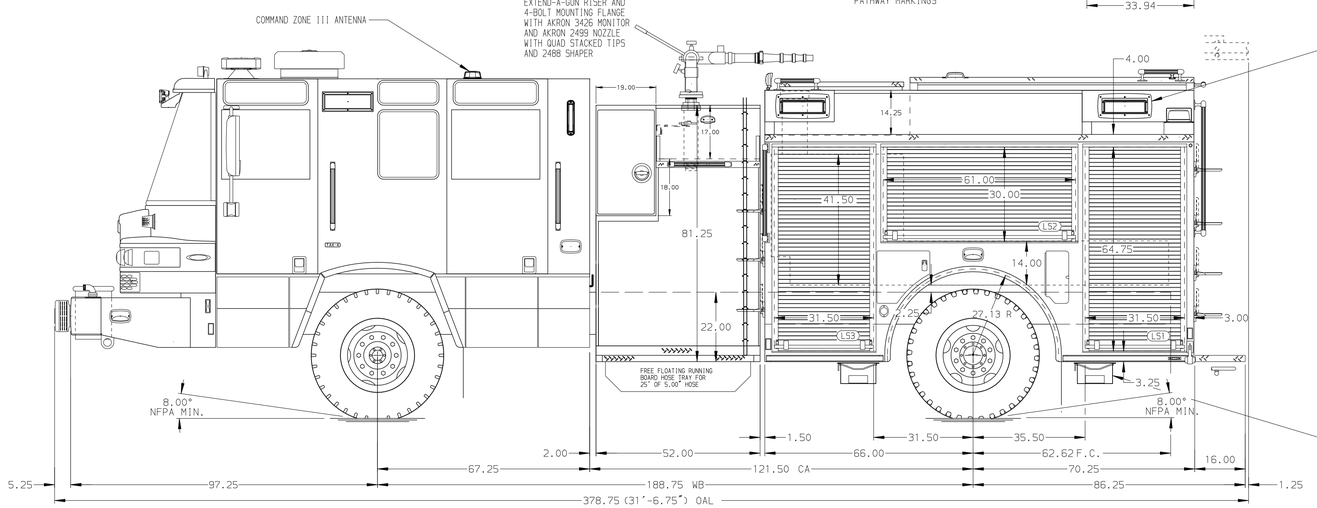

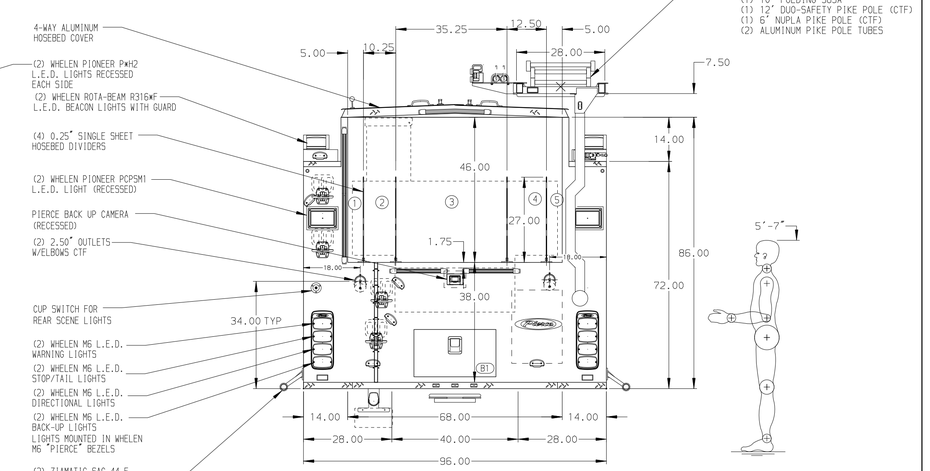

ALUMINUM BODY

MAXIMUM O.A.H 126.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET W/DISCONNECT COUPLING LOCATED ON D.S. SEAT RISER
2. AIR OUTLET WITH TWO SHUT OFF VALVES LOCATED ON D.S. PUMP PANEL
3. 30A COOPER WIRING DEVICES SHORELINE RECEPTACLE LOCATED ON D.S. SEAT RISER
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. S/STL SCUFFPLATES AT CAB DOOR JAMBS

REV	DATE	BY	CH
V	26MAR21	LME	BSE
V	12FEB21	LME	BSE
V	18DEC20	LME	BSE

CHASSIS DATA
MAKE: PIERCE
MODEL: QUANTUM

Pierce MANUFACTURING INC.

TITLE: 1500-D-500P, 136"BODY, FULL HEIGHT D.S. & P.S. DELUGE, HYDRAULIC LADDER RACK
FOR: TUALATIN VALLEY FIRE & RESCUE
TIGARD, OREGON

DWG NO. 35733AD-SH1

JOB NO.	35733 01-02
SCALE	1:24
DATE	
DRAWN BY	LME 11DEC20
CHECKED BY	BSE 14DEC20
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 19-MAY-2021 09:08:02