


BODY 100' Ascendant Aerial Tower No Pump Alum Body COMPT, LEFT SIDE Full Height RollUp/Lap Doors COMPT, RIGHT SIDE Full Height RollUp/Lap Doors	WATER TANK Water Tank Not Required Foam System Foam System Not Required Foam Cell Foam Cell Not Required
---	--

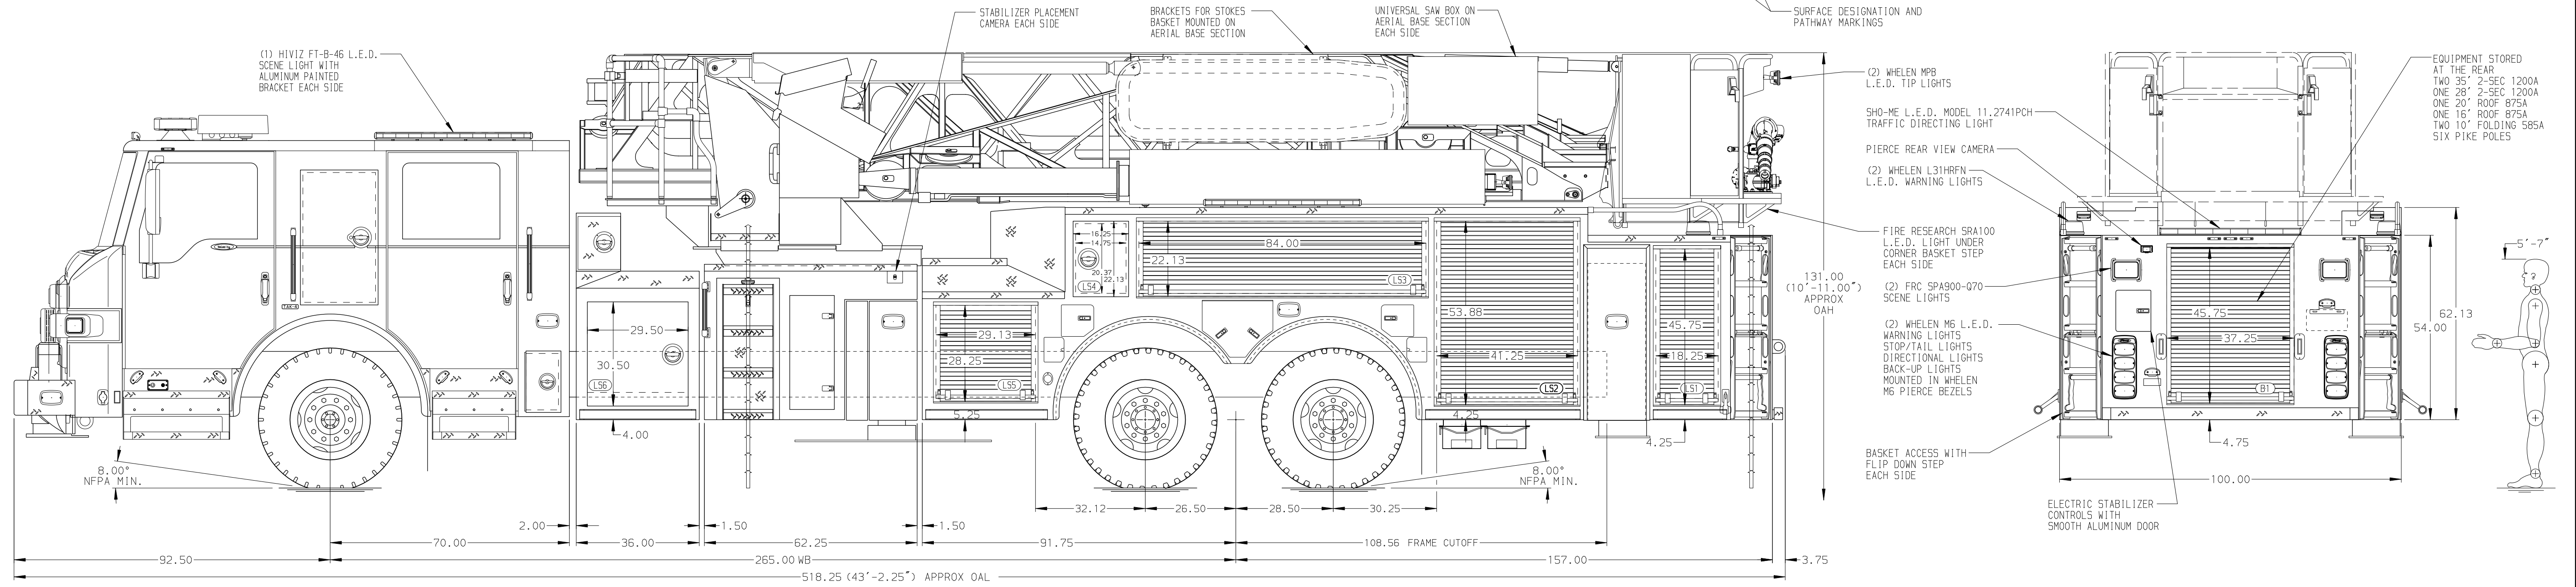

CHASSIS Velocity Chassis (Big Block) ENGINE 605 HP Cummins X15 Engine	CAB 7000 Velocity FR Cab BUMPER 15" Extended Painted Aluminum	AXLE, FRONT, CUSTOM 24,000 Lb TAK-4 Axle AXLE, REAR 52,000 Lb Meritor Axle	TRANSMISSION Allison 5th Gen, 4000 EV5 P	PUMPHOUSE 36" Compartment, No Pump, Lap Door PUMP No Pump Required	CROSSLAYS, 1.50" 1.50" Crosslays Not Required CROSSLAYS, 2.50" 2.50" Crosslays Not Required	SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required	SAFETY Side Roll and Frontal Impact Protection	CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____		JOB NO. 35760 SCALE 1:24 DATE _____ DRAWN BY TKA 190CT20 CHECKED BY THS 190CT20 SHEET SIZE D SHEET NO. 1 OF 1
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.										
1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE FRONT CAB CORNER 2. AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPED WELL 3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT 4. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET 5. EIGHT ADJUSTABLE SHELVES LOCATED IN COMPARTMENTS PER SHOP ORDER 6. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED IN COMPARTMENTS PER SHOP ORDER 7. DC POWER TO AERIAL TIP 8. NON-RAISED AERIAL PEDESTAL 9. 3-in-1 LYFECOMBO BRACKETS AT AERIAL BASKET										
CHASSIS DATA MAKE PIERCE MODEL DWG NO. 35760AD										