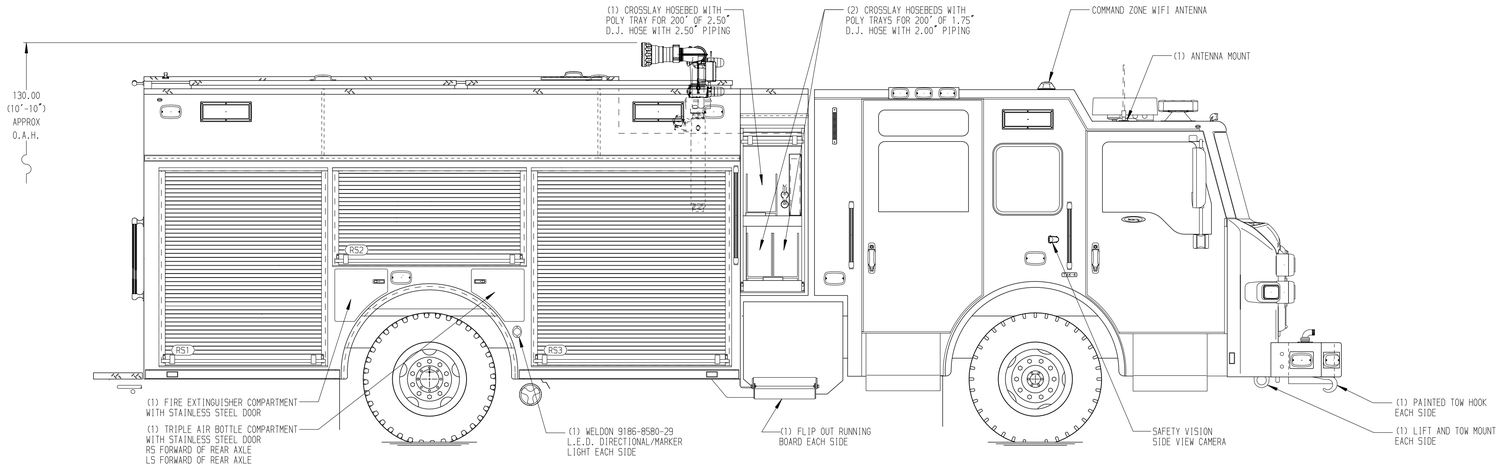

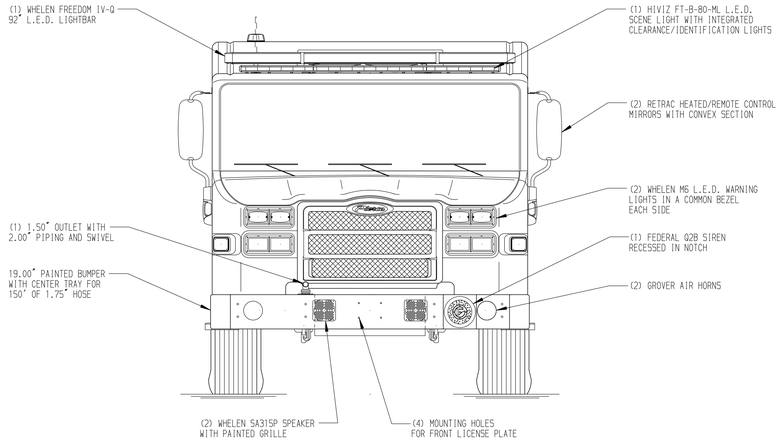

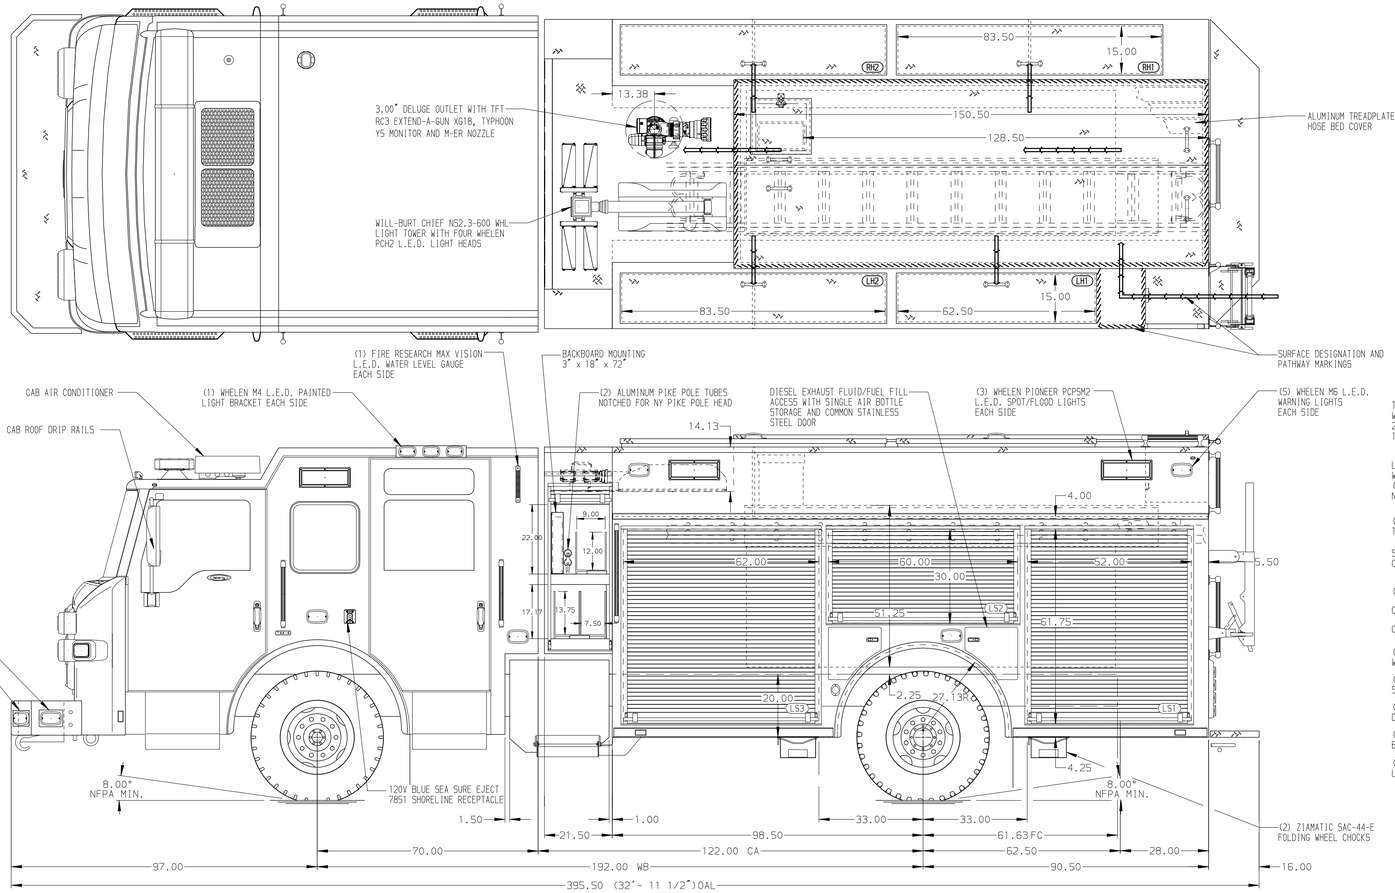

HOSEBED CAPACITIES

1. 1000' OF 5.00" KEY PRO FLOW HOSE
2. 400' OF 3.00" KEY BIG-10 HOSE
3. 300' OF 2.50" KEY BIG-10 HOSE

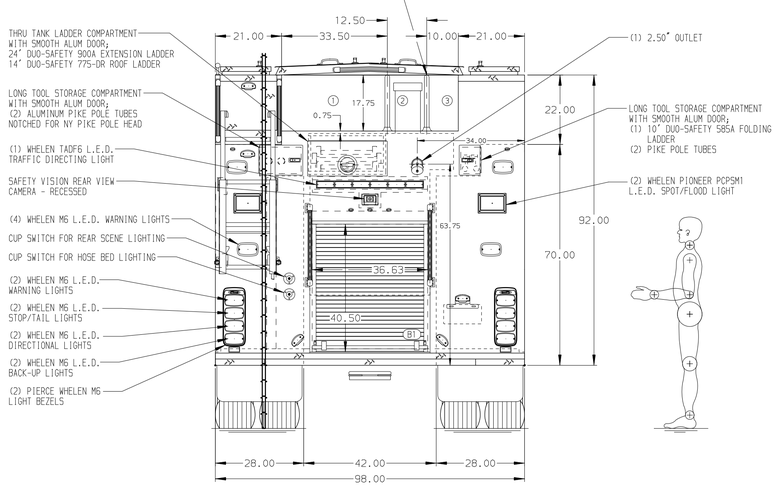

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING LOCATED ON LS PUMP PANEL
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. ELASTIC PULL STRAP ON ROLLUP DOOR IN CROSSLAY COMPARTMENT
5. TASK FORCE TIPS BLITZFIRE BRACKET - CUSTOMER FURNISHED - LOCATION TBD

REV	DATE	BY	CH
4	04JUN21	JRO	NPE
3	21MAY21	JRO	NPE
2	02APR21	JRO	NPE
1	15JAN21	JRC	NPE

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-750, 750G WATER, 189" RESCUE PUC (3)CROSSLAYS, HORIZONTAL THRU TUNNEL LADDER STORAGE
FOR: HUMBLE FIRE RESCUE, HUMBLE, TEXAS
DWG NO.: 35765AD-SH1

JOB NO.	35765
SCALE	1:24
DATE	
DRAWN BY	JRC 05JAN21
CHECKED BY	NPE 05JAN21
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 04-JUN-2021 15:10:08