

PUMPER BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb Oshkosh Tak-4 Axle

AXLE, REAR

27,000 Lb Meritor Axle

ENGINE

455 HP Cummins X12 Engine

TRANSMISSION

Allison 5th Gen, 4500 EVS P

BUMPER

22" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY WATER TANK

1000 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

25.50" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

171" RollUp Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE

171" RollUp Full Height & Depth Front & Rear

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

(1) 2.50" Standard Capacity

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

Foam System

Husky 3 Single Agent Foam System

Foam Cell

20 Gallon Foam Cell, Not Reduced Water


22" PIERCE EXTENSION

Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED ON TOP OF BUMPER RIGHT SIDE
- SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED PASSENGER SIDE REAR BODY BULKHEAD
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER SHOP ORDER
- ONSPOT AUTOMATIC TIRE CHAINS

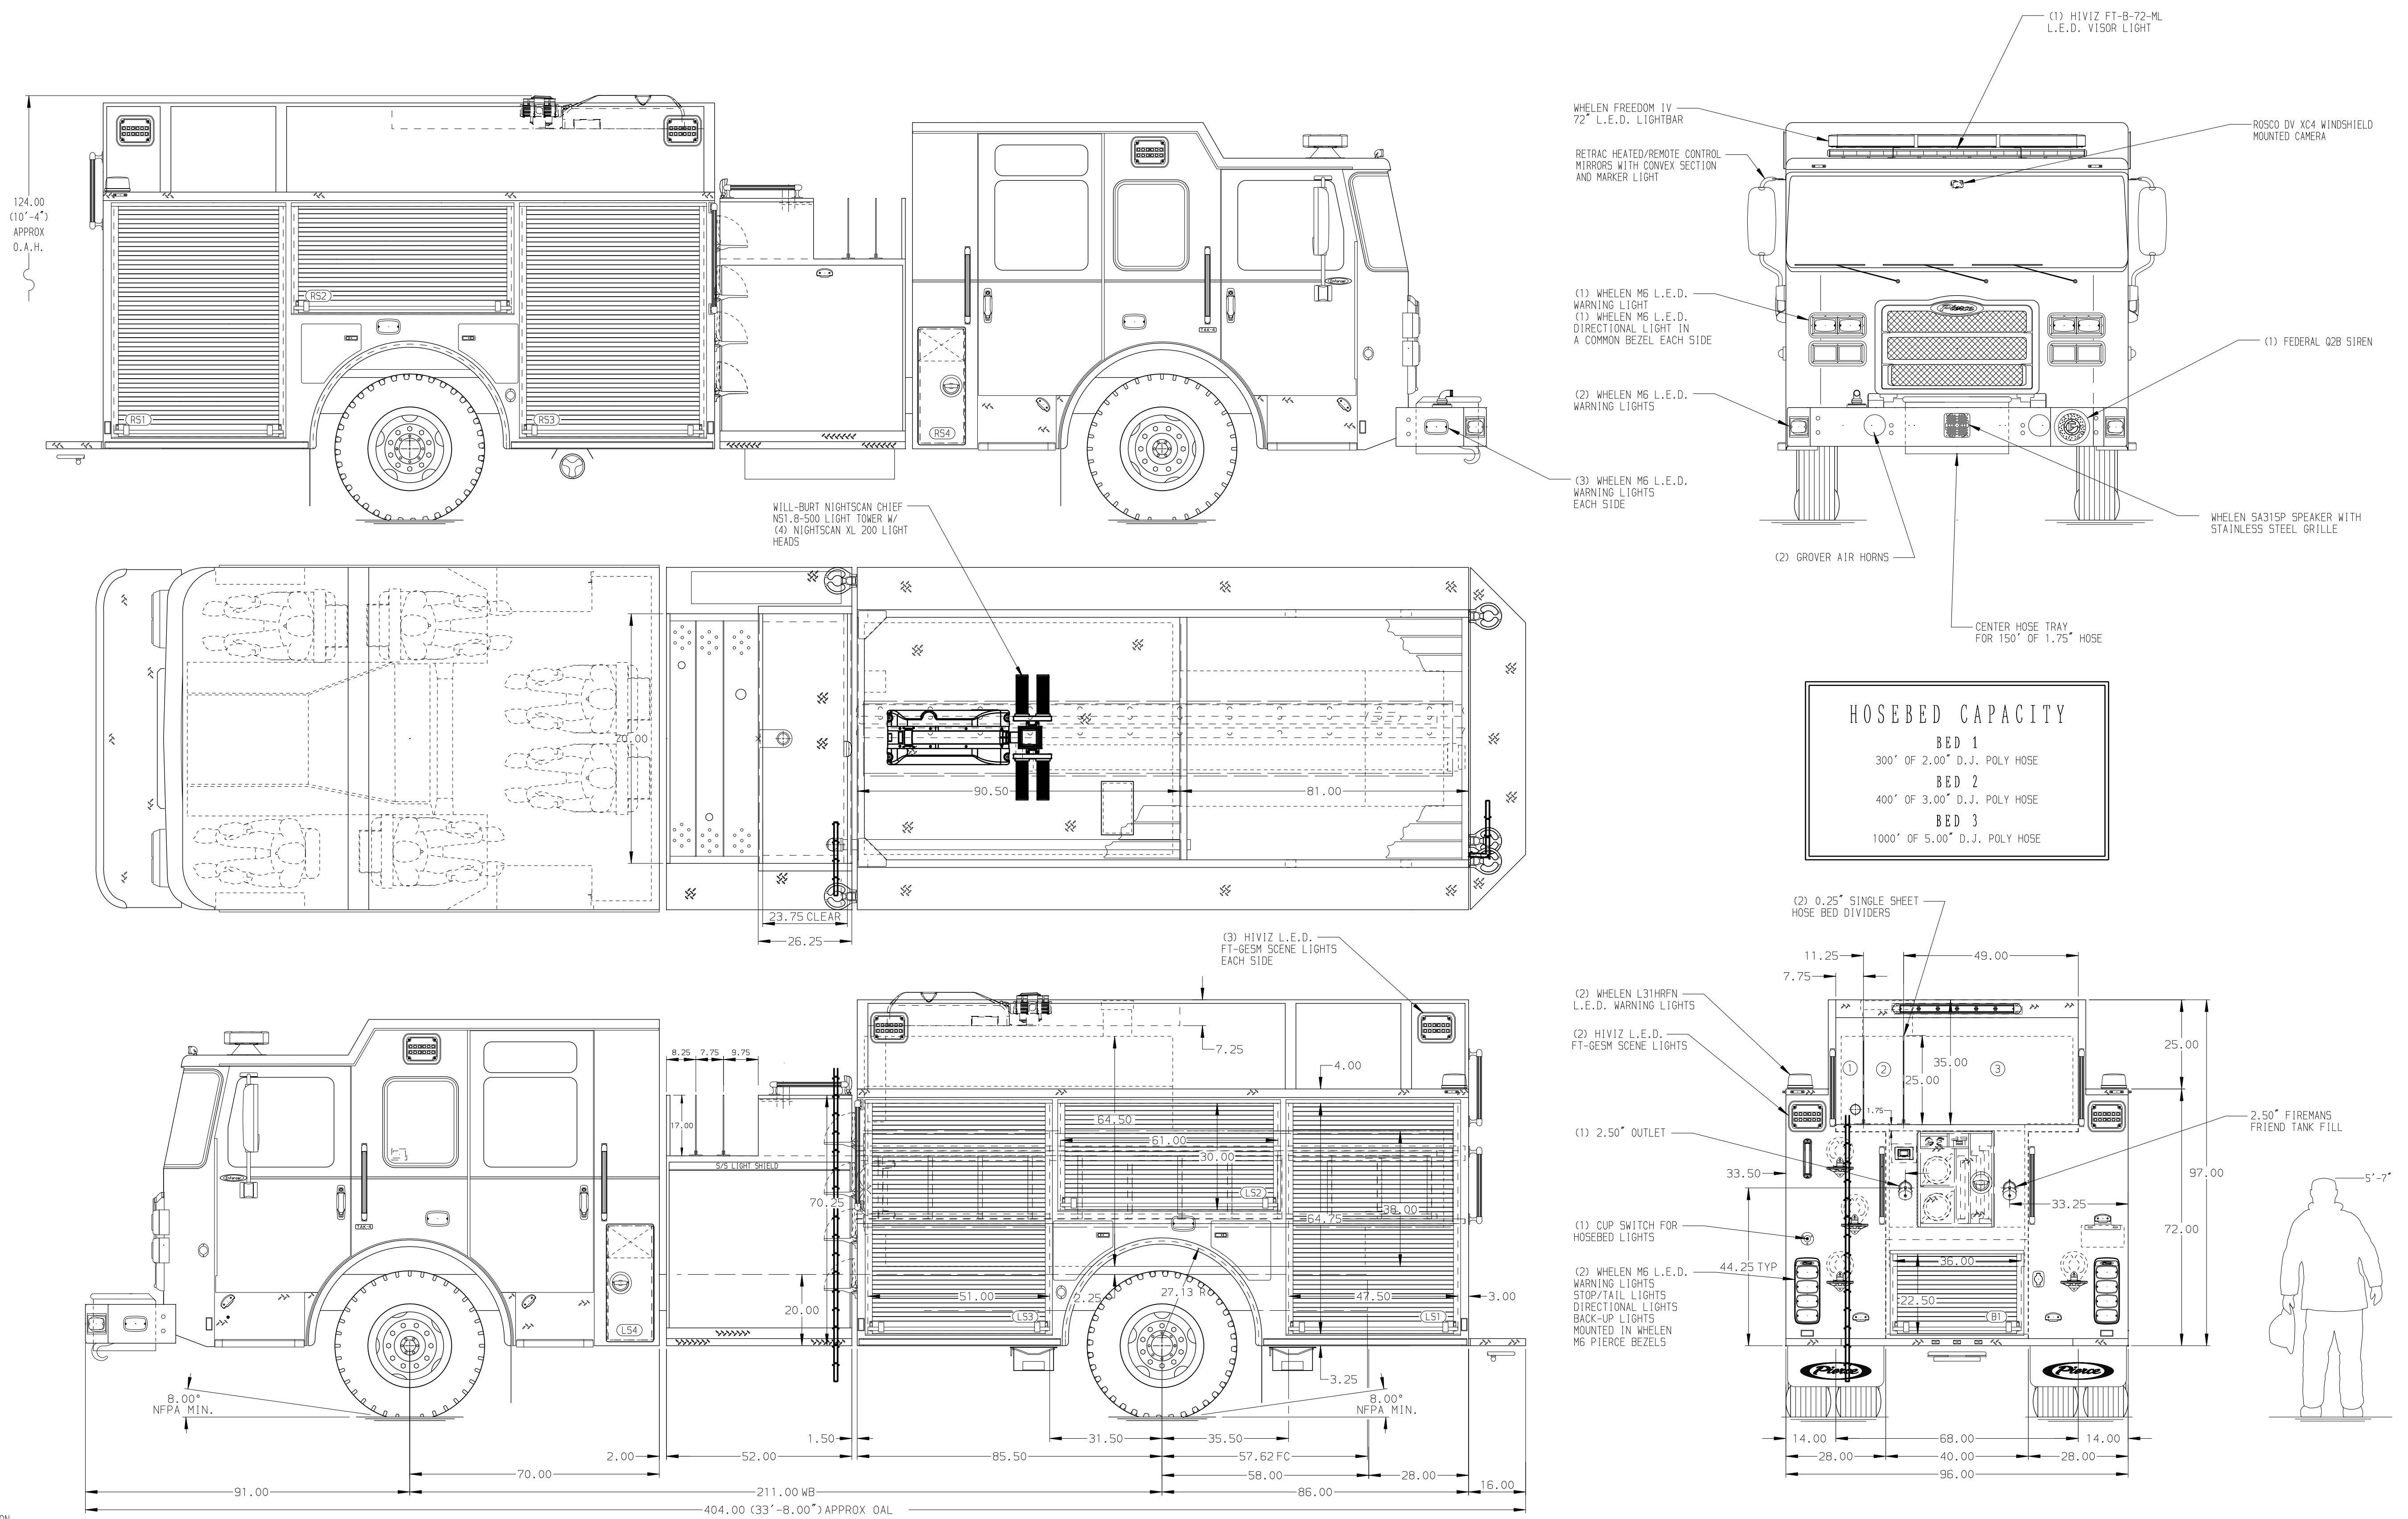

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



JOB NO. 36075

SCALE 1:24 DATE _____

REV	DATE	BY	CH	ENFORCER
23JUN21	COL	THS	MAKE	
21APR21	MMF	THS	PIERCE	
02MAR21	MMF	THS	MODEL	

TITLE Pierce Pumper Approval Drawing
FOR Mastersonville Fire Company
DWG NO. 36075AD

DRAWN BY COL 25JAN21
CHECKED BY MMF 04FEB21
SHEET SIZE D SHEET NO. 1 OF 1