

**PUMPER BODY**  
 Medium Aluminum 2nd Gen Pumper  
**CHASSIS**  
 Arrow XT Chassis


**CHASSIS AXLE, FRONT, CUSTOM**  
 19,500 Lb Dana Axle  
**AXLE, REAR**  
 24,000 Lb Meritor Axle  
**ENGINE**  
 500 HP Cummins X12 Engine  
**TRANSMISSION**  
 Allison 5th Gen, 4500 EVS P  
**BUMPER**  
 Non-Extended Stainless Steel, Special Length  
**CAB**  
 6710 Arrow XT Cab

**BODY WATER TANK**  
 500 Gallon Poly Water Tank  
**COMPT, PUMPER, REAR**  
 30.75" FF RollUp Rear Compt  
**COMPT, PUMPER, DRIVER SIDE**  
 152" RollUp Full Height Front & Rear FDLR  
**COMPT, PUMPER PASS. SIDE**  
 152" RollUp Full Height Front & Rear FDLR

**FIRE SUPPRESSION PUMPHOUSE**  
 45" Side Mount  
**PUMP**  
 1500 GPM Waterous CSU  
**CROSSLAYS, 1.50"**  
 (2) 1.50" Special Capacity  
**CROSSLAYS, 2.50"**  
 2.50" Crosslays Not Required  
**SPEEDLAYS**  
 Speedlays Not Required  
**GENERATOR**  
 Generator Not Required  
**Foam System**  
 Husky 3 Single Agent Foam System  
**Foam Cell**  
 25 Gallon Foam Cell, Not Reduced Water

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
- FOURTEEN FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN COMPARTMENT PER SHOP ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER SHOP ORDER
- AIR OUTLET "MILTON FITTING" WITH SHUT OFF VALVE LOCATED ON DS PUMP PANEL

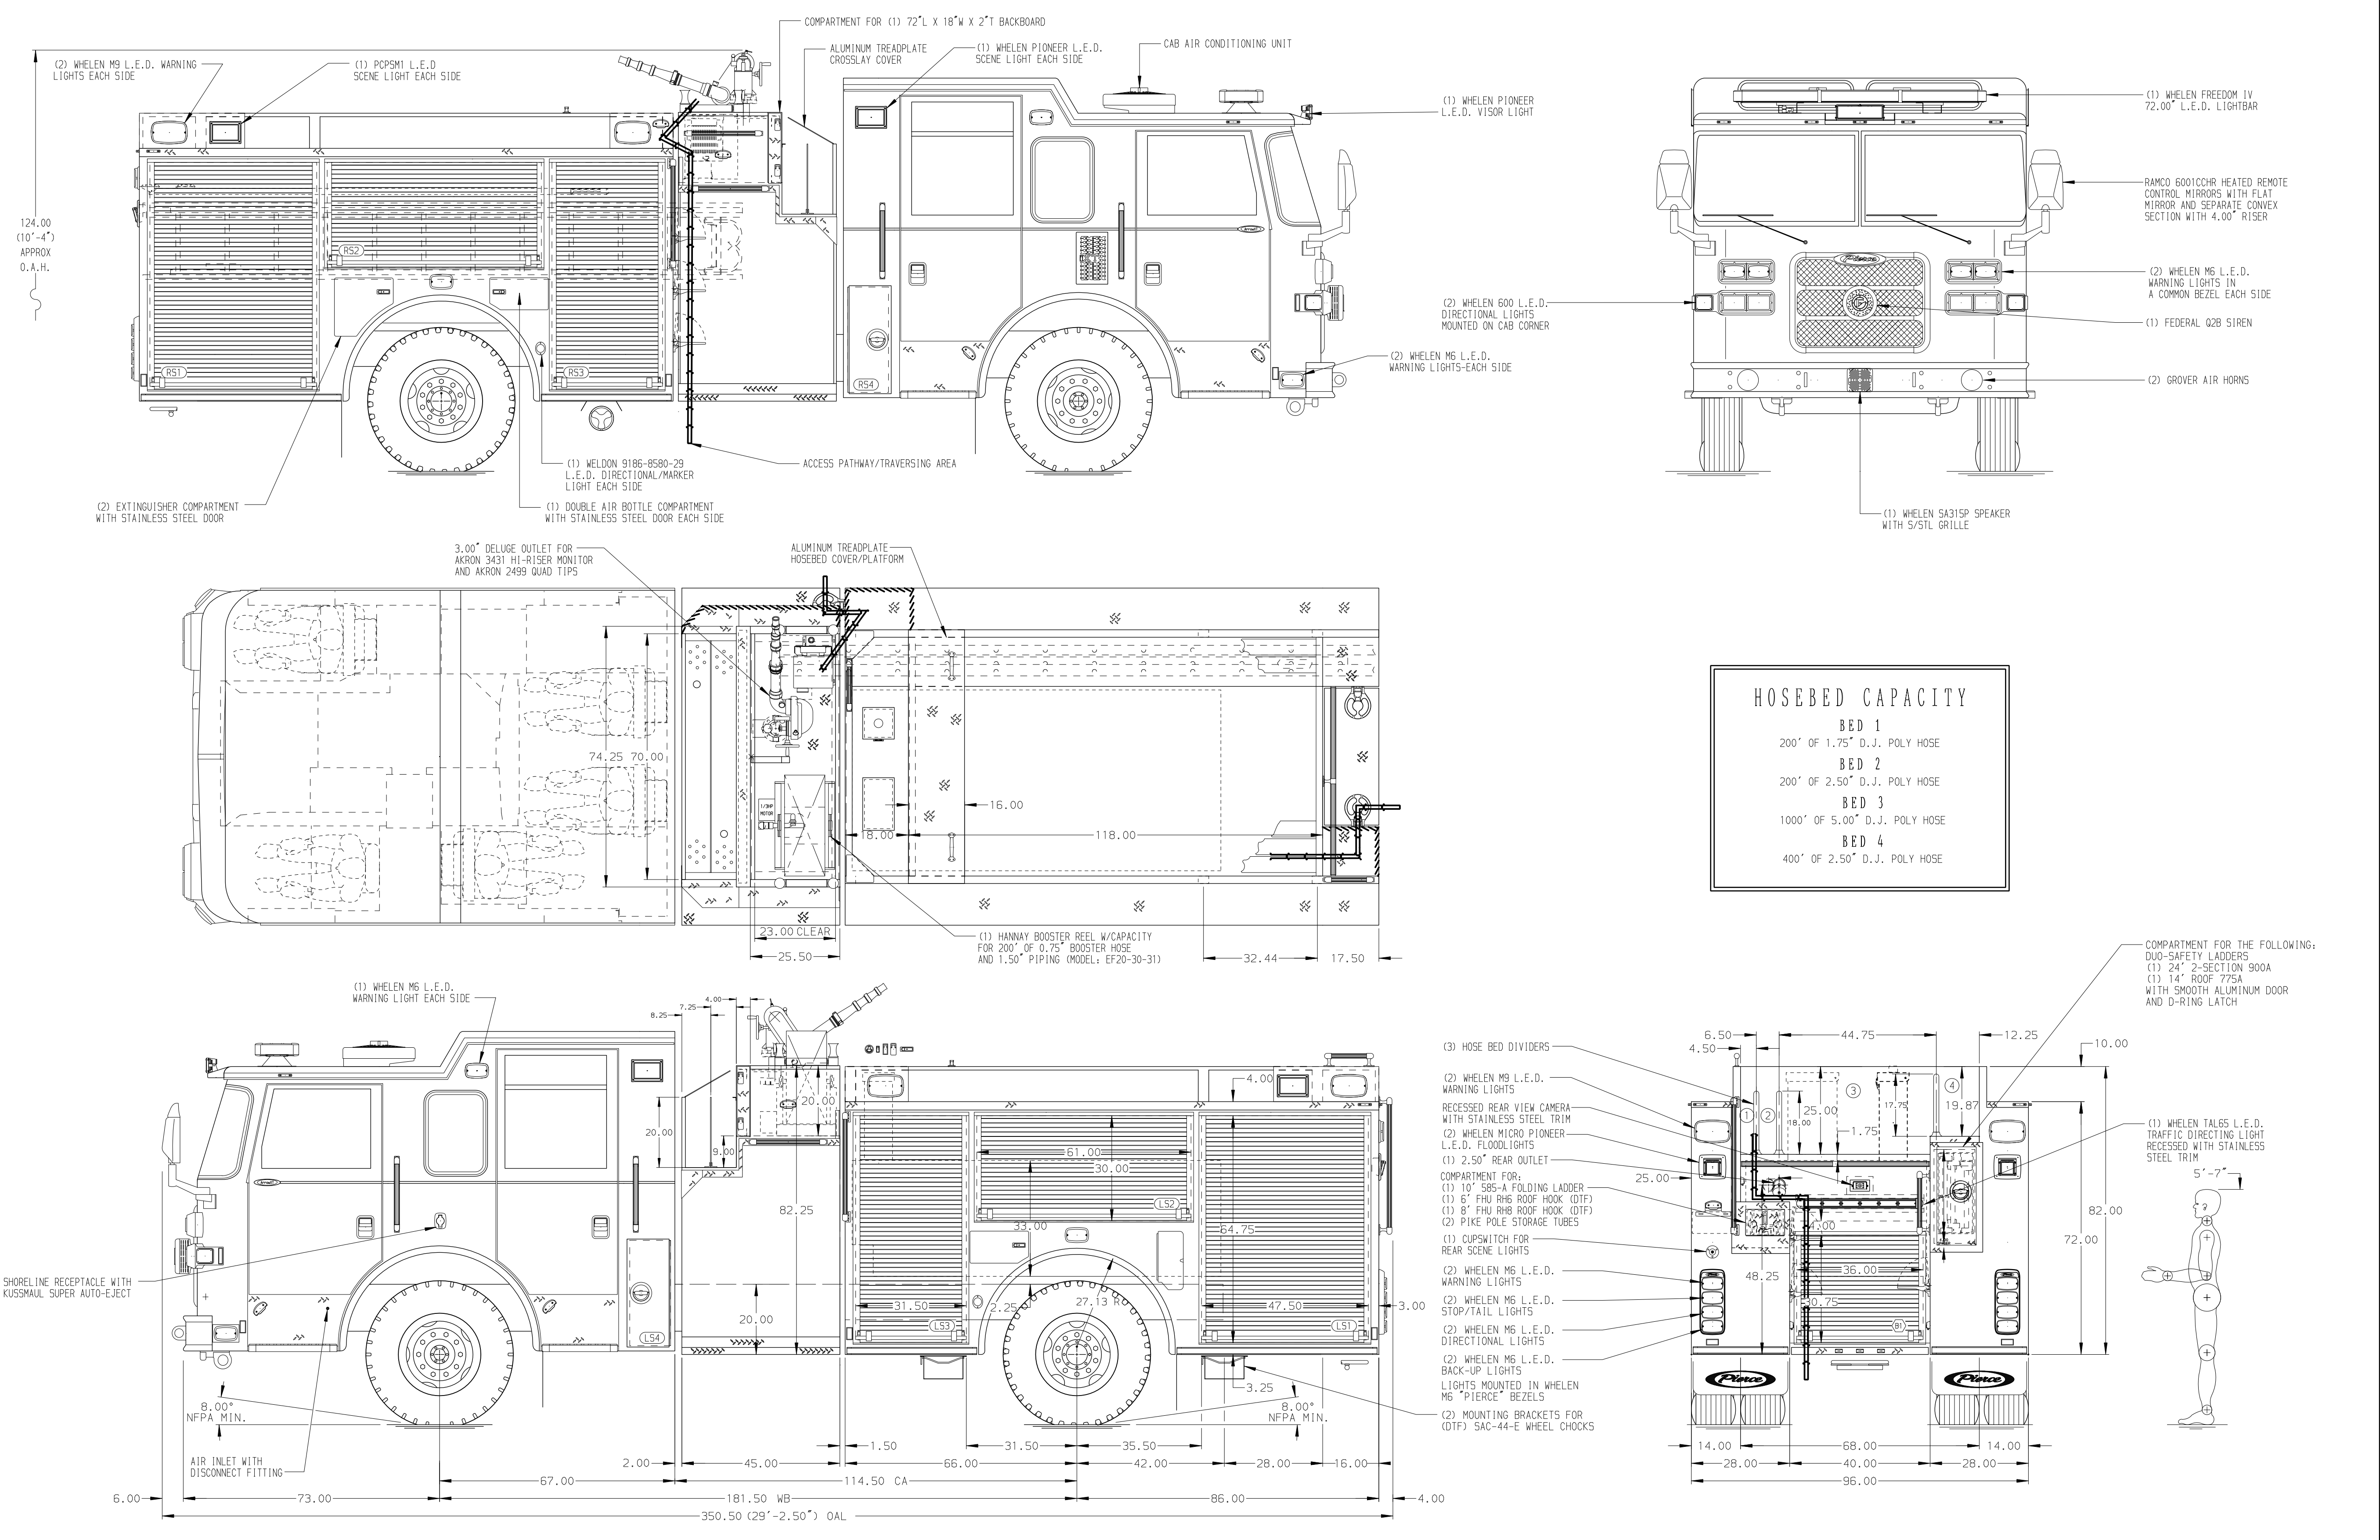

HOSEBED CAPACITY	
BED 1	200' OF 1.75" D.J. POLY HOSE
BED 2	200' OF 2.50" D.J. POLY HOSE
BED 3	1000' OF 5.00" D.J. POLY HOSE
BED 4	400' OF 2.50" D.J. POLY HOSE

		JOB NO.	36191
		SCALE	1:24
TITLE Pierce Pumper Approval Drawing		DRAWN BY	MMF
		CHECKED BY	COL
FOR Tuscaloosa Fire Rescue Service		SHEET SIZE	D
		SHEET NO.	1 OF 1
DATE	22JUL21	DWG NO.	36191AD
BY	MMF		
CH	CSH		
REV	16JUN21		
	MMF		
	CSH		
	PIERCE		
	MODEL		
	ARROW XT		