

PUMPER
BODY

Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS
AXLE, FRONT, CUSTOM

20,000 Lb Meritor Axle

AXLE, REAR

27,000 Lb Meritor Axle

ENGINE

470 HP DD13 Engine

TRANSMISSION

Allison 5th Gen, 4000 EVS P

BUMPER

19" Extended Stainless Steel

CAB

7010 Enforcer Cab

BODY
WATER TANK

7500 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF Lap Rear Compt

COMPT, PUMPER, LEFT SIDE

161" Lap Full Height & Depth Front, FH Rear FDLER

COMPT, PUMPER, RIGHT SIDE

161" Lap Low FDLER

FIRE SUPPRESSION
PUMPHOUSE

45" Control Zone Side Mount

PUMP

2000 GPM Hale QMAX-200

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

Foam System


Foam System Not Required

Foam Cell

Foam Cell Not Required

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

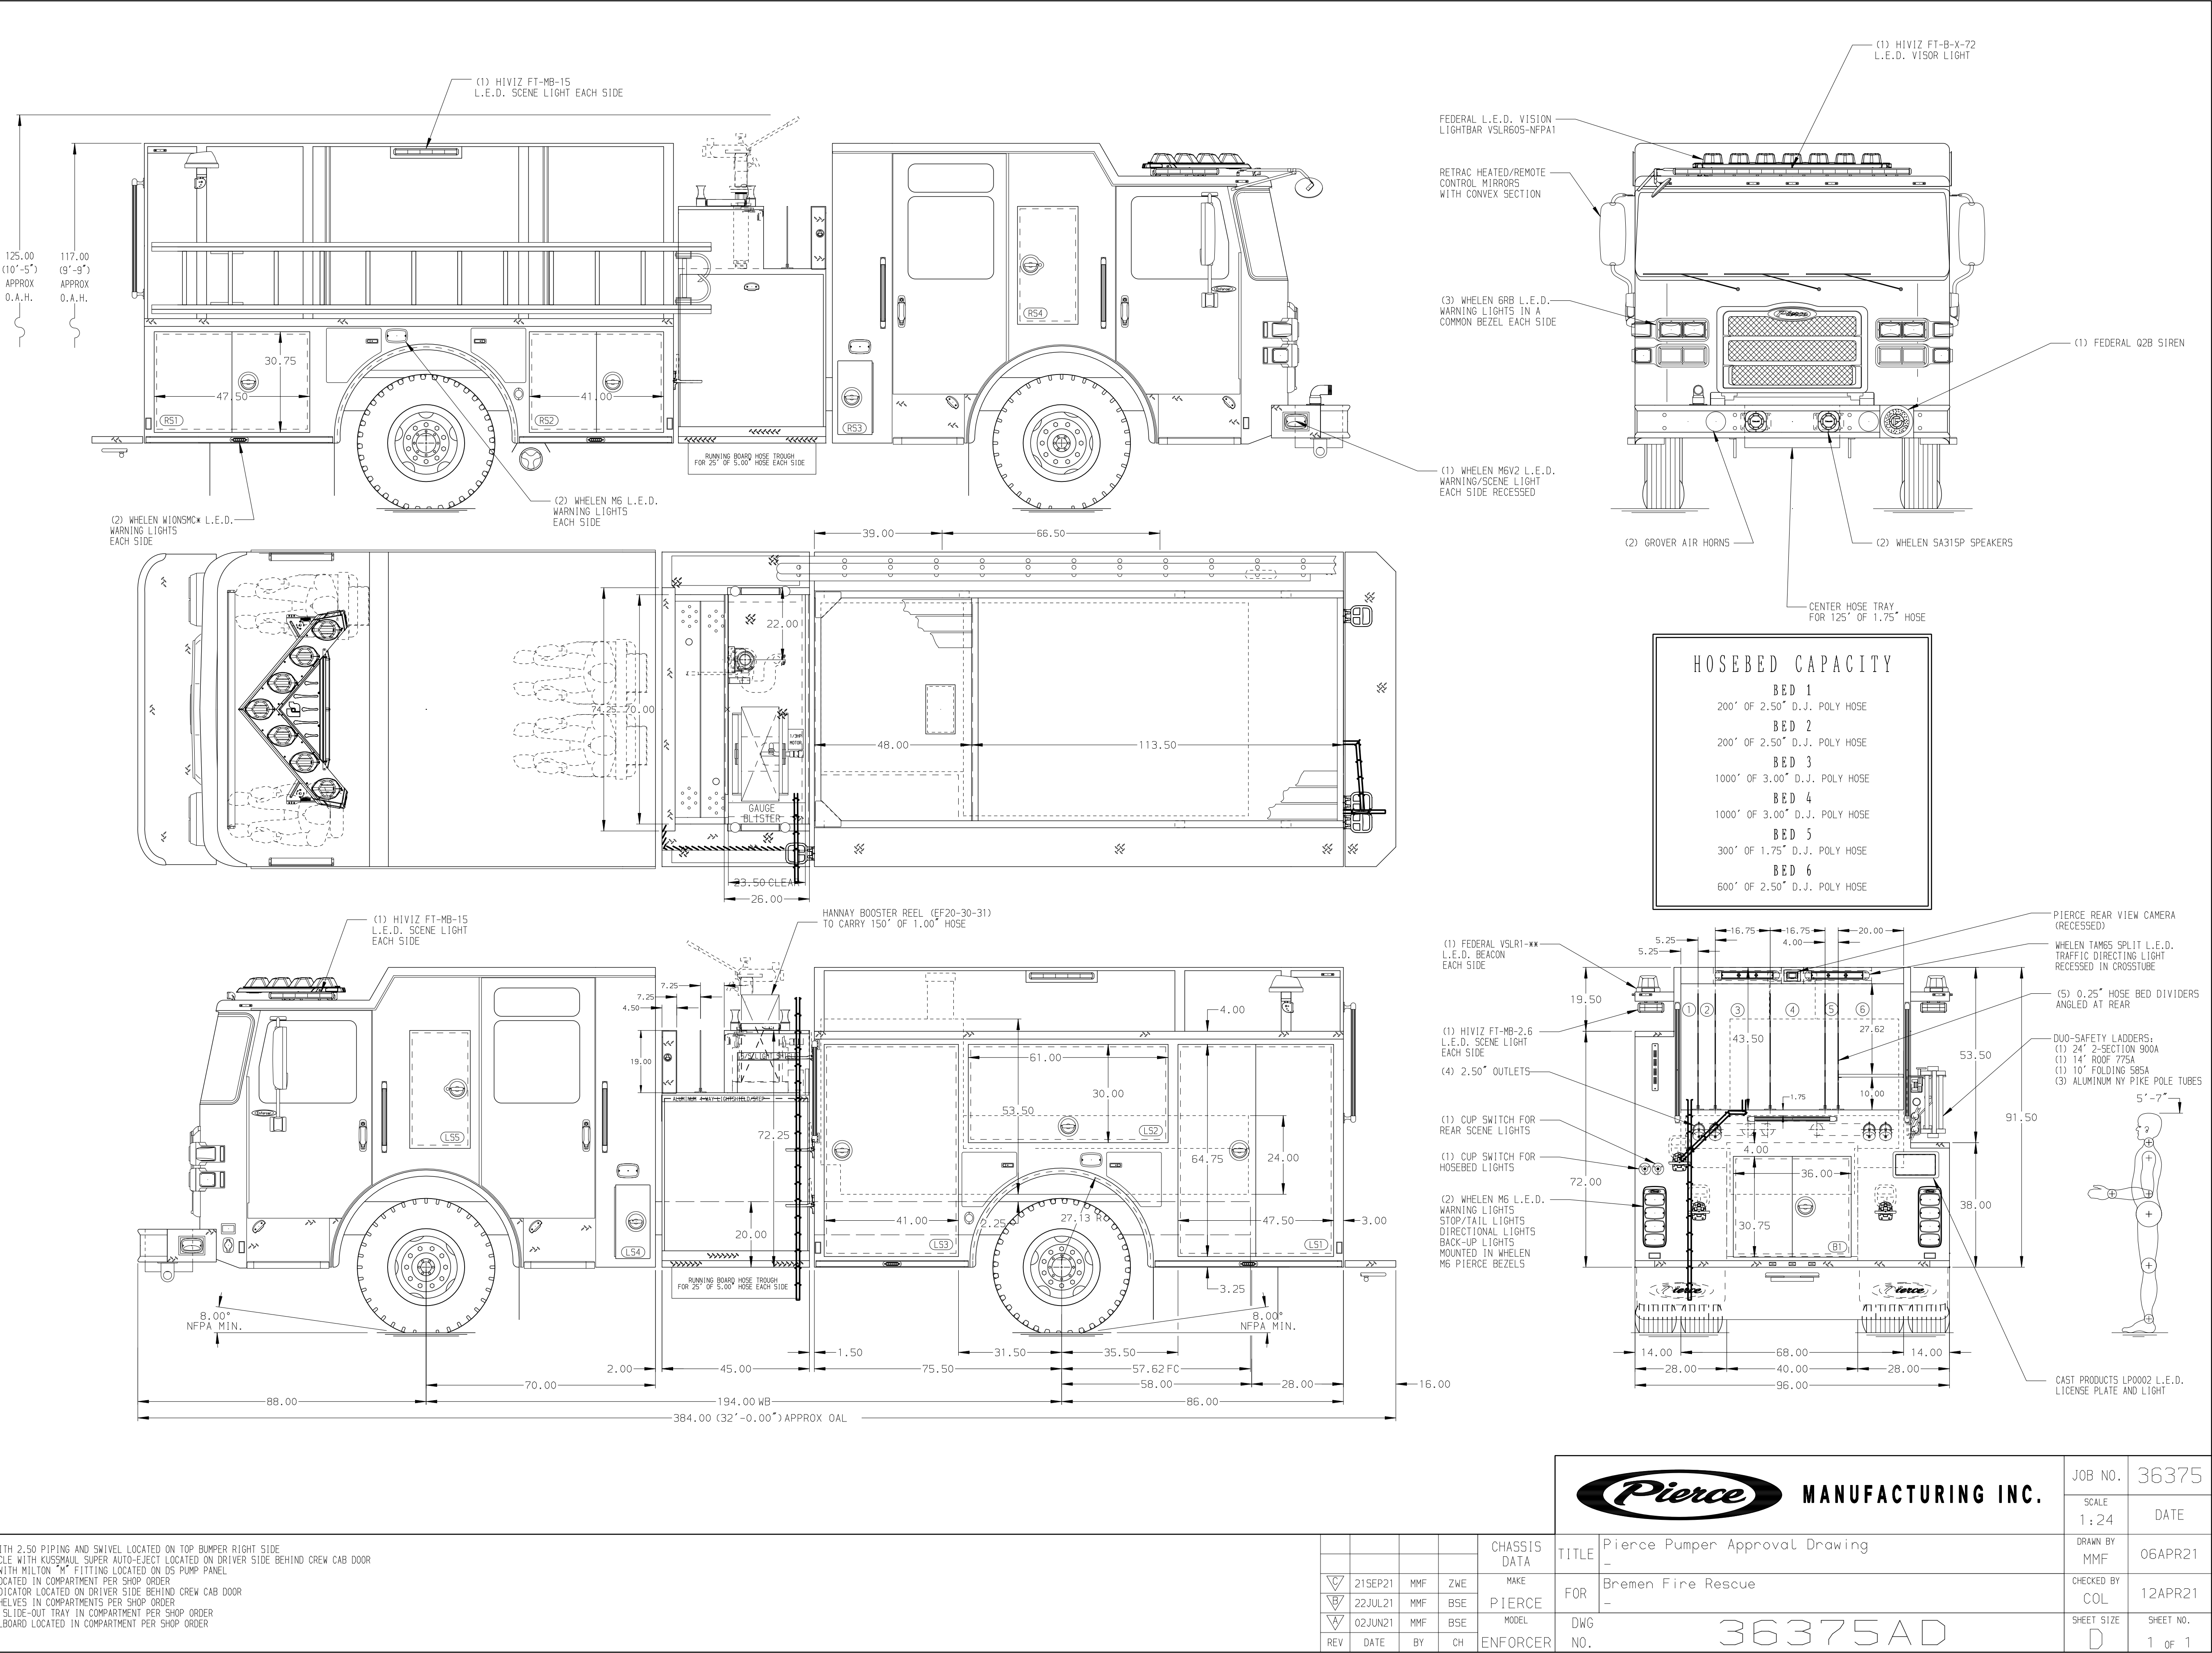

 MANUFACTURING INC.		JOB NO.	36375
		SCALE	1:24
		DATE	
		DRAWN BY	MMF
		06APR21	
		CHECKED BY	COL
		12APR21	
		SHEET SIZE	D
		SHEET NO.	1 OF 1

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
				MAKE	FOR	Bremen Fire Rescue
				PIERCE		
				MODEL	DWG NO.	36375AD
				ENFORCER		
REV	DATE	BY	CH			

1.	ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT SIDE
2.	SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE BEHIND CREW CAB DOOR
3.	AIR INLET/OUTLET WITH MILTON "M" FITTING LOCATED ON DS PUMP PANEL
4.	BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5.	BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE BEHIND CREW CAB DOOR
6.	FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7.	ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8.	ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT PER SHOP ORDER