

**PUMPER  
BODY**

Long Aluminum 2nd Gen Pumper

**CHASSIS**  
Enforcer Chassis

**CHASSIS  
AXLE, FRONT, CUSTOM**

19,500 Lb Oshkosh Tak-4 Axle

**AXLE, REAR**

27,000 Lb Meritor Axle

**ENGINE**

455 HP Cummins X12 Engine

**TRANSMISSION**

Allison 5th Gen, 4500 EVS P

**BUMPER**

19" Extended Stainless Steel

**CAB**

7010 Enforcer Cab

**BODY  
WATER TANK**

1000 Gallon New York Style Water Tank

**COMPT, PUMPER, REAR**

22.50" FF RollUp Rear Compt

**COMPT, PUMPER, LEFT SIDE**

171" RollUp Full Height & Depth Front & Rear

**COMPT, PUMPER, RIGHT SIDE**

171" RollUp Full Height & Depth Front & Rear

**FIRE SUPPRESSION  
PUMPHOUSE**

45" Control Zone Side Mount

**PUMP**

1500 GPM Waterous CSU

**CROSSLAYS, 1.50"**

(2) 1.50" Standard Capacity

**CROSSLAYS, 2.50"**

(1) 2.50" Standard Capacity

**SPEEDLAYS**

Speedlays Not Required

**GENERATOR**

Generator Not Required

**Foam System**

Husky 3 Single Agent Foam System


**Foam Cell**

20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY OF THE CAB
- SHOULDER RECEPTACLE WITH KUSSMAUL SUPER-AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER SHOP ORDER

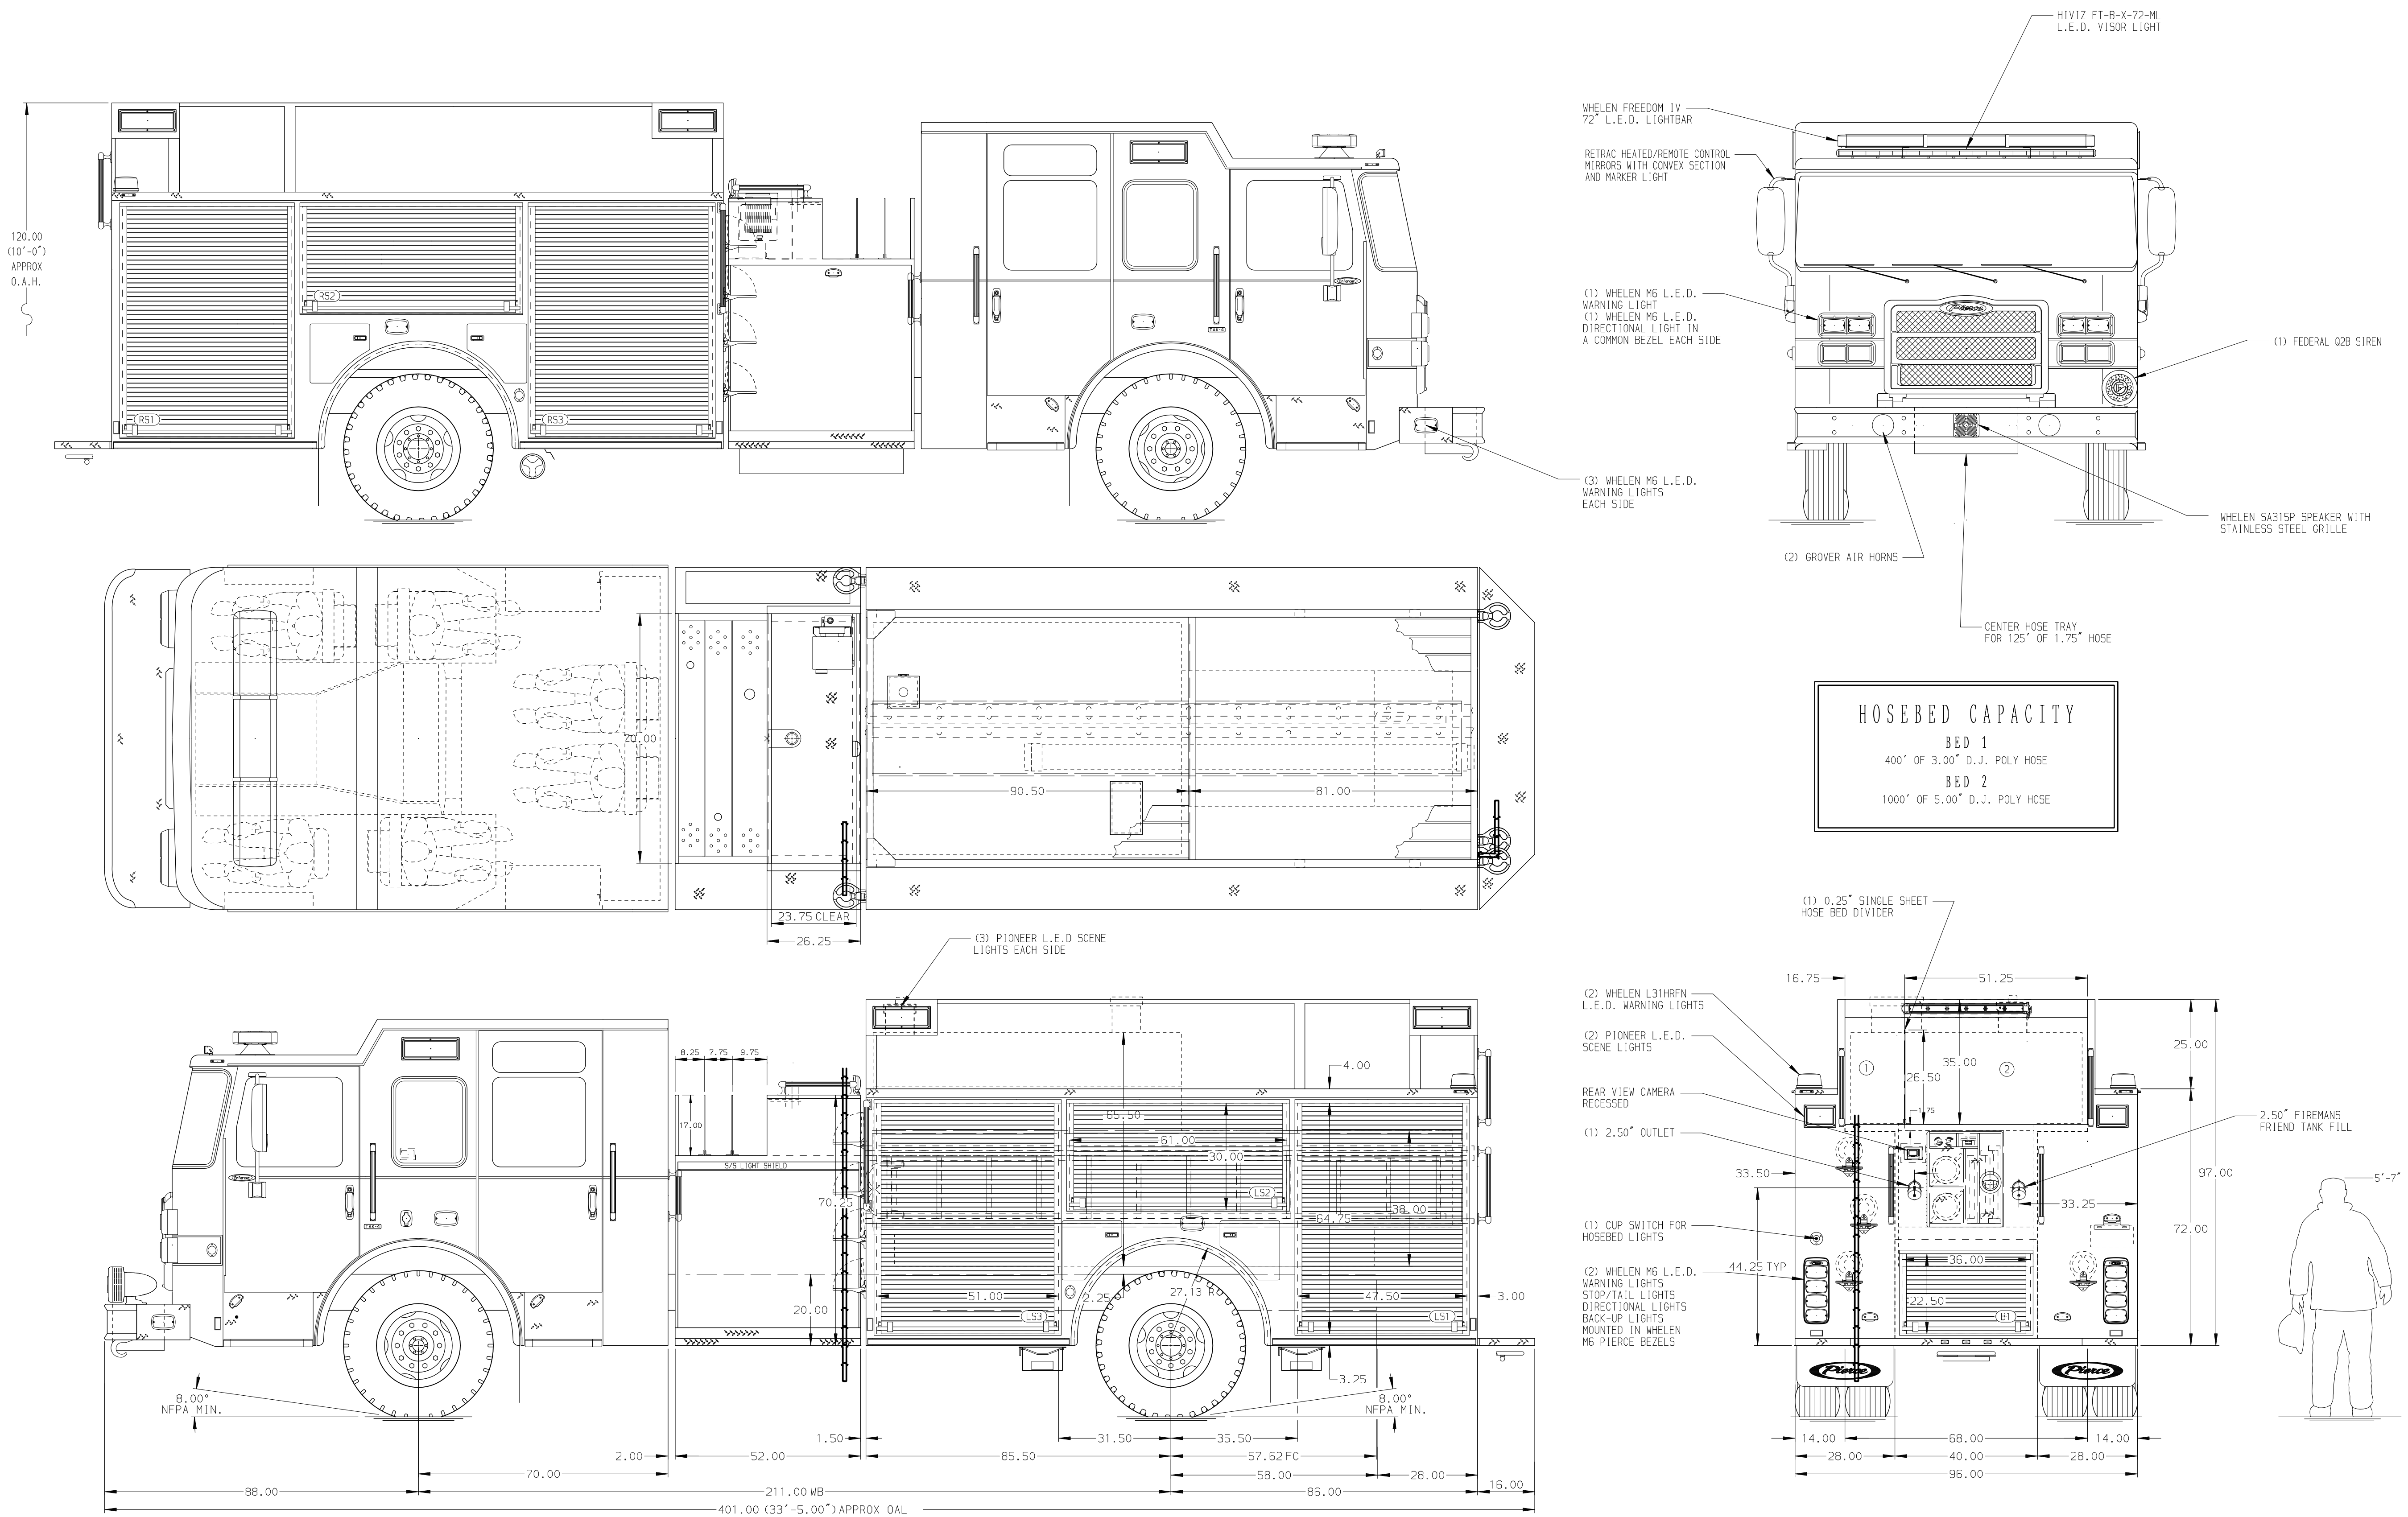

**CUSTOMER APPROVAL**

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_



JOB NO. 36952

SCALE 1:24 DATE

DRAWN BY MMF 25MAY21

CHECKED BY THS 29JUN21

SHEET SIZE SHEET NO.

D 1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Pierce Field Unit Appleton, Wisconsin
PIERCE	DWG NO.	36952AD
MODEL		
ENFORCER		

36952AD