

YOUR WORKING AT HEIGHT PARTNER

Specifications

Model	Z-62/40																											
Measurements	Metric	US																										
Working height maximum*	20.87 m	67 ft 11 in																										
Platform height maximum	18.87 m	61 ft 11 in																										
Horizontal reach maximum	12.47 m	40 ft 11 in																										
Up and over clearance maximum	8.13 m	▲ Platform length - 8 ft / 6 ft model	0.91 m / 0.76 m	3 ft / 2 ft 6 in	▲ Platform width - 8 ft / 6 ft model	2.44 m / 1.83 m	8 ft / 6 ft	▲ Height - stowed	2.56 m	8 ft 6 in	Height - transport (jib tucked under)	2.90 m	9 ft 6 in	▲ Length - stowed	9.25 m	30 ft 4 in	Length - transport (jib tucked under)	7.58 m	24 ft 10.5 in	▲ Width	2.49 m	8 ft 2 in	▲ Wheelbase	2.51 m	8 ft 3 in	▲ Ground clearance - center	0.37 m	1 ft 2.5 in
▲ Platform length - 8 ft / 6 ft model	0.91 m / 0.76 m	3 ft / 2 ft 6 in																										
▲ Platform width - 8 ft / 6 ft model	2.44 m / 1.83 m	8 ft / 6 ft																										
▲ Height - stowed	2.56 m	8 ft 6 in																										
Height - transport (jib tucked under)	2.90 m	9 ft 6 in																										
▲ Length - stowed	9.25 m	30 ft 4 in																										
Length - transport (jib tucked under)	7.58 m	24 ft 10.5 in																										
▲ Width	2.49 m	8 ft 2 in																										
▲ Wheelbase	2.51 m	8 ft 3 in																										
▲ Ground clearance - center	0.37 m	1 ft 2.5 in																										

Productivity

Lift capacity	227 kg	500 lbs
Platform rotation	160°	160°
Vertical jib rotation	135°	135°
Turntable rotation	360° continuous	
Turntable tailswing	zero	zero
Drive speed - stowed	4.8 km/h	3.0 mph
Drive speed - raised**	1.1 km/h	0.68 mph
Gradeability - 2WD - stowed***	25%	25%
Gradeability - 4WD - stowed***	45%	45%
Turning radius - inside	2.36 m	7 ft 9 in
Turning radius - outside	5.54 m	18 ft 2 in
Controls	12V DC proportional	
Tyres	355/55D 625	

Power

Power source	Deutz D2011L03i 3-cylinder diesel 35.8 kW (48 hp) Perkins 404D-22 4-cylinder diesel 38.0 kW (51 hp)	
Auxiliary power unit	12V DC	12V DC
Hydraulic tank capacity	132.5 L	35 gal
Fuel tank capacity	132.5 L	35 gal

Sound & Vibration Levels

Sound pressure level _(ground workstation)	84 dBA	84 dBA
Sound pressure level _(platform workstation)	75 dBA	75 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²


Weight****

CE 4WD (foam filled tyres)	10,548 kg	23,255 lbs
----------------------------	-----------	------------


Standards Compliance

EU Directives: 2006/42/EC - Machinery
(harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

Range Of Motion Z-62/40

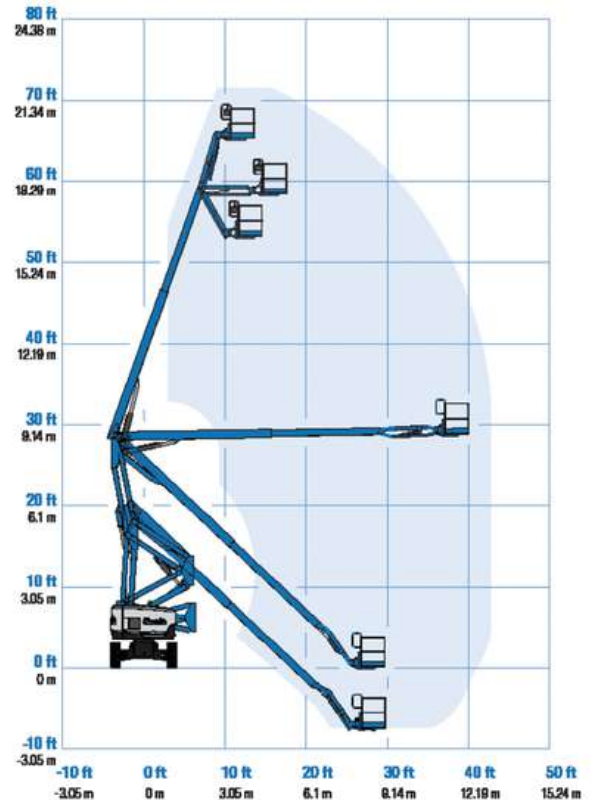

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.
 *** Gradeability applies to driving on slopes. See operators manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

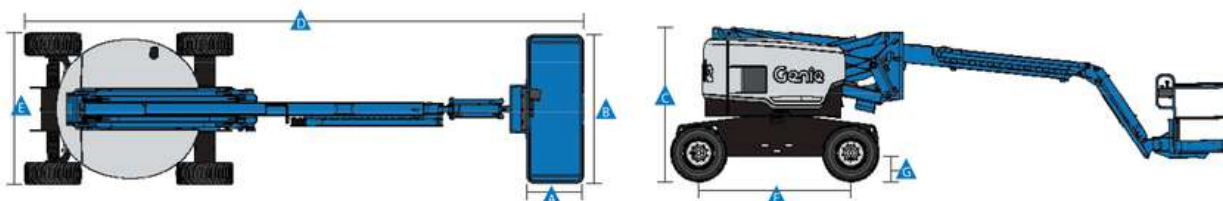

YOUR WORKING AT HEIGHT PARTNER

Features

Standard Features

Measurements

- 20.87 m (67 ft 11 in) working height
- 12.47 m (40 ft 11 in) horizontal reach
- 8.13 m (26 ft 8 in) up and over clearance
- Up to 227 kg (500 lbs) lift capacity

Productivity

- Self-levelling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Telematics-Ready Connector
- Thumb rocker steering
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent & travel alarms
- Flashing beacon
- 360° continuous turntable rotation
- Locking turntable covers
- Zero tailswing
- Positive traction drive
- 2 speed wheel motors
- Certified load sensor

Power

- 12V DC auxiliary power
- Engine protection package
- Anti-restart engine protection
- Auto engine fault shutdown
- Intake air heater (Deutz engine)

Easily Configured To Meet Your Needs

Platform Options

- Steel 2.44 m (8 ft) (standard)
- Steel 1.83 m (6 ft)
- 2.44 m (8 ft) tri-entry**

Jib

- 1.52 m (5 ft) jib boom

Engine Options

- Deutz diesel 35.8 kW (48 hp)
- Perkins diesel 38 kW (51 hp)

Drive Options

- 2 x 4
- 4 x 4

Axle Options

- Active oscillation (standard on 4WD)
- Non-oscillating

Tyre Options

- Rough terrain air-filled (standard)
- Rough terrain foam-filled
- Rough terrain non-marking (air or foam-filled)
- Sealant treated air-filled

Options & Accessories

Productivity Options

- Platform top auxiliary rail
- Weld leads to platform ⁽¹⁾
- Hydraulic oil cooler ⁽²⁾
- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Work lights package (2 on chassis, 2 on platform)
- Dual axis joystick steering
- Biodegradable hydraulic oil ⁽¹⁾
- Aircraft protection kit ^(1,2); platform foam padding and padded disable system
- Hostile environment kit ⁽¹⁾; cylinder bellows, boom wiper seals platform and ground control box covers
- Deluxe hostile environment kit ^(1,2) adds to basic kit center turntable shield, ring gear guard, tail pipe guard, engine cover flaps and air pre-cleaner
- Tilt cut-out option
- Track & Trace ⁽³⁾ (GPS unit providing machine location & operating information)
- Panel cradle package ^(1,2)
- Lockable platform control box covers
- Tool tray
- Operator Protective Structure
- Operator Protective Alarm

Power Options

- Engine gauge package
- AC generator packages (110V/60Hz 220V/50Hz, 3000W) ⁽¹⁾
- Hydraulic MTE Generator kit (110V/120V-220V/240V)
- Diesel air intake pre-cleaner ^(1,2)
- Diesel catalytic scrubber muffler ⁽¹⁾
- Low temperature cut-out module
- Engine heater ⁽²⁾
- Refinery kit with spark arrestor and electric or mechanical Chalwyn valve ⁽²⁾



⁽¹⁾ Factory-fit option only
⁽²⁾ Available on selected models only. See your Genie representative for further information.
⁽³⁾ Includes a first 2 years subscription

