


Introducing the Hugo Lift

Easy, safe, efficient to use, Hugo lift replaces the need for ladders and steps.

Hugo is a lightweight push-around vertical mast lift, easy to transport, and with a compact design it's ideal for the most cramped working environments.

Hugo is excellent for many different tasks including stock picking; facilities maintenance; cleaning; visual merchandising; factory maintenance; data-centre maintenance.

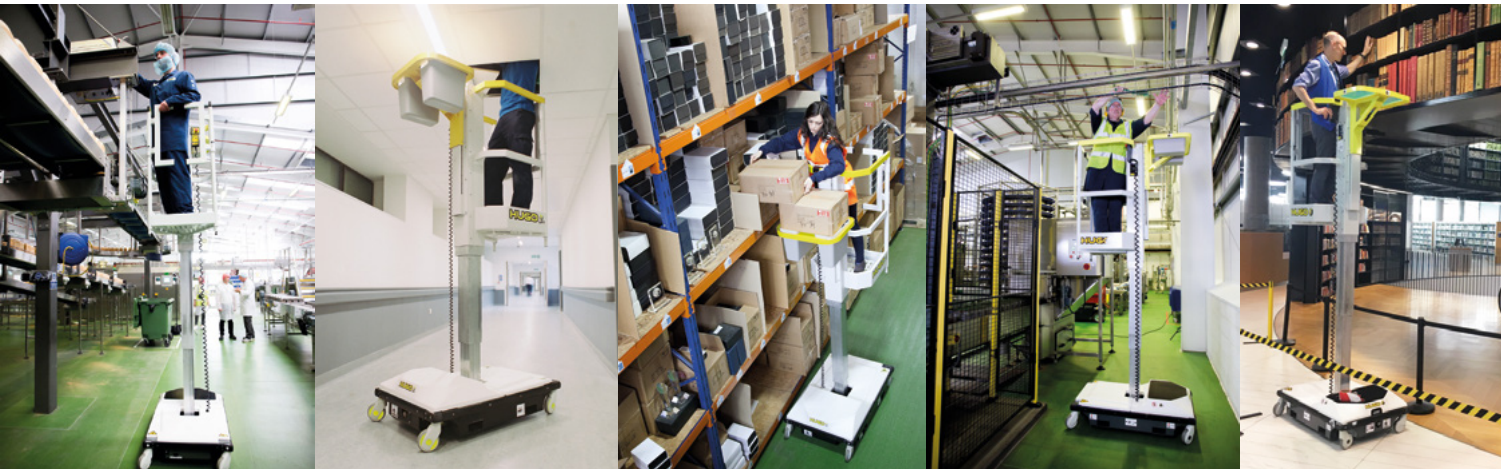

HUGO

Key Features

Removable Storage Bins



Option to replace bins with a flat shelf

Height Adjustable Cargo Shelf



50kg capacity



Platform-Interlock Technology™

Automatically locks the gate when the platform is elevated



Simple Control Unit

- Highly manoeuvrable - ZERO inside turning radius
- Compact size and weight allows easy transportation, and Hugo will go through a standard single doorway
- Lightweight design means Hugo can go in most passenger lifts and on floors with restricted floor loading
- Easy to operate with simple controls for elevating



Manual release brake
Non Marking wheels & corner bumpers

- British design and manufactured
- Minimal operational, maintenance and service costs for years of trouble free service
- Auto-elevation braking ensures operators can't forget to apply brakes

HUGO

Quick Specs


- Up to 4.2m working height
- Height adjustable cargo shelf minimises manual handling
- 0.73m wide x 1.17m long x 1.4m high (when stowed)
- Mains-rechargeable battery pack powers elevation functions, 110/220V self-seeking charger included as standard

From £25 per week, contract hire for incorporated business.


Other finance options available subject to credit approval.

Video

Hugo Lift Overview

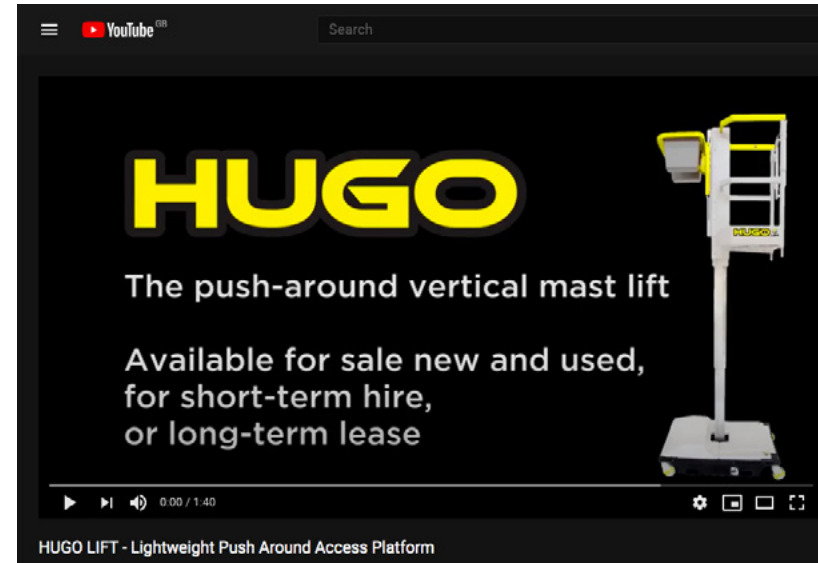




Hugo Familiarisation

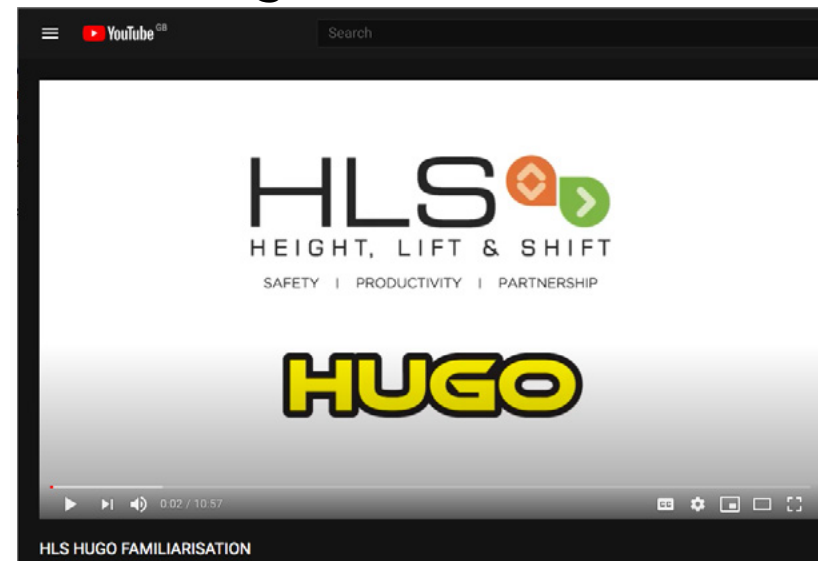

HUGO²

Technical Data

| | | |
|----------|---|---|
| B | Maximum platform height | 2.2m |
| A | Maximum work height | 4.2m |
| G | Platform entry height | 0.39m |
| E | Overall width | 0.73m |
| F | Overall length | 1.17m |
| D | Overall height (stowed) | 1.4m |
| C | Maximum cargo shelf height | 3.28m |
| I | Minimum cargo shelf height | 0.99m |
| H | Cargo shelf adjustment | 0.38m |
| | Operator compartment capacity | 120kg (1 person + tools) |
| | Cargo shelf capacity | 50kg |
| | Ground shelf capacity | 50kg |
| | Wind speed rating | 0m/s (indoor use only) |
| | Maximum wheel loading | 120kg |
| | Total transport rate* | 258kg |
| | Power* | 12V 52A Gel Battery |
| | Mains power supply for battery charging | 110/220V self-seeking |
| | Wheels and steer system | 2 x fixed & 2 x swivel castors |
| | Brakes | 1 foot-operated lever applies rear brakes Front brakes auto applied on elevation |

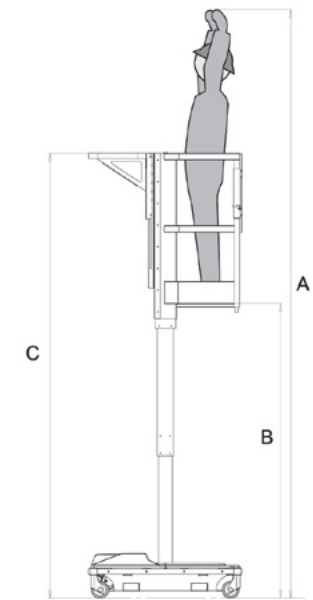

OPTIONAL

*Battery+ Pack

Double your battery pack capacity.
Adds 20kg to overall weight.