




# 567 HIGH FLOW FLOWMETER

The 567 Series flowmeter offers excellent accuracy at high flows. The 4" (102mm) or 5" (127mm) direct-reading dual scale (SCFM/SCFH) is calibrated in SCFM, air. The 567 Series Purge Meter is available with either brass or stainless steel end fittings on 4" (102mm) scale models, or PVC fittings on 5" (127mm) scale models. Additionally, a standard cartridge-style

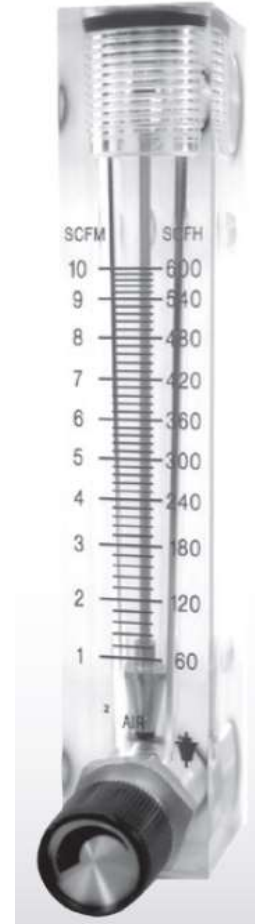

<i>Materials</i>	<i>Specifications</i>
<b>Fittings</b> Brass: 1/4" FPT Stainless Steel: 1/4" FPT PVC: 1" FPT <b>"O" Rings and Packing</b> Buna-N (brass model) Viton® (316L stainless steel model) <b>Body</b> Clear acrylic	<b>Accuracy</b> ±3% on 4" (102mm) ±5% on 5" (127mm) <b>Maximum Pressure</b> 100 PSIG (7 BAR) <b>Maximum Temperature</b> 150°F (65°C)

## Order Information

Model Series	A	B	C	D
Number	Material		Valve	Flow Rate
567	1: Brass* (1/4" FPT) 2: Stainless steel* (1/4" FPT) 3: PVC† (1" FPT)  <i>*Available with 4" (102mm) scale only</i> <i>†Available with 5" (127mm) scale only</i>	0: N/A	0: No valve* 1: Standard valve†  <i>*Not available with brass or stainless steel fittings</i> <i>†Not available with pvc fittings</i>	1: 0.5 to 5 SCFM - 4" (102mm) scale 2: 1 to 10 SCFM - 4" (102mm) scale 3: 4 to 20 SCFM - 4" (102mm) scale* 4: 3 to 25 SCFM - 5" (127mm) scale* 5: 4 to 50 SCFM - 5" (127mm) scale* 6: 10 to 100 SCFM - 5" (127mm) scale*  <i>*Not available with valve</i>

*Can't find what you need? We will be happy to assist you to find the right flowmeter to fit your needs.*