


Tauri Series Temperature-Check Tablets

1 second scan from 3ft with +/- 0.5°C accuracy

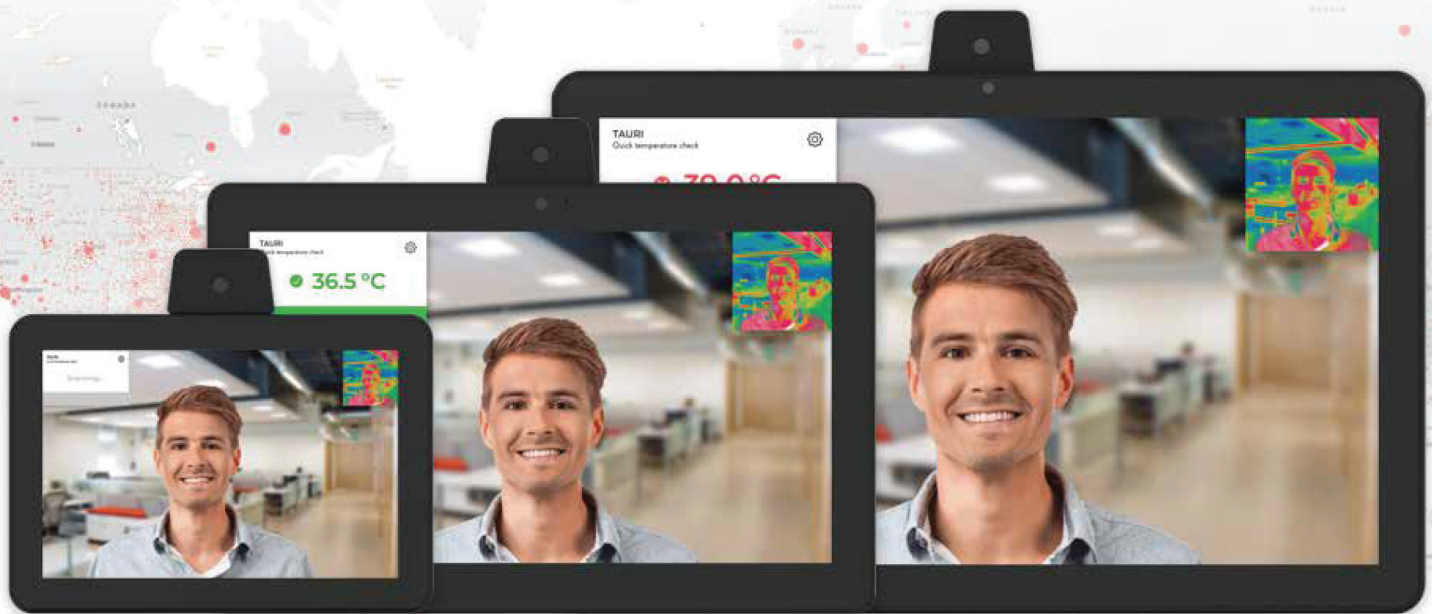

TTS-10
10.1" panel

TTS-15
15.6" panel

TTS-21
21.5" panel


Add an extra layer of protection to your facility and help protect your most valuable assets – your human assets.



Medical




Education

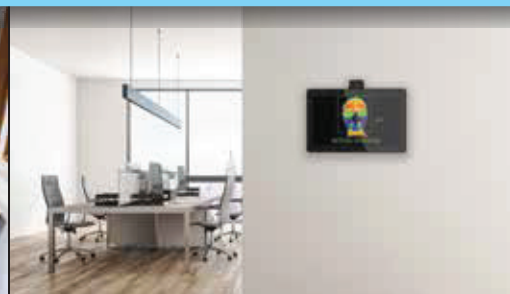

Corporate

***Get a quote today! Contact Office Basics at 800-541-5855
or email solutions@officebasics.com***

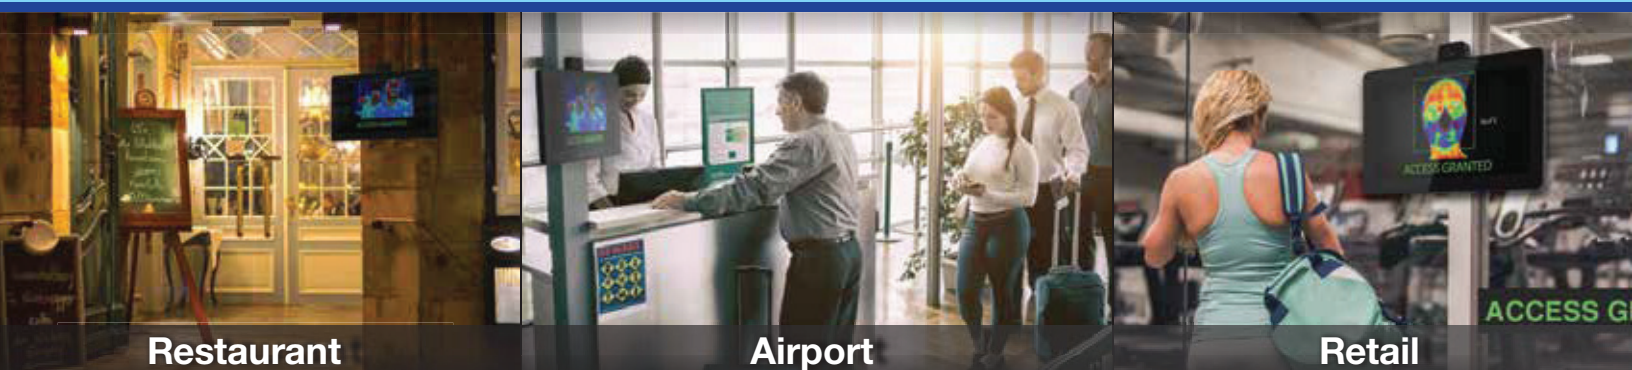

Increase safety with a quick temperature check

To ensure that individuals entering a location are not running a high temperature, Aurora introduces the new infrared temperature sensor/detector. It provides alerts when a person is running a high temperature within 1 second.

The system uses an advanced algorithm for detecting and calculating heat signatures. Based on technology developed in Germany, the highly accurate sensor measures with a tolerance of ± 0.5 degrees Celsius (± 0.9 degrees Fahrenheit). Tauri tablets also come with a 2-year warranty.

Why a temperature sensor?

- Provides the first layer of screening protection
- More hygienic with non-touch infrared technology
- Multiple devices can be monitored by a single user
- Camera reversible 180°

Options:

- APS-1 adjustable pole stand with weighted base
- WMT-1 wall mount
- DTM-1/DTM-2 desktop stands
- Future firmware upgrade options
 - Photo & thermal result email alerts
 - Facial recognition
 - Customized flagging
 - ReAX control
 - Integration with third-party control and access systems



*TTS panel shown with optional
APS-1 pole stand*



WMT-1 wall mount



DTM-1 desktop mount



DTM-2 desktop mount



The Tauri Temperature-Check Tablets are designed to detect temperature anomalies. It's important to understand there are many factors, including environmental and physiological that can impact a person's surface temperature reading. Skin surface temperature vs actual core body temperature may differ either way. The Tauri Temperature-Check Tablets must be operated in accordance with the manufacturer's user guide. Tauri Temperature-Check Tablets are not intended nor designed to diagnose or detect medical conditions including, but not limited to, viruses or other illnesses. The Tauri temperature-check tablets should only be used to detect variations in surface temperature. In the event that an elevated skin temperature is detected, the subject should be advised to check temperature with an approved medical thermometer and the finding confirmed. Absence of an elevated skin temperature does not preclude a fever.

***Get a quote today! Contact Office Basics at 800-541-5855
or email solutions@officebasics.com***

Tauri - Full specifications:

		TTS-10	TTS-15	TTS-21
Screen Size		10 "	15.6 "	21.5 "
Panel Information	Resolution	1280 x 800	1920 X 1080	
	Brightness	350 cd/m²	250 cd/m²	
	Contrast ratio	800:1	1000:1	
	Aspect Ratio	16:10	16:9	
	Active Display Area	134.8 x 216.2mm	344.16 x 193.59 mm	476.0 6 x 267.786 mm
	Viewing angle	H:170 ° / V:170 °	H:178 ° / V:178°	
	Touch Tech.	5 point cap touch (6 H semi-tempered glass)	10 point cap touch (reflective glass)	
Hardware & OS	CPU	RK3288 Cortex A17, Ouad core 1.8GHz		
	RAM	2GB DDR3		
	ROM	8GB eMMC Flash		
	OS	Android 7.1		
Video/ Image	Video format	H.265, VP8, RV, WMV, AVS, H.263. MPEG4, HTMLS, Flash 10	H.265, VP8, RV, WMV. AVS, H.263, MPEG4, Up to 4K2K decoding, HTML5, Flash 10	
	Audio format	MP3/ WMA / AAC etc.		
	Image format	JPEG, BMP, PNG		
Audio	Speaker	1W x 2	2W x 2	
Communication	Bluetooth	EDR 4.0		
	WiFi	802.11 b/g/n 2.4GHz and 5GHz		
	Ethernet	10/100 LAN		
General Informatio n	Color	Black		
	I/O	RJ45 x 1, USB x 1; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; expandable 2 USB	RJ45 x 1;USB x 4; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; GPIO Support	RJ45 x 1;USB x 4; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; RS232 x 2; GPIO Support
	AV Capability	Front Facing Camera 2 MP fixed focus		
	Included in Box	Tablet, Power Adapter, Power cable		
	Sensors	G-sensor		
	Consumption	11W	15W	32W
	Power Input	12V 2A or PoE (802.3at)	12V 5A	
	Operating Environment	Operating: 32°F to 100°F (0°C to 40°C); Storage: -4° F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage- 10%-95%		
	Certification	CE, FCC, ROHS		
	Language	Multi language		
	VESA	VESA 75	VESA 100	
	Warranty	2 Years		
	Infrared temperature Sensor	Power Input	3.3- 3.6V, 50mA, USB connect	
Size		65.2mm x 38.5mm x 22mm		
Temperature check distance		0.3m-1m		
Temperature check range		30°C to 45°C		
Temperature check error		+/-0.5°C@1 Hz		
Dimension	Size (W xDxH)	267 x 34 x 165 mm	383.8 x 223.2 x 30.1mm	534.5 x 326 x 47.6326 mm
	Product Weight	700 g	1.4Kg	3.8Kg
	Box Size	385 x 65 x 222 mm	444 x 348 x 112 mm	582 x 422 x 114 mm

**Get a quote today! Contact Office Basics at 800-541-5855
or email solutions@officebasics.com**

Tauri - Q&A:

Q: How accurate is the infrared sensor?

A: +/- 0.5 degree Celsius.

Q: What is the scan distance?

A: 0.5 to 1 meter.

Q: What is the temperature detection speed?

A: 1 second.

Q: How many people can it detect one time?

A: 1 person can be scanned at a time.

Q: Is there an option to store the data of people checked? If yes, how far back?

A: Currently no. This will be a future option.

Q: Is the unit able to detect people of different heights (e.g. children, adults 3' to 6.5')?

A: There's a visible sensor and a camera that will show your face on the LCD screen. Within the effective scanning range, the sensor should pick up the face, though in extreme cases the tablet might need to be adjusted.

Q: Are there any data/tests available regarding the accuracy of this unit?

A: The accuracy is at 0.5 degree Celsius which is provided by our component manufacturer located in Germany. For the past few months this module has been implemented with projects for access control.

Q: Can the sensor be affixed to a door, away from the tablet that collects data?


A: The sensor must be connected to the tablet at this time.

Q: How does the alert message work? Are there display and sound alerts?

A: On the display screen, it will show the person's face and current temperature. If it senses a temperature higher than what has been set as normal, the tablet will show red and emit an alert sound.

Q: Will the system detect objects and/or animals?

A: The system is designed to only detect people.

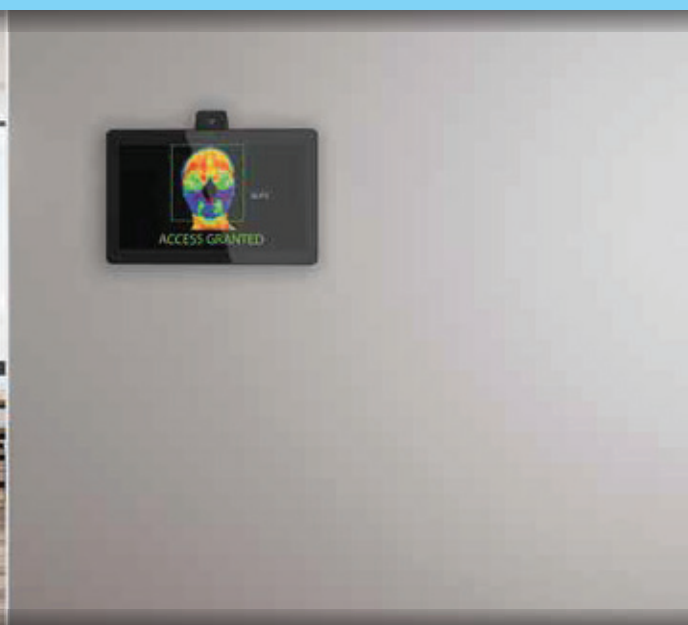

**Get a quote today! Contact Office Basics at 800-541-5855
or email solutions@officebasics.com**