



TEST OUR METAL®

Insulated Mobile Heater/Proofer Cabinet

For 18" X 26" or 14" X 18' Trays, and 12" X 20" Pans

- Double Wall Construction with reinforcement channels welded between corner posts for added support and rigidity.
- Fully insulated top, sides, back and door for energy efficiency and heat retention.
- 20 gauge Aluminum Exterior for durability and cleanability.
- Aluminum Interior for even heat retention and energy efficiency.
- Heavy Duty Frame side panels for an air tight seal and structural rigidity.
- Doors open 270 degrees.
- The tray slides are easily removable for cleaning.
- Designed to hold 18" X 26" or 14" X 18" Trays or 12" X 20" Hotel Pans with variable spacing on 3 1/8" centers.
- Heating unit is removable from the front.
- Heating unit has a blower and rear mounted louvered flue to distribute heat evenly throughout cabinet.
- 2250 Watts, heating elements not exposed to water.
- Separate Heater and Proofer Controls.

Job: _____

Item No. _____

Models

- VCHI-66-RFMG




VCHI-66-RFMG shown with optional perimeter bumper



Made in USA



MODEL #	TRAY CAPACITY		PAN CAPACITY 12X20	HEIGHT DIM A	WIDTH DIM B	DEPTH DIM C	VOLTAGE	SHIPPING CUBE FEET	SHIP WEIGHT
	18" X 26"	14" X 18"							
VCHI-66-RFM	12	24	24	65 1/2"	26 1/2"	34"	120	35	366
VCHI-66-RFMG	12	24	24	65 1/2"	26 1/2"	35 1/8"	120	35	366

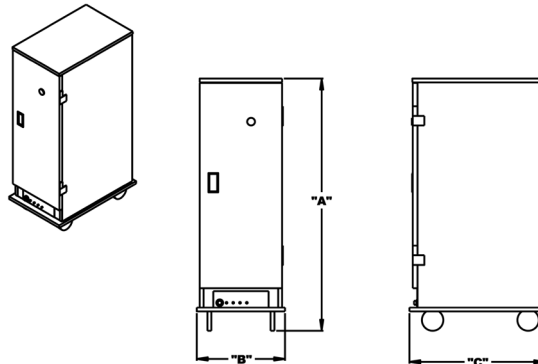

GENERAL: Cabinet shall be constructed with a 20 gauge aluminum exterior and an aluminum interior. All double wall construction insulated with high density fiberglass insulation.

INTERNAL FRAME: Cabinet shall be framed with 1 1/2" x 1 1/2" x 1/8" thick 6063-T5 aluminum tubing in the front and back. Frame shall be fully welded.

BASE: Base shall be .100 aluminum and shall be reinforced with 1/8" thick aluminum cross braces.

INNER CABINET: Inner cabinet shall be all aluminum construction. Cabinet shall be insulated with high density fiberglass. 1" on sides, top and bottom, 1/4" on the back. Cabinet slides shall be constructed using 1/8" thick aluminum extrusions. Cabinet shall come standard with 12 sets of slides which shall be adjustable and removable. Cabinet shall accommodate 18" x 26" sheet pans and 12" x 20" hotel pans. Cabinet shall be heated by the EvenHeat™ System.

DOOR: Door shall have an aluminum interior and exterior, and shall be insulated. Door shall have two (2) heavy-duty, 5/8" thick extruded flag type hinges. Door shall be removable without tools and shall have recessed handles. Door shall have a heavy-duty positive action magnetic latch.

Electrical Characteristics: Cabinet shall have a bottom mounted, proofing/heating control panel consisting of: on and off switch, power indicator lights, and thermostat control. The 1750 watt EvenHeat™ System shall be removable from the front. Cabinet shall be 120 volt, 60 cycles, and 1 phase. Cabinet shall have a cord with a Nema #5-15 plug. Shall come standard with a drip trough to catch condensation.

CASTERS: Cabinet shall come complete with 4-5" non-marking plate casters, 2 rigid and 2 swivel. Casters shall have a weight capacity of 200 lbs each.

Accessories, Options, Variations

- Top Perimeter Bumper
- Transport Locks
- Dutch Style Doors
- Solid Doors
- Polycarbonate Doors
- Push Handle with bumpers.
- Left Hand Door (no additional charge)
- Right Hand Lexan Door
- Left Hand Lexan Door
- PTS – Pass Through
- Extra Set of Slides
- Perimeter Bumper Guard

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.



TEST OUR METAL®

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

REV 2016-11