

High Gain Mobile Omni Antenna

2.2 – 2.4 GHz

Product Code: OMNI-A0132

VERSION: 1.4



SPECIFICATIONS:

Electrical:	
Frequency range	2200 – 2400 MHz
VSWR	< 2.0:1
Nominal input impedance	50 Ω
Connector	N-type female
Feed power handling	50 W
Gain	5 dBi ± 0.5 dB
E-plane 3 dB beamwidth	26°
H-plane 3 dB beamwidth	360°
Polarisation	Vertical
Mechanical:	
Dimensions (l x d)	450 mm x 35 mm
Weight	400 g
Environmental: designed to meet the following specifications	
Wind survival	160 km/h
Temperature (operational)	- 30 °C to +70 °C
Water ingress rating	IP 65 (NEMA 4X)
RoHS	Compliant

PRODUCT DESCRIPTION:

The OMNI-A0132 is a high gain omni-directional antenna that has been designed to be used in high-powered transmit applications to suppress signals in applications like convoy protection and for RCIED. The design of this antenna allows it to bend up to 70°.

The OMNI-A0132 has an omni-directional azimuth pattern with a low level of ripple to ensure all-round protection and an elevation pattern that shows no pattern break-up. This antenna is rated for 50 W indefinite continuous duty power handling.

PRODUCT FEATURES:

- 50 W continuous power handling
- Gain of 5 dBi (typical)
- Self-contained balanced antenna, no groundplane required
- Spring-mounted whip
- Omni-directional H-plane (azimuth) pattern
- RoHS compliant

APPLICATIONS:



- RCIED signal suppression
- VIP protection
- Convoy protection

High Gain Mobile Omni Antenna

2.2 – 2.4 GHz

Product Code: OMNI-A0132

VERSION: 1.4

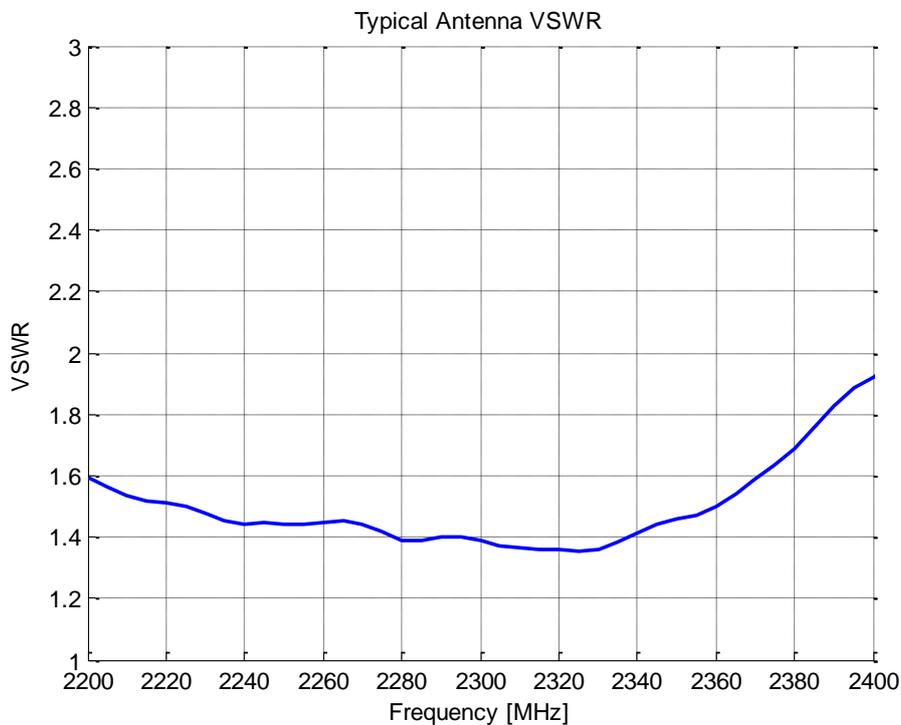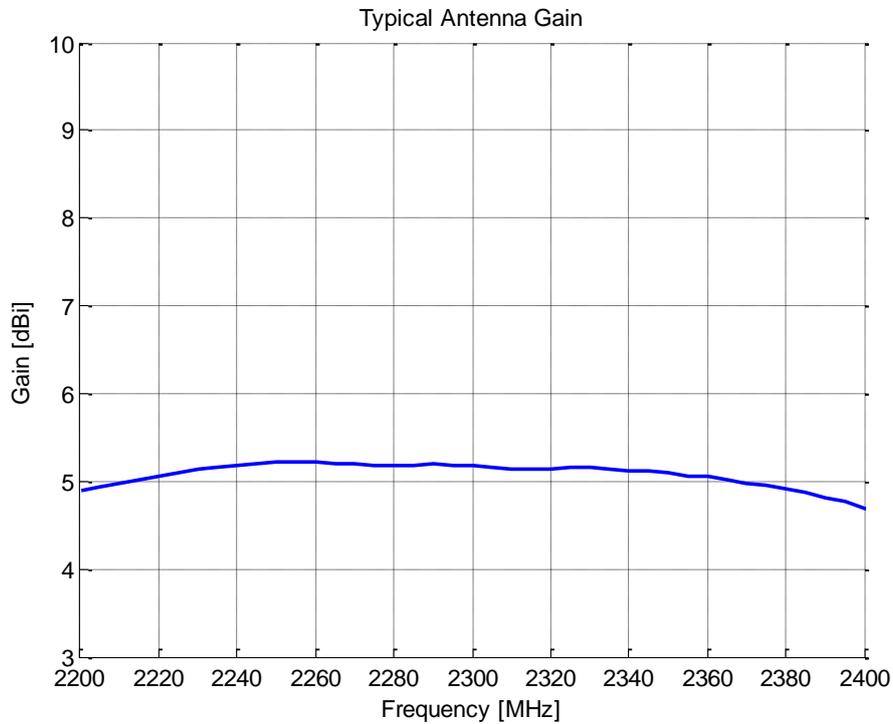

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675



**GAIN THE
ADVANTAGE**