

Test Report No. AJFS1807006937FF Date: JAN.11, 2020 Page 1 of 6

### Neschen Coating GmbH, c/o Filmolux Group

Hans-Neschen-Strasse 1, 31675 Bueckeburg, Germany

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description: FILMOflex Frontlit SC 550 EN/M1

Style/Item No.: /

### **Test Requested:**

EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements - Part 1:

Classification using data from reaction to fire tests, Class B

Test Results: -- See attached sheet --

### **Test Period**:

Sample Receiving Date : DEC.25, 2019

Test Performing Date : DEC.25, 2019 TO JAN.10, 2020

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou

Technical Manager





No. AJFS1807006937FF

Date: JAN.11, 2020

Page 2 of 6

#### I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- 2. EN ISO 11925-2:2010+Corl:2011 Reaction to fire tests Ignitability of building products subjected to direct impingement of flame Part 2: Single-flame source test.

### II. Details of classified product

### a) Nature and end use application

The product "frontlit banner" is defined as a decorative sheet. Its end use for frontlit banner.

### b) Description

The details of the product given above have been prepared from information provided by the sponsor of the test.

Description	FILMOflex Frontlit SC 550 EN/M1	
Color	White	
Mass per unit area	550 g/m <sup>2</sup>	

### Mounting and fixing:

Calcium silicate board, with its density approximate 900kg/m³, thickness approximate 9mm, is as the substrate. The test specimens are fixed mechanically to the substrate with clamp. No joint in the long wing.

#### III. Test results

Test method	Parameter	Number of tests	Results	
EN 13823	FIGRA <sub>0.2MJ</sub> (W/s)		0.0	
	FIGRA <sub>0.4MJ</sub> (W/s)	3	0.0	
	LFS < edge of specimen		Yes	
	THR <sub>600s</sub> (MJ)		0.2	
	SMOGRA (m <sup>2</sup> /s <sup>2</sup> )		50.3	
	TSP <sub>600s</sub> (m <sup>2</sup> )		112.9	
	Flaming particles or droplets		No	

To be continued...



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe vererieal, available on request or accessible at <a href="http://www.ags.com/en/Terms-and-Conditions.agpx.and">http://www.ags.com/en/Terms-and-Conditions.agpx.and</a>, or electronic Format documents ubject to Terms and Conditions from the Conditions of the Condit



### No. AJFS1807006937FF

Date: JAN.11, 2020

Page 3 of 6

Test method	Parameter	Specimen number	Results
EN ISO 11925-2 Exposure = 30 s	<i>F</i> s ≤ 150 mm	6	Yes
	Ignition of the filter paper	O	No

### IV. Classification and direct field of application

This classification has been carried out in accordance with EN 13501-1:2007+A1:2009.

#### a) Classification

The product, Frontlit banner, classification is as following,

Fire behaviour		Smoke production			Flaming droplets	
В	_	s	2	,	d	0

## Reaction to fire classification: B - s2, d0

Remark: The classes with their corresponding fire performance are given in annex A.

### b) Field of application

This classification for the submitted sample is valid for the following end use condition:

- --- With all substrate classified as A1 and A2
- --- With mechanical fixing.
- --- No joint

This classification is valid for the following product parameters:

---Characteristics of various layers identical to those as described in § II b) of this test reports.

**Statement:** The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

### Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apy and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.asp. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein Any holder of this document. Attention is drawn to the initiation of liability, indemnification and jurisdiction issues defined therein Any holder of this document. This issues the service of the defined therein and the defined therein and the defined therein and the defined therein and the deciment and the document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the .Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only attention; for cleck the authenticity of testing / insepticion report & certificate, please contact us at telephone: (86-755) 830 Attention; for check the authenticity of testing / insepticion report & certificate, please contact us at telephone: (86-755) 830 and the contact of the contact and the substitution of the contact and the description and the contact and the substitution of the contact and the contact and the substitution of the contact and the substitution of the contact and the contact and the substitution of the contact and the contact and the substitution of the contact and the contact and the substitution of the contact and the contact and the substitution of the contact and the contact and the substitution of the contact and the contact and the substitution of the contact and t



No. AJFS1807006937FF

Date: JAN.11, 2020

Page 4 of 6

### Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)		Classification criteria	Additional classification	
	EN ISO 1182 <sup>a</sup> and		△ T≤30°C , and m 50%, and t≤0 (i.e.no sustained flaming)	-	
A1 EN ISO 1716			PCS≤2.0MJ/kg <sup>a</sup> and   PCS≤2.0MJ/kg <sup>b c</sup> and   PCS≤1.4MJ/m <sup>2 d</sup> and   PCS≤2.0MJ/kg <sup>e</sup>	-	
	EN ISO 1182 <sup>a</sup> or		△ <i>T</i> ≤50°C , and △ <i>m</i> ≤50%, and t <sub>f</sub> ≤20 s	-	
A2	EN ISO 1716	and	PCS≤3.0MJ/kg a       and         PCS≤4.0MJ/m² b       and         PCS≤4.0MJ/m² d       and         PCS≤3.0MJ/kg e	-	
	EN 13823		FIGRA≤120W/s and LFS < edge of specimen and THR <sub>600s</sub> ≤7.5MJ	Smoke production fand Flaming droplets/particles g	
В	EN 13823	and	FIGRA≤120W/s and LFS < edge of specimen and THR 600s≤7.5MJ	Smoke production fand Flaming droplets/particles g	
	EN ISO 11925-2 Exposure =30s		within 60s <i>F</i> s≤150mm		
EN 13823	EN 13823	and	FIGRA≤250W/s and LFS < edge of specimen and THR <sub>600s</sub> ≤15MJ	Smoke production fand Flaming droplets/particles g	
	EN ISO 11925-2 Exposure=30s		Fs≤150mm within 60 s	Training dropleto/particles	
D	EN 13823	and	FIGHA ≤750W/s	Smoke production fand	
	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s	Flaming droplets/particles 9	
E	EN ISO 11925-2 i Exposure =15s		Fs ≤150mm within 20 s	flaming droplets/particles h	

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer verleaf, available on request or accessible at <a href="http://www.sgs.com/ien/Terms-and-Conditions.sspx.and">http://www.sgs.com/ien/Terms-and-Conditions.sspx.and</a>, for electronic format documents statements of the subject of the service of the servi

|No. 301, Suriight Road, 2 Block, Suriight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国 - 浙江 - 安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1807006937FF

Date: JAN.11, 2020

Page 5 of 6

F No performance determined

<sup>e</sup> For the product as a whole.

 $s1 = SMOGRA \leq 30m^2/s^2$  and  $TSP_{600s} \leq 50m^2$  ;  $s2 = SMOGRA \leq 180m^2/s^2$  and TSP $\leq$  200m<sup>2</sup>; s3 = not s1 or s2

<sup>9</sup> d0 = No flaming droplets/ particles in EN 13823 within 600 s;

d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;

d2 = not d0 or d1.

Ignition of the paper in EN ISO 11925-2 results in a d2 classification.

h Pass = no ignition of the paper (no classification);

Fail = ignition of the paper (d2 classification).

To be continued...



<sup>&</sup>lt;sup>a</sup> For homogeneous products and substantial components of non-homogeneous products.

b For any external non-substantial component of non-homogeneous products.
c Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR<sub>600s</sub> ≤ 4,0 MJ, and s1, and d0.

<sup>&</sup>lt;sup>d</sup> For any internal non-substantial component of non-homogeneous products.

In the last phase of the development of the test procedure, modifications of the smoke measurement system have been introduced, the effect of which needs further investigation. This may result in a modification of the limit values and/or parameters for the evaluation of the smoke production.

Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.




No. AJFS1807006937FF

Date: JAN.11, 2020

Page 6 of 6

# **Photo Appendix:**

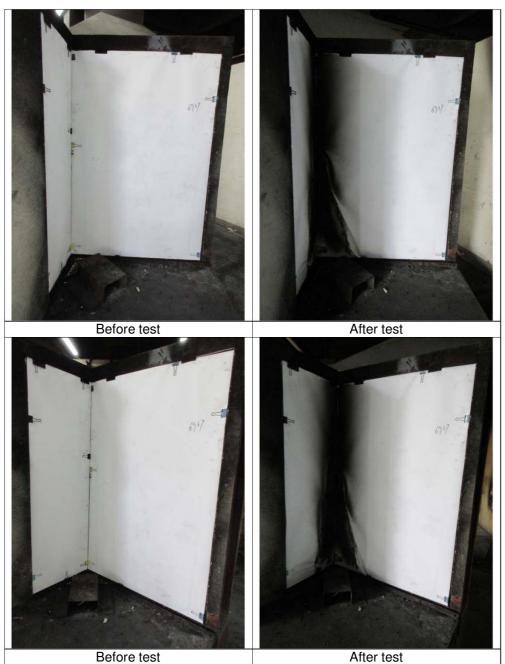

SGS authenticate the photo on original report only

\*\*\*End of Report\*\*\*



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printec overleaf, available on requestor accessible at http://www.sag.com/en/Terms-and-Conditions.aspx and Cenditions for Electronic Documents at http://www.sag.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exponent parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery classification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and south sample(s) are retained for 30 days only.

| No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 | t (86-572) 5018825 f (86-572) 5018829 | www.sgsgroup.com.cn |
中国・浙江・安吉县阳光工业园二区阳光大道301号 | 邮编:313300 | t (86-572) 5018825 f (86-572) 5018829 | e sgs.china@sgs.com