

PrintTex®

Softimage Lightbox

Fields of application

.01 .02 .04 .05 .06 .07 .10 .11


Specifications

	599180 173
	100 % polyester
	ca. 103/ 155/ 252/ 310/ 505 cm ca. 41/ 61/ 99/ 122/ 199 inch
	B-s1, d0 DIN EN 13501-1
	ca. 205 g/m ² ca. 6.1 oz/yd ²
	rolls 25/ 50 m 27/ 55 yd
	length: 290.7 N cross: 1119.3 N DIN EN ISO 13934-1
	length: 65.4 % cross: 34.0 % DIN EN ISO 13934-1
	blank: 5 DIN EN ISO 105-B02
	blank: 35.7 % DIN EN 410
	blank: 93.7 DIN 5033-1
	length: 2.2 % cross: 0.9 % DIN EN 14704-1
	cold, heat, ultrasonic cut

Printing methods



Individual applications

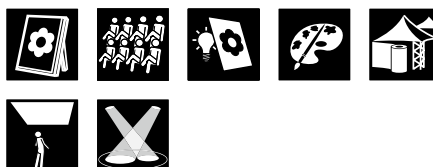

Certifications



Certified for
HP Latex Inks