

PRINTER TYPES



UV



LX

FLAME RETARDANT STANDARDS



DIN4102-B1

NFPA701

EN13501-1

TS62

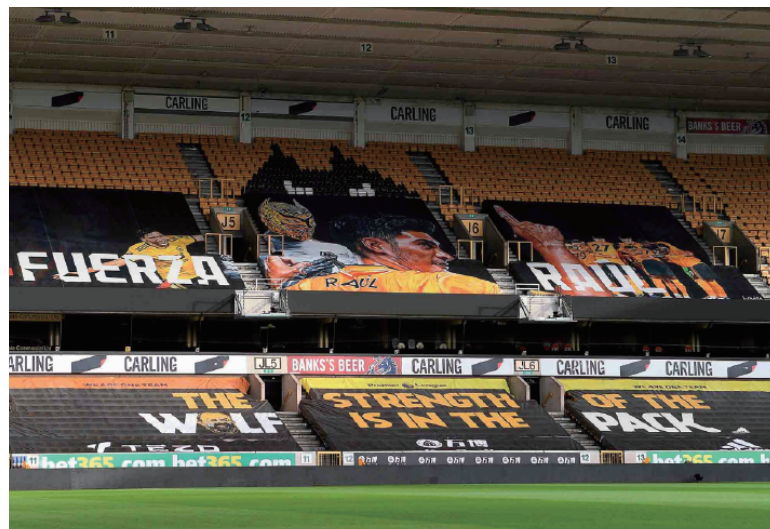


Photo courtesy of DIS Graphics UK (for Wolves F.C. Molineux Stadium)

APPLICATIONS

Mesh banners. Window curtains.

PROPERTIES	TEST METHOD	RESULT	UNIT
Weight		180 ± 20	gsm
Thickness		0.35 ± 0.02	mm
Regular roll length		50	metres
Max Width	DIN EN ISO 2286-1	5	metres
Composition	Polyester yarn • PVC-free coating		
Coating	Water-based • Phthalate free		
Characteristics	Lightweight • Perfect for high quality digital printing		
Tensile Strength (W/F)	DIN 53354	200/166	Kg/5cm
Tear Resistance (W/F)	DIN 53363	35/30	Kg
Temperature Range	DIN 53361	-40~+90	°C

Test data is for reference only and may vary according to usage.


 CARBON FOOTPRINT
 Sustainability Services

No. 777 Fengguan Road, Fengjing Industrial Park,
 Jinshan District, Shanghai, China. Post Code:201501
 TEL: +86-21-6463 2409
 FAX: +86-21-6463 2157
 EMAIL: info@goforkavalan.com
 WEB : www.goforkavalan.com

Greenhouse gas emissions of packaged PVC-free Kavalan banner (model Spiderweb 300) for industrial application are **1.0 kgCO₂e** per 1 square meter (m²) unit. The calculation is based on the data collected from January 2020 to September 2020 from cradle to grave.
 SGS Report No. **LCA20123-5**