

SHARKSKIN™

The Ultimate Roof Underlayment *Ultra*®

SHARKSKIN ULTRA 10 SQ. ROLL Instructions and Information

SHARKSKIN ULTRA®


Use: Under tile, metal, slate and asphalt shingle roof systems.

Roll size: 48" x 250' approx. Roll weight: 50 lbs. approx.

Coverage: approx. 960 sq. ft. per roll or less depending upon overlap and roof design.

Installation: SHARKSKIN ULTRA® roofing underlayment should generally be installed above ventilated attic spaces in most cases. SHARKSKIN ULTRA® is considered a vapor barrier, check with local building codes. **Preparation:** The deck surface must be dry and free of dust, dirt, loose nails, debris and other protrusions. **Damaged sheathing must be replaced.** SHARKSKIN ULTRA® is laid horizontally parallel to the eave of the roof with the printed side up. Overlaps run with the flow of water in a shingling manner, a minimum 2-inch (4-inch is recommended) horizontal laps and a minimum 6-inch vertical laps. Use straight blade utility knife or scissors to cut. **Fastening:** SHARKSKIN ULTRA® is attached to the roof deck with corrosion resistant 3/8" roofing nails, or No.12 gauge corrosion-resistant steel or stainless steel nails having 1-inch diameter corrosion resistant metal round cap, tin tag, or plastic round top caps, plastic caps fastened with corrosion resistant staples per diagram. Or corrosion resistant construction staples installed a minimum (6"-12" O.C. at all seams). Do not over drive fasteners as this may damage the underlayment. The underlayment must be fastened as necessary to hold in place and to allow for a safe walkable surface for the installer. SHARKSKIN ULTRA® has a maximum 12 month exposure rating.

BE CAREFUL TO OBSERVE SAFE ROOFING CODES & PRACTICES (OSHA). USE CAUTION WHEN WALKING OR STANDING ON SHARKSKIN ULTRA®. COEFFICIENT OF FRICTION MAY CHANGE WITH WET, DUSTY OR ICY CONDITIONS. FAILURE TO USE PROPER SAFETY GEAR AND FOOTWEAR CAN RESULT IN SERIOUS INJURY.

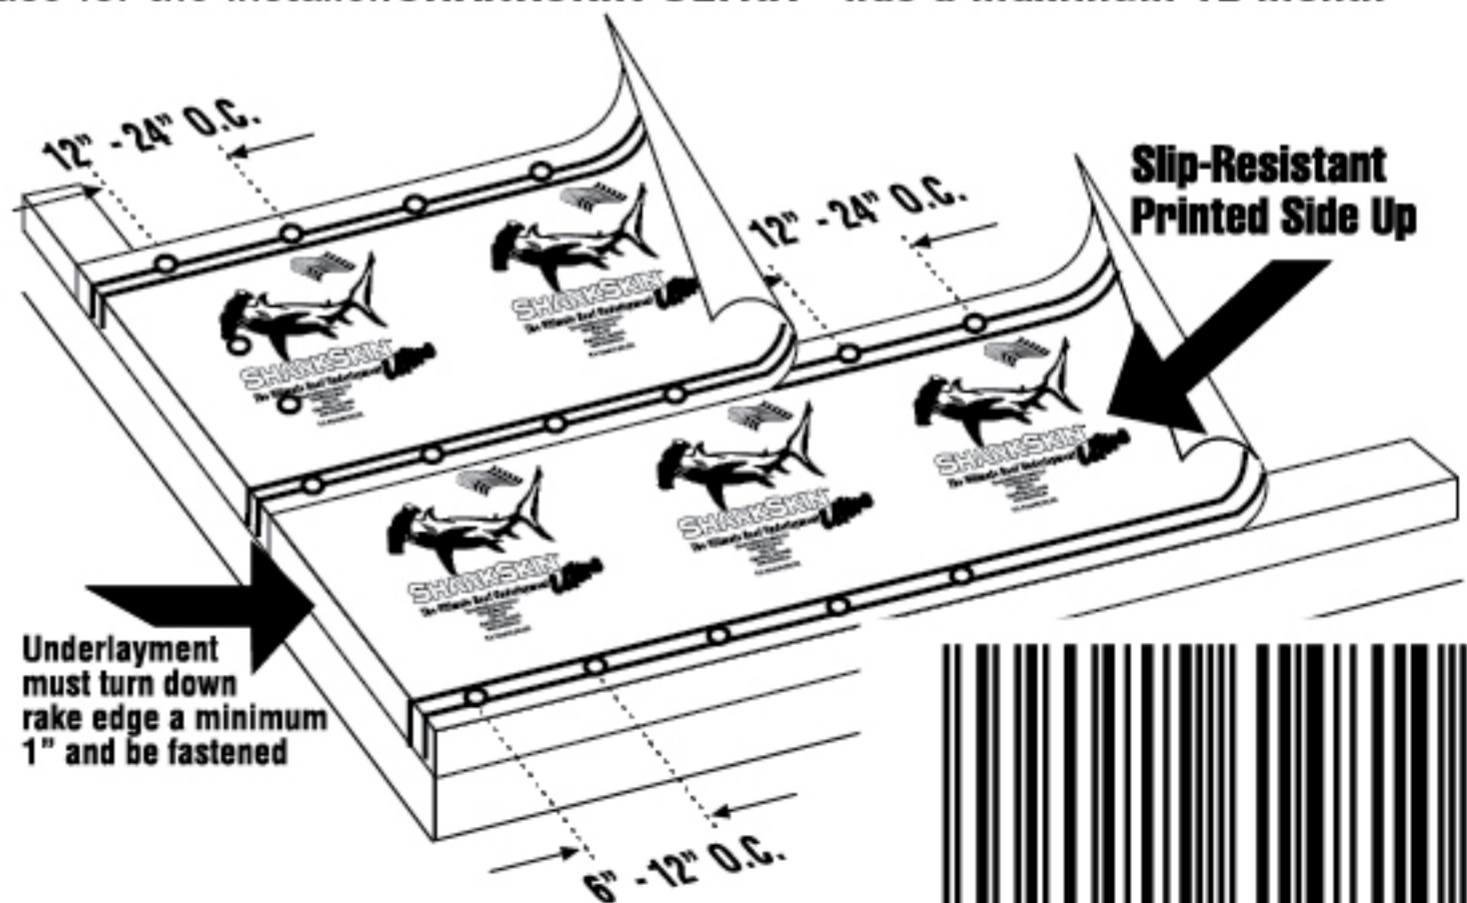

Florida Building Code



ESR-1708
ICC-ES AC188
ICC-ES AC48
EXCEEDS ASTM D226

U.S. Patent #8,765,251
U.S. Patent #6,308,482

Kirsch Building Products LLC
1464 Madera Road, #N Suite 387
Simi Valley, CA 93065
www.sharkskinroof.com
1-877-742-7507

Underlayment must turn down rake edge a minimum 1" and be fastened



TEXAS DEPARTMENT OF INSURANCE