


PM DATA SHEET

SPECIFICATIONS & PERFORMANCE


Porta-Matic™ Battery-Powered Portable Pump

PERFORMANCE

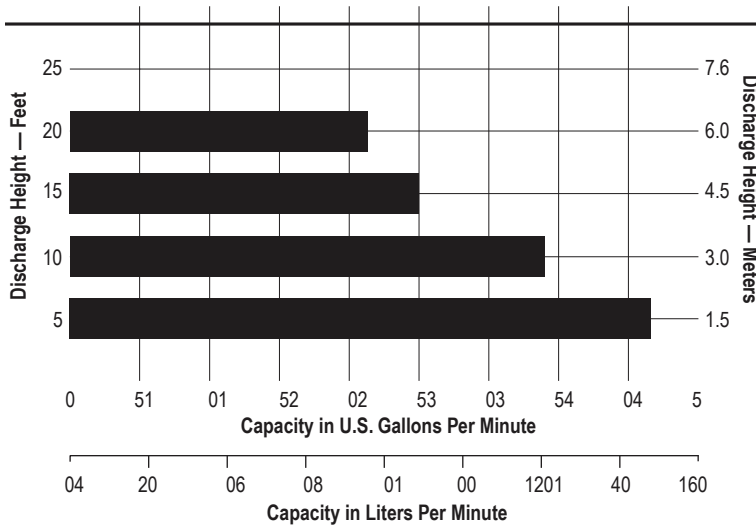

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

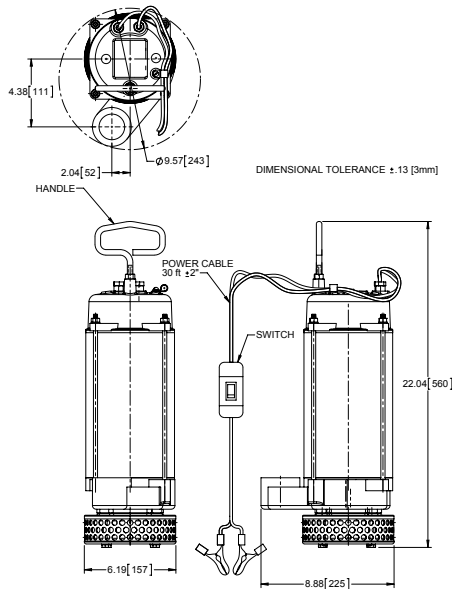

SPECIFICATIONS

Flow Rate

Adjustable to43 gpm (163 lpm)

Max Head Pressure

.25' (7.6m)

Fluid Outlet

. 1.5" NPT or BSPT (female)

Weight

. 33lbs (14.37kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
 800 North Main Street | Mansfield, OH 44902 USA
 Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

PortaMatic-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.