



Terms and Conditions



Website



Catalogue

DATA SHEET



FS 70792

# TILELINK

## Steel Rafter Mounted Anchor



SafetyLink's team designed the TileLink roof anchor (**winner of an episode on ABC1 The New Inventors**) with unique energy absorbing capabilities, to reduce the risk of injury to the person and damage to the structure.


- Fast simple unit for installation, fall protection whilst working at heights.
- Low profile reflective design is a plus for any commercial or residential enterprise wanting to maintain an aesthetically pleasing façade.
- Designed for use on steel rafters under tiles, no need to cut sarking, eliminating waterproofing issues.
- Install with three (3) alternate fixing rows: use 5 x use 8mm Bulbtite Rivets (Drill Size 7.8-8.2mm, 27.7mm length, 1.0-9.5mm grip).
- Highly flexible design ensures installation to the majority of roof tile profiles.

### WHAT AM I USED FOR?

A height safety anchor point designed for use on steel rafters with tiled roof, will arrest from any direction.

### STANDARDS

Complies with: AS/NZS 1891.4 and EN 795:2012.

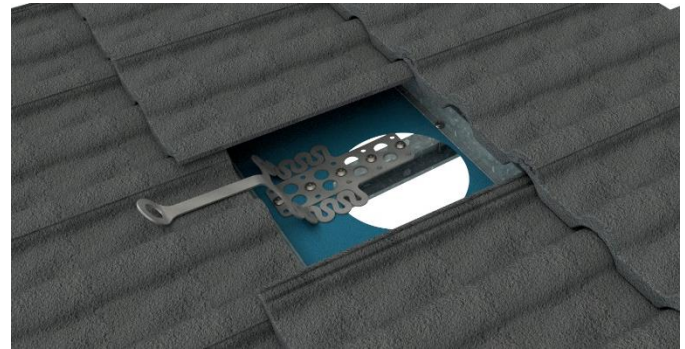

Product Code	Description	Weight (kg)	Rated	Material
TILEL001_SFM	Rafter Mounted Anchor SFM	0.630	15kN	316 Stainless Steel
TILEL001+Rivets	Rafter Mounted Anchor + 5 Rivets	0.669	15kN	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

**Patents:** SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@safetylink.com](mailto:ip@safetylink.com) and quote the product code.

Doc ID: MKT-85 Version: 10.0

[www.safetylink.com](http://www.safetylink.com) | [info@safetylink.com](mailto:info@safetylink.com) | 1300 789 545 | +61 2 4964 1068