



# NL4560 G4 EDGE

## Crop Nutrient Applicator

### Precision Application

- Boundary spreading
- Precise independent spinner control and monitoring
- Automatic feedgate and fan frame control
- Scales for static and infield calibration
- Optional MultiApplier: Spread up to 4 products

### Ease of Use

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer to calculate height


### Ease of Maintenance

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel feedgate, spinner jacks, and handles

### Trailer Features

- Heavy-duty trailer main frame with universal hitch
- 4-wheel hydraulic braking system
- Walking suspension with 15" of travel
- High floatation tires for light footprint

# NL4560 G4 Specifications

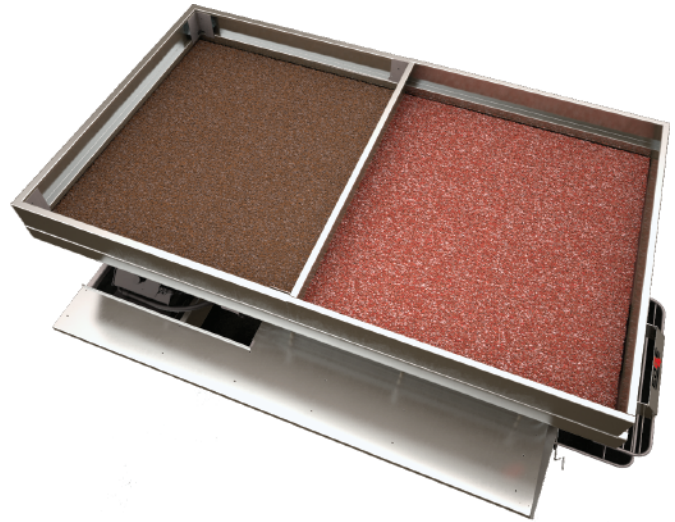

## [Optional] MultiApplier

Struck Capacity [1 Bin]: 253 Cu. Ft.  
Struck Capacity [2 Bin]: 414 Cu. Ft.

## Features

- Struck capacity of 608 ft<sup>3</sup> (17.22 cu.m) with sideboards.
- High floatation tires leave a light foot print despite massive payload.
- Tire size, 66 x 43 x - 25, 20 ply, and 20 psi.
- 16' - 102+6 wide body, available in 304 stainless steel or painted 409 stainless steel.
- Trailer mainframe with universal bull pull hitch, and four wheel braking system.
- Walking suspension, that provides over 15" of travel.

## Conveyor System

- 30" (76 cm) #4 belt-over-chain
- 24" (61 cm) wide feedgate can be opened up to 11" (28 cm) tall



Products and specifications subject to change without notice.  
Photos and illustrations may or may not include optional equipment.  
New Leader® is a registered trademark of Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.  
© 2021 Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.  
NL5060-2021-01