



NL5060 G5

Large Capacity Pull-Type Spreader

Precision Application

- 16-section swath width control
- 1/2 width spreading
- Last Pass Control
- Boundary spreading
- Precise independent spinner control and monitoring
- Automatic feedgate and fan frame control
- Scales for static and infield calibration
- Optional MultiApplier: Spread up to 2 products


Ease of Use

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Product output sensors
- Feedgate optimizer with automatic adjustment

Ease of Maintenance


- Centralized grease banks
- Automatic chain tensioner
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts, and take-up brackets
- Diagnostic feedback

Swath Width Control

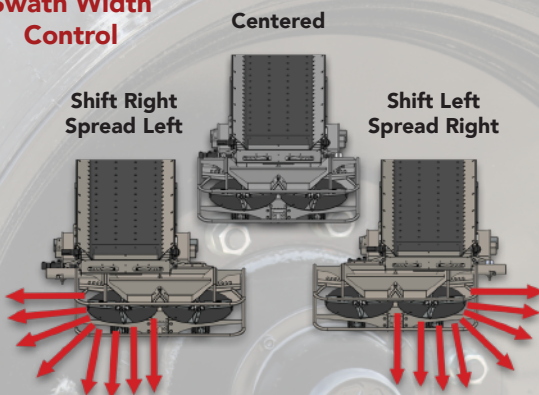



NL5060 G5 Specifications

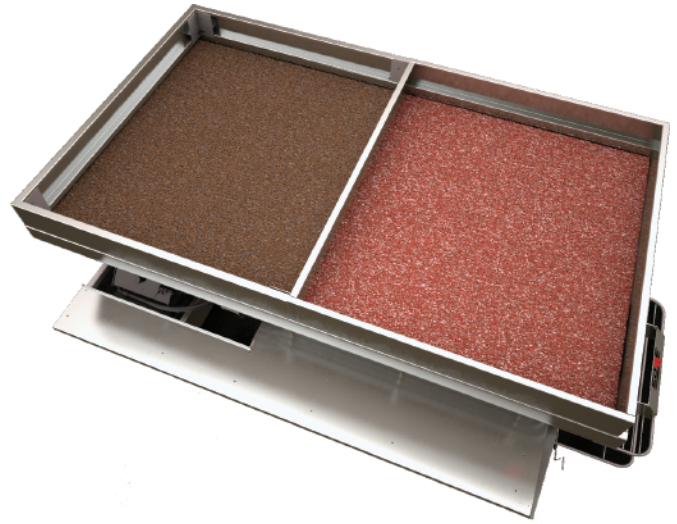

[Optional] MultiApplier

Struck Capacity [1 Bin]: 253 Cu. Ft.
Struck Capacity [2 Bin]: 414 Cu. Ft.

Trailer Features

- Heavy-duty trailer main frame with universal hitch
- 4-wheel hydraulic braking system
- Walking suspension with 15" of travel
- High floatation tires for light footprint

Overall Length

16 ft (4.88 m)
292 in (741cm)

Struck Capacity

606 cu ft
22.44 cu yds
17.2 cu m

Weight*

18,300 lbs
8,300 kg
**estimated*



Products and specifications subject to change without notice.
Photos and illustrations may or may not include optional equipment.
New Leader® is a registered trademark of Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.
© 2021 Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.
NL5060-2021-01