



ULTRASUN
RECHARGE YOURSELF

PRODUCT LEAFLET



E4

SPECIAL SILVER
EDITION



AVAILABLE COLOUR



Sunny Silver Metallic

CONTROL SYSTEMS



Wireless
Management
System



Paytronic

* When placing the UltraSun device make sure that the device is surrounded by 10-15 centimetres of free space for air circulation.

* The dimensions indicate an open UltraSun device.

STANDARD EQUIPPED WITH



Lumax
Control



Electronic
Ballasts



BodyCooler

LAMP SPECIFICATIONS

ULTRASUN


Top Lamps	14 x Sunfit XL+ DUO 120W 190 cm
Base Lamps	14 x Sunfit XL3 120W 190 cm
Facial Lamps	-
Maximum exposure time	20 minutes



TECHNICAL SPECIFICATIONS

ULTRASUN

Power supply	Single phase 230V + PE 50/60 Hz
Plug and cable	No plug ¹ / 3 x 2,5 mm ²
Power	3.600W
Breaker/fuse (slow)	1 x 20A
Minimum net weight ²	125 kg
Minimum crated weight ²	150 kg
Boxed dimensions	227 x 96 x 85 cm

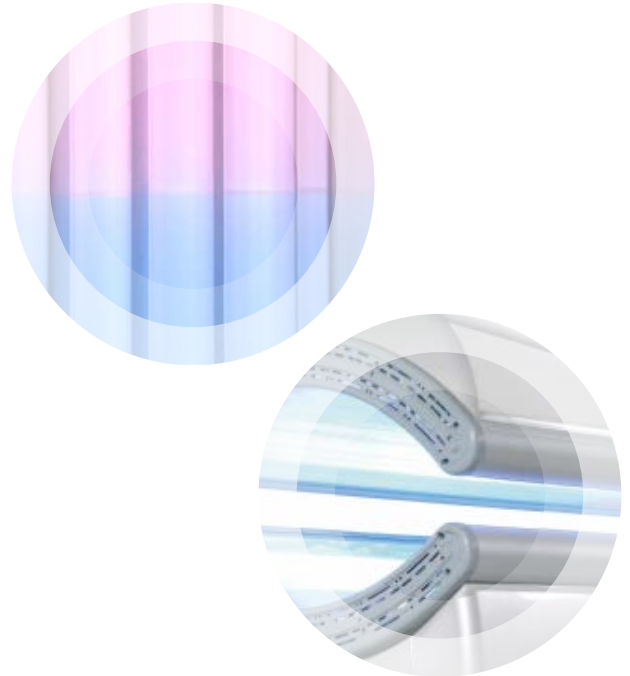

¹ At special request this Ultrasun device can be supplied with an F-type plug. Please ask your Ultrasun dealer and electric technician for details.

² Minimum weight is based on an Ultrasun with standard configuration. Machine specific weight information available on request.



Granaatstraat 6
7554 TR Hengelo
The Netherlands



+31 (0)74 2912215



info@ultrasun.nl



Ultrasuninternational.com