



ULTRASUN
RECHARGE YOURSELF

PRODUCT LEAFLET



E6

2020-2021



AVAILABLE COLOURS



Dream White
Metallic



Fancy Red
Metallic

CONTROL SYSTEMS



Wireless
Management
System



Paytronic

* When placing the Ultrason E6 make sure that the device is surrounded by 10-15 centimetres of free space for air circulation.
* The dimensions indicate an open Ultrason E6.

STANDARD EQUIPPED WITH



Solar
Control



Electronic
Ballasts



TopCooler



Music



Handles



Changing
Cubicle



Collatan
Lamps

ADDITIONAL OPTIONS

LAMP SPECIFICATIONS


ULTRASUN E6

NON-EU | UV4

Total Lmps	42 x Sunfit XXL 200W E-Tronic 200 cm
Maximum exposure time	15 minutes

EU | UV3

Total Lamps	42 x Sunfit XXL3 200W E-Tronic 200 cm
Maximum exposure time	20 minutes

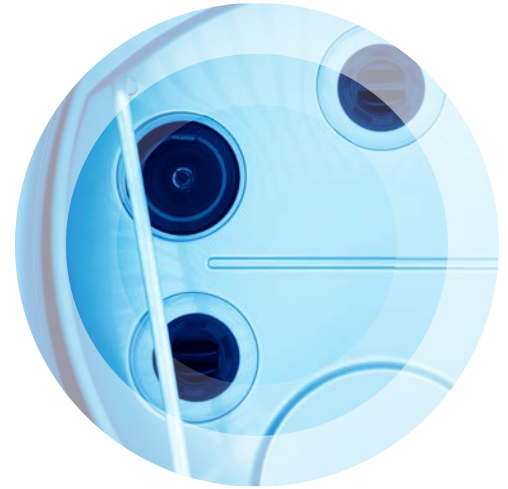

TECHNICAL SPECIFICATIONS

ULTRASUN E6

Power supply	3 x 400V + N + PE 50/60 Hz
Plug and cable	16A CEE 5 x 2,5 mm ²
Power	8.800W
Breaker/fuse (slow)	3 x 16A
Minimum net weight ¹	215 kg
Minimum crated weight ¹	255 kg
Boxed dimensions	227 x 114 x 120 cm



¹ Minimum weight is based on an Ultrason E6 with standard configuration. Machine specific weight information available on request.



Granaatstraat 6
7554 TR Hengelo
The Netherlands



+31 (0)74 2912215



info@ultrasun.nl



UltrasunInternational.com