



ULTRASUN
RECHARGE YOURSELF

PRODUCT LEAFLET



i9

2020-2021



AVAILABLE COLOURS



Dream White
Metallic



Xtreme Orange
Metallic

CONTROL SYSTEMS



Ultrasun
Manager



Paytronic



Wireless
Management
System

* When placing the Ultrasun i9 make sure that the device is surrounded by 10-15 centimetres of free space for air circulation.
* The dimensions indicate an open Ultrasun i9.

STANDARD EQUIPPED WITH



IQ Touch
Control



18+
Age
Control



Electronic
Ballasts



TopCooler



VibraPlate



Handles



Music Pro



Wellness
Sound



Voice
Guide



Bluetooth



Rainbow
Manager



Air
Extraction
Hose

ADDITIONAL OPTIONS



Breeze

+



Aroma



Airco



Changing
Cubicle



CollaTan
Lamps

LAMP SPECIFICATIONS


ULTRASUN i9

NON-EU | UV4

Total Lamps	64 x Sunfit XXL 200W E-Tronic 200 cm
Maximum exposure time	12 minutes

EU | UV3

Total Lamps	64 x Sunfit XXL3 200W E-Tronic 200 cm
Maximum exposure time	20 minutes

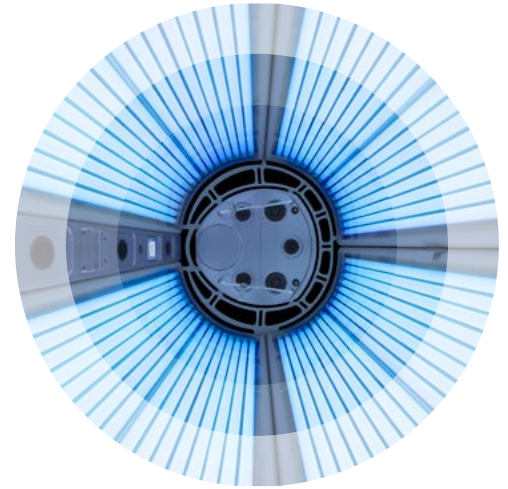

TECHNICAL SPECIFICATIONS

ULTRASUN i9

Power supply	3 x 400V + N + PE 50/60 Hz
Plug and cable	32A CEE 5 x 4 mm ²
Power (+airco)	12.400W (13.400W)
Breaker/fuse (slow) (+airco)	3 x 25A (3 x 35A)
Minimum net weight ¹ (+airco)	290 kg (350 kg)
Minimum crated weight ¹ (+airco)	335 kg (415 kg)
Boxed dimensions (+airco)	227 x 114 x 156 cm (+ 120 x 80 x 99 cm)



¹ Minimum weight is based on an Ultrason i9 with standard configuration. Machine specific weight information available on request.



Granaatstraat 6
7554 TR Hengelo
The Netherlands



+31 (0)74 2912215



info@ultrasun.nl



Ultrasuninternational.com