


# Template for XRA/XSE Rose With MC Mortise Lock

Case Size: 4" x 6-7/32" x 1"(102mm x 158mm x 25mm)  
Backset: 2-3/4"(70mm)  
Lock Front: 1-1/4" x 8" x 15/64"(32mm x 203mm x 6mm)

Knob or Lever to Cylinder: 3-55/64"(98mm)  
Knob or Lever to Turn Piece: 2-11/16"(68mm)

\* For Hollow Metal Doors, tap where indicated for #12x24 machine screws

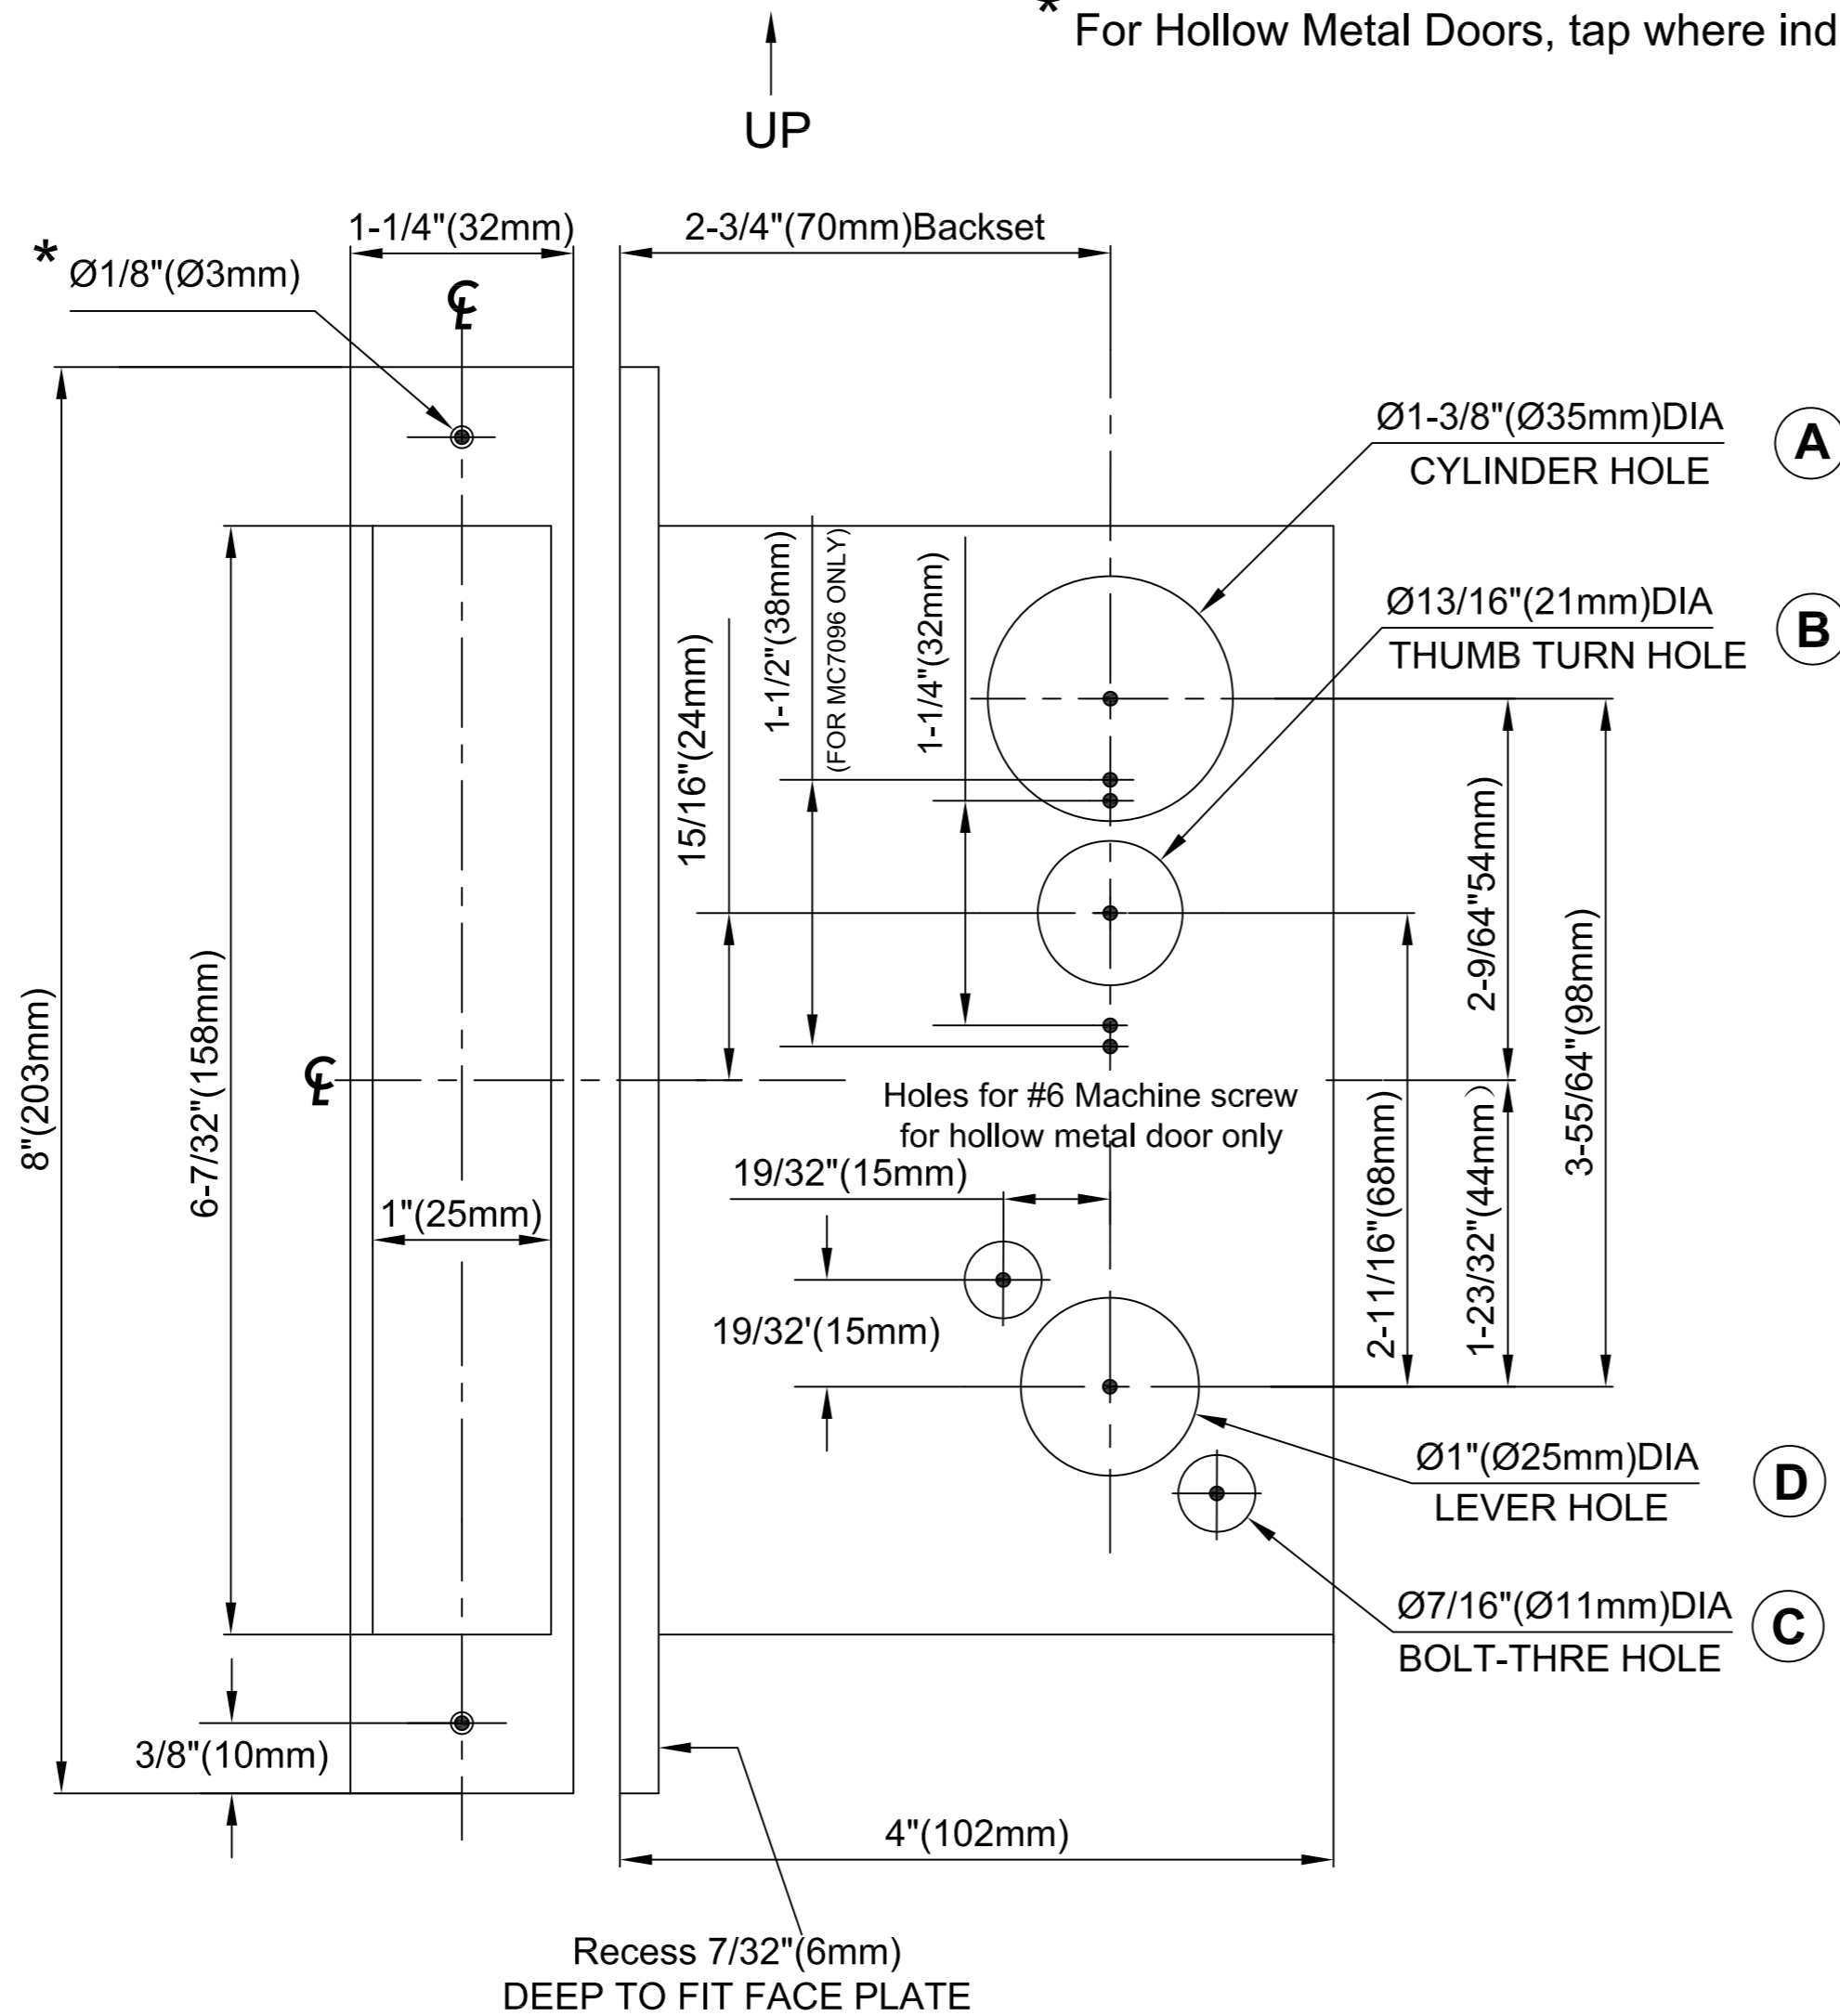

## Door preparation using template supplied.

\*\*\*Make sure the correct lock function, Entry or Privacy or Passage and Drill the necessary holes only.

Function	Item Ref.	Outside Holes				Inside Holes							
		A	B	C	D	A	B	C	D				
Entry	MC7453/7050/ 7438	●		●	●				●				
Storeroom/ Classroom	MC7080/7070	●		●	●				●				
Privacy	MC7040		●		●					●			
Passage	MC7010			●	●								
Privacy w/Coin Turn Indicator	MC7096		●		●					●			
Asylum /Institution Lock	MC7082	●			●								
Storeroom Lock with Deadbolt	MC7480	●			●								●

Dimensions do not provide allowances for door silencers, weather stripping, sound proofing or other additions to door or door frames.

FOR OPPOSITE HAND  
PLEASE SEE REVERSE SIDE

PM-TMMC7000-X43  
V20211222

# Template for XRA/XSE Rose With MC Mortise Lock


Case Size: 4" x 6-7/32" x 1" (102mm x 158mm x 25mm)

Knob or Lever to Cylinder: 3-55/64" (98mm)

Backset: 2-3/4" (70mm)

Lock Front: 1-1/4" x 8" x 15/64" (32mm x 203mm x 6mm)

Knob or Lever to Turn Piece: 2-11/16" (68mm)

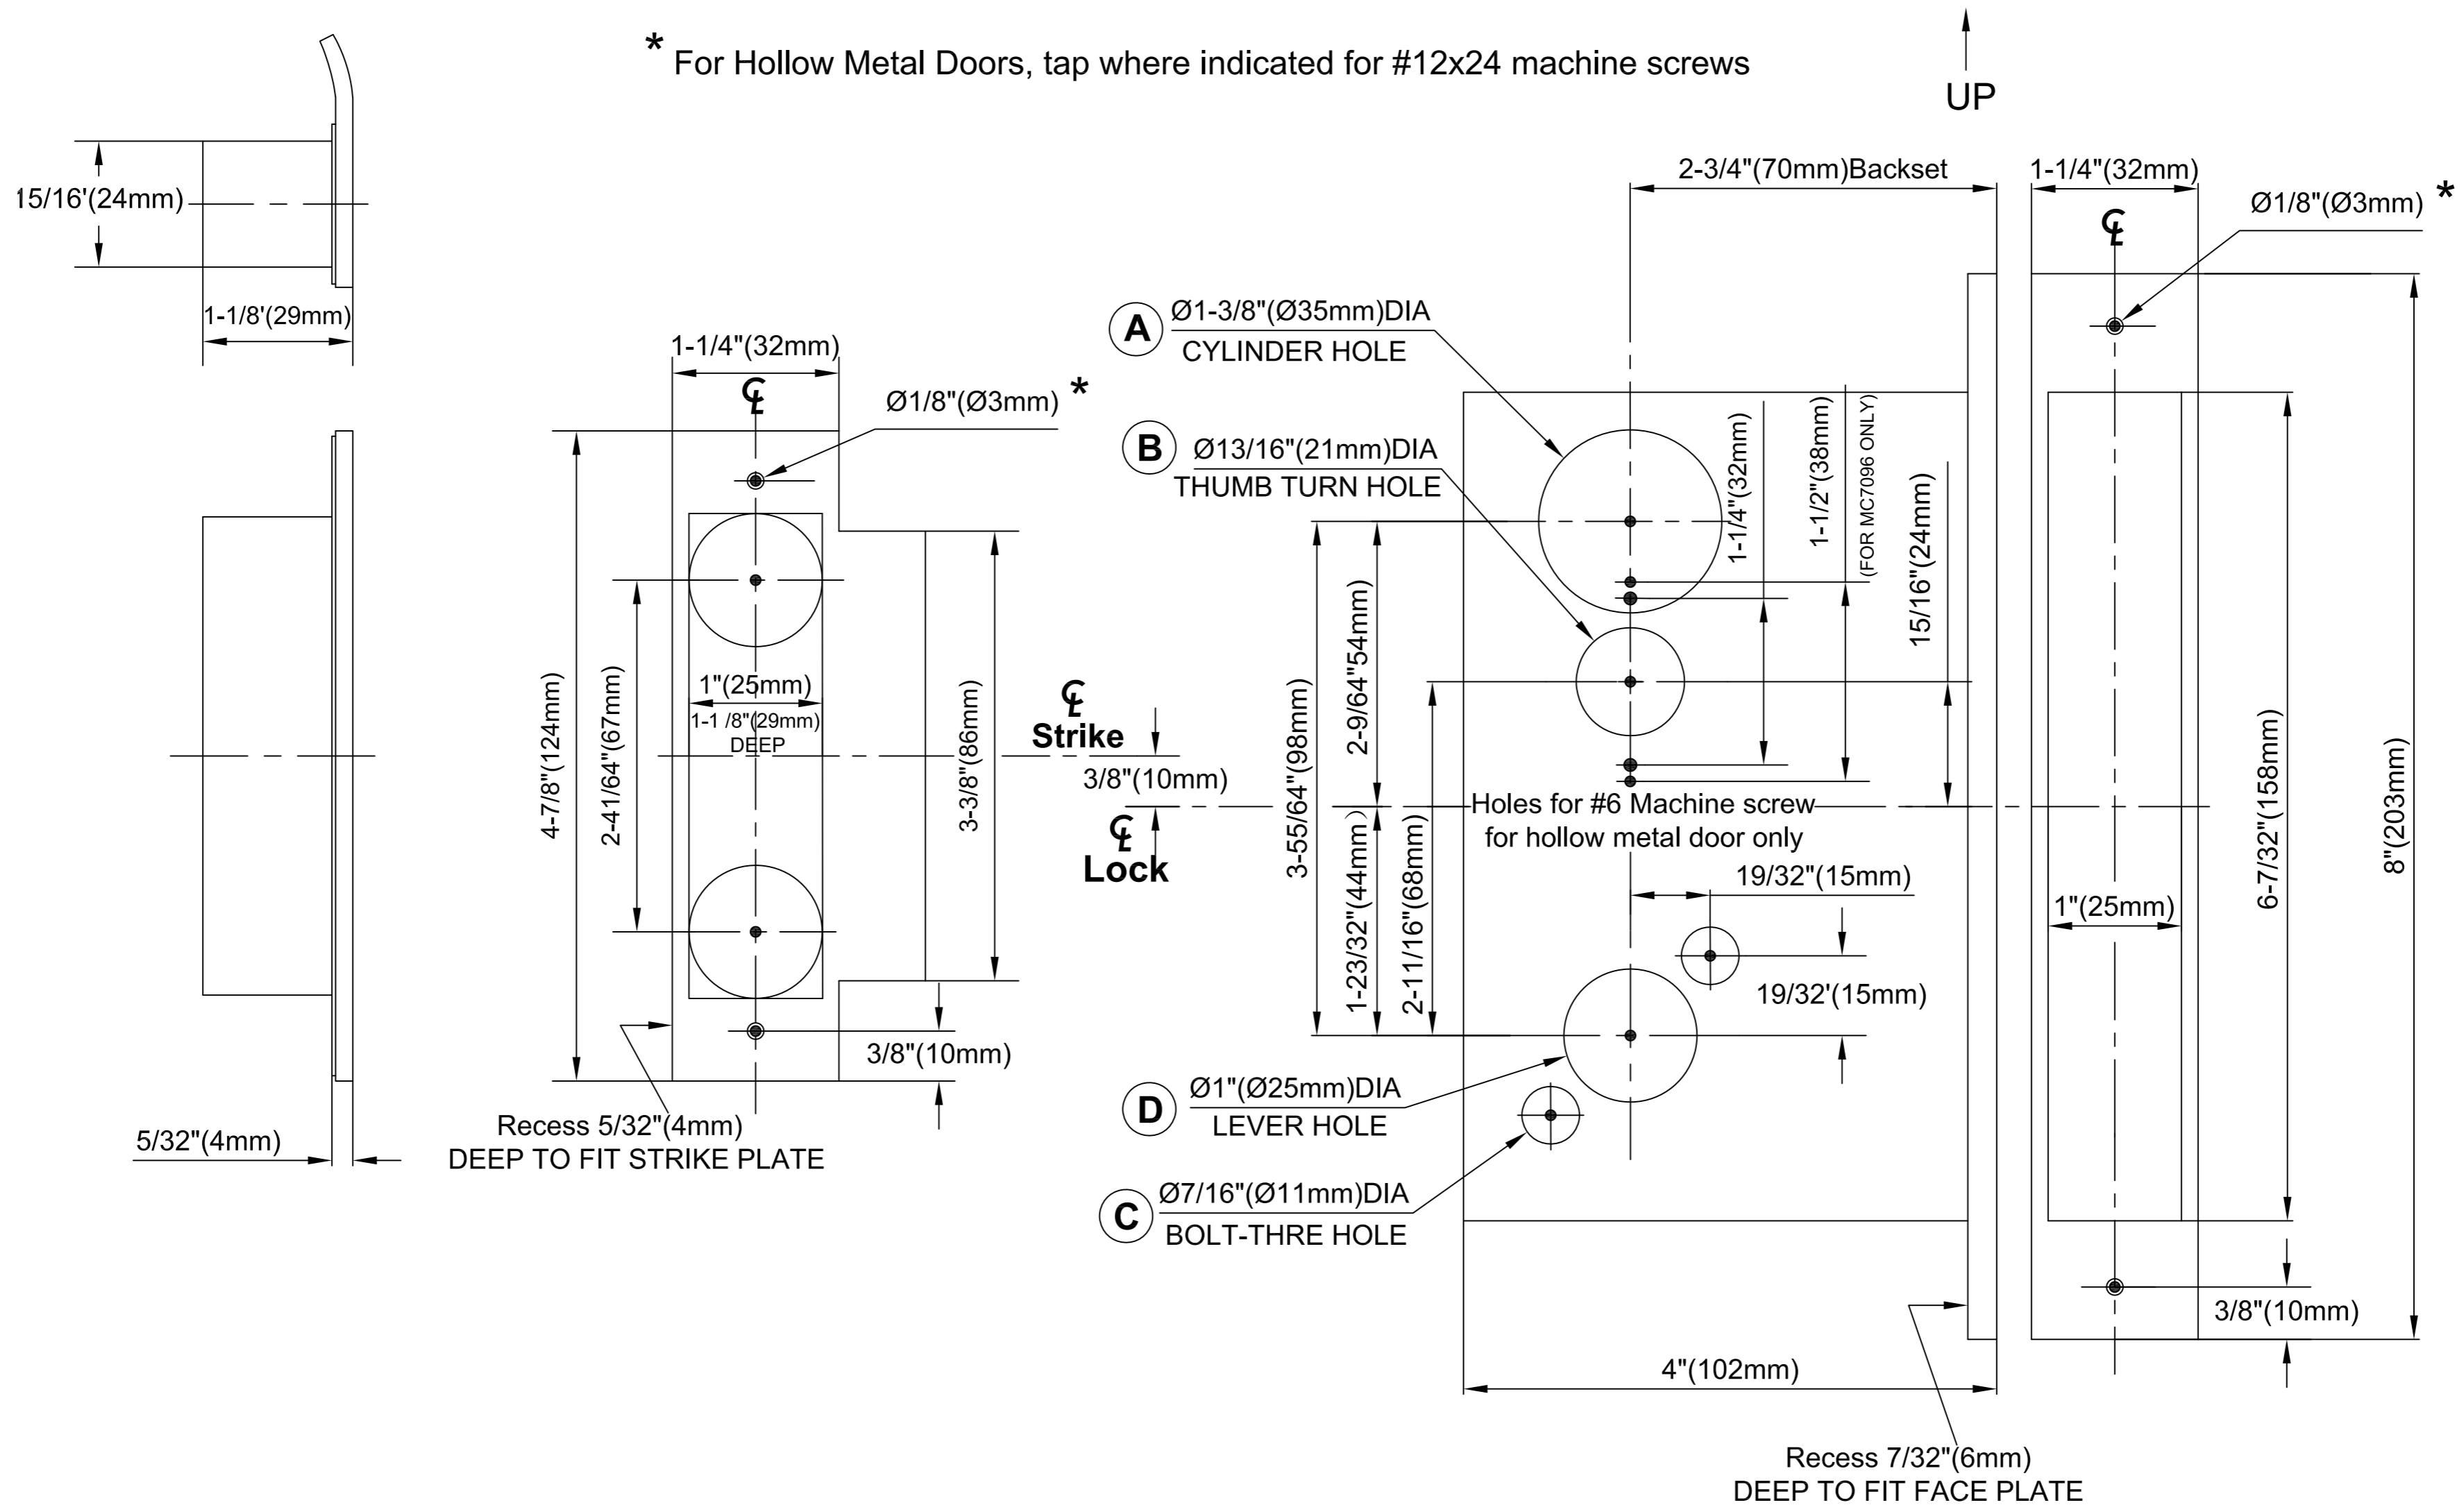

Dimensions do not provide allowances for door silencers, weather stripping, sound proofing or other additions to door or door frames.

FOR OPPOSITE HAND  
PLEASE SEE REVERSE SIDE

PM-TMMC7000-X43  
V20211222