

MEDI+PRODUCTS

Back-Up Power Systems

Standalone Systems (SACS & SSA Series)



System Specifications:



Model Number	Electrical Output (watts)	Surge Output (watts)	Battery Capacity (amp hours)	Waveform	Height	Weight (lbs)
SACS1210T	1250	2500	100	Modified	16.25	160
SACS1220T	1250	2500	200	Modified	24.00	260
SACS1230T	1250	2500	300	Modified	35.75	350
SACS1240T	1250	2500	400	Modified	43.50	430
SACS2020T	2000	4000	200	Modified	43.00	300
SACS2030T	2000	4000	300	Modified	54.50	380
SACS2040T	2000	4000	400	Modified	62.25	460
SACS2060T	2000	4000	600	Modified	77.75	630
SACS2080T	2000	4000	800	Modified	93.25	800
SACS3120M	3100	6000	200	Modified	43.00	300
SACS3130M	3100	6000	300	Modified	54.25	380
SACS3140M	3100	6000	400	Modified	62.25	460
SACS3160M	3100	6200	600	Modified	77.75	630
SACS3180M	3100	6000	800	Modified	93.25	800
SACS4020MS	4000	8000	200	Pure	43.00	300
SACS4060MS	4000	8000	600	Pure	77.75	630
SACS4440MS	4400	8800	400	Pure	62.25	460
SACS4480MS	4400	8800	800	Pure	93.25	800
SSA1210T	1250	2500	100	Modified	16.25	160
SSA1220T	1250	2500	200	Modified	24.00	260
SSA1230T	1250	2500	300	Modified	35.75	350
SSA1240T	1250	2500	400	Modified	43.50	430
SSA2020T	2000	4000	200	Modified	43.00	300
SSA2030T	2000	4000	300	Modified	54.50	380
SSA2040T	2000	4000	400	Modified	62.25	460
SSA2060T	2000	4000	600	Modified	77.75	630
SSA2080T	2000	4000	800	Modified	93.25	800
SSA3120M	3100	6000	200	Modified	43.00	300
SSA3130M	3100	6000	300	Modified	54.25	380
SSA3140M	3100	6000	400	Modified	62.25	460
SSA3160M	3100	6200	600	Modified	77.75	630
SSA3180M	3100	6000	800	Modified	93.25	800
SSA4020MS	4000	8000	200	Pure	43.00	300
SSA4060MS	4000	8000	600	Pure	77.75	630
SSA4440MS	4400	8800	400	Pure	62.25	460
SSA4480MS	4400	8800	800	Pure	93.25	800

MEDI+PRODUCTS

Back-Up Power Systems

Standalone Systems (SACS & SSA Series)


Dimensions:

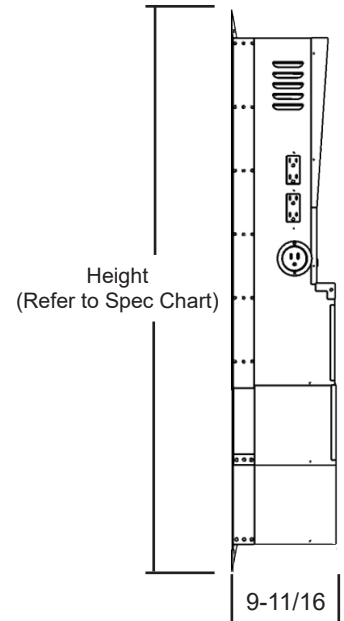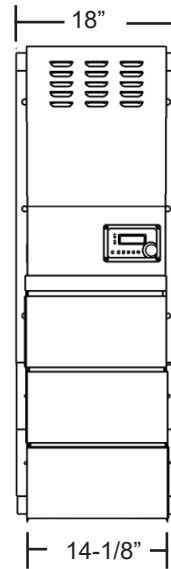

Options and Features:



Optional Power Outage Alert System
This power outage alert system signals when the input power is lost. Allowing the user time to move the cold stored products during an extended outage.



Plug & Play
Unit also includes 4 standard wall outlets and a standard 15 amp plug for recharging.

Electrical Input/Output Power:

System Wattage	Input Voltage	Input Plug NEMA	Output Outlets Qty & NEMA
1200	120	15 amp NEMA 5-15	1 Duplex 15 amp
2000	120	15 amp NEMA 5-15	2 Duplex 15 amp
3100	120	20 amp NEMA 5-20	2 Duplex 15 amp
4000	120	20 amp or Specify	2 Duplex 20 Amp or Specify
4400	120	20 amp or Specify	2 Duplex 20 Amp or Specify