PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE,FRONT,CUSTOM
19,500 Lb TAK-4 Axle

AXLE,REAR
27,000 Lb Meritor Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
1000 Gallon New York Style Water Tank

COMPT,PUMPER,REAR
30.75" FF RollUp Rear Compt

COMPT,PUMPER,LEFT SIDE
161" Lap (3) Liftup

COMPT,PUMPER,RIGHT SIDE
161" Lap Low

FIRE SUPPRESSION

PUMPHOUSE
45° Control Zone Side Mount

PUMP
1250 GPM Waterous CSU

CROSSLAYS,1.50"
1.50" Crosslays Not Required

CROSSLAYS,2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

Foam System
Foam System Not Required

Foam Cell
Foam Cell Not Required

Side Roll and Frontal Impact Protection

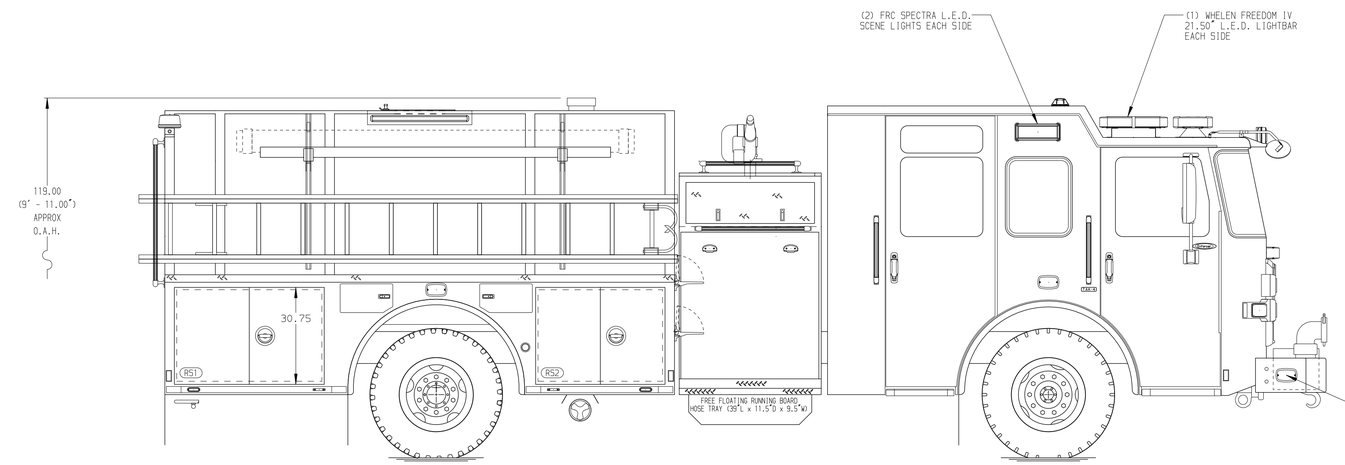

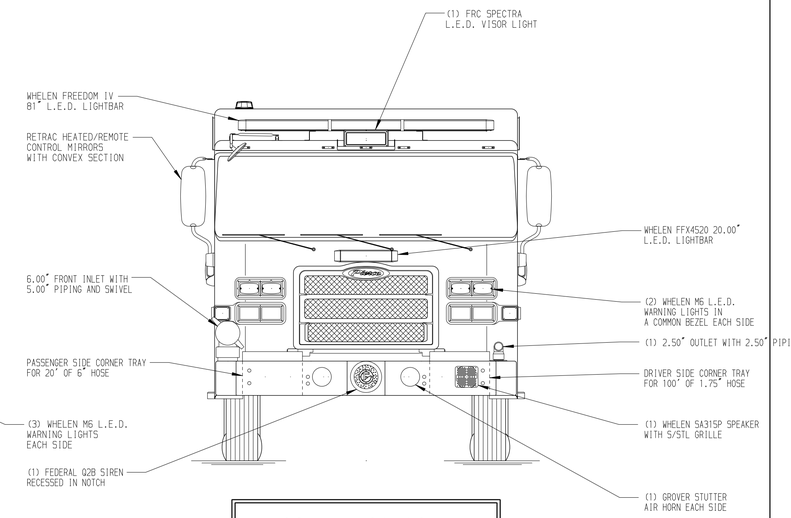

HOSEBED CAPACITY

BED 1
200' OF 1.75" D.J. POLY HOSE

BED 2
200' OF 2.50" D.J. POLY HOSE

BED 3
1000' OF 4.00" D.J. POLY HOSE

BED 4
500' OF 3.00" D.J. POLY HOSE

BED 5
200' OF 1.75" D.J. POLY HOSE

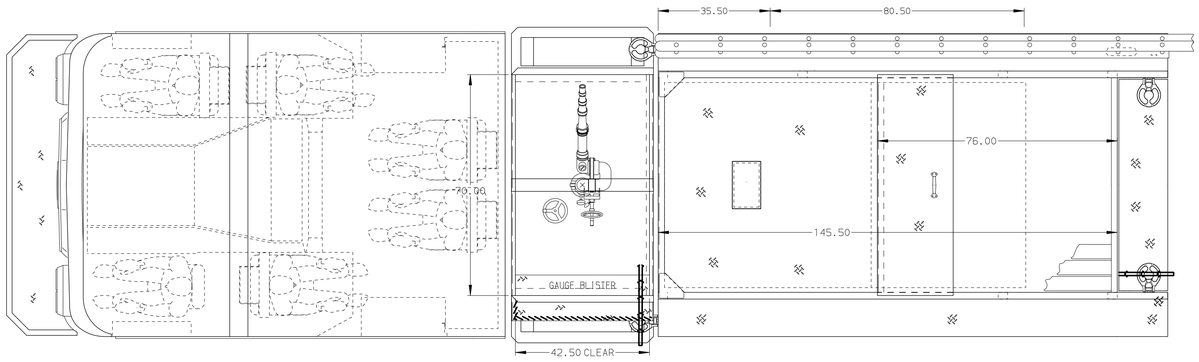

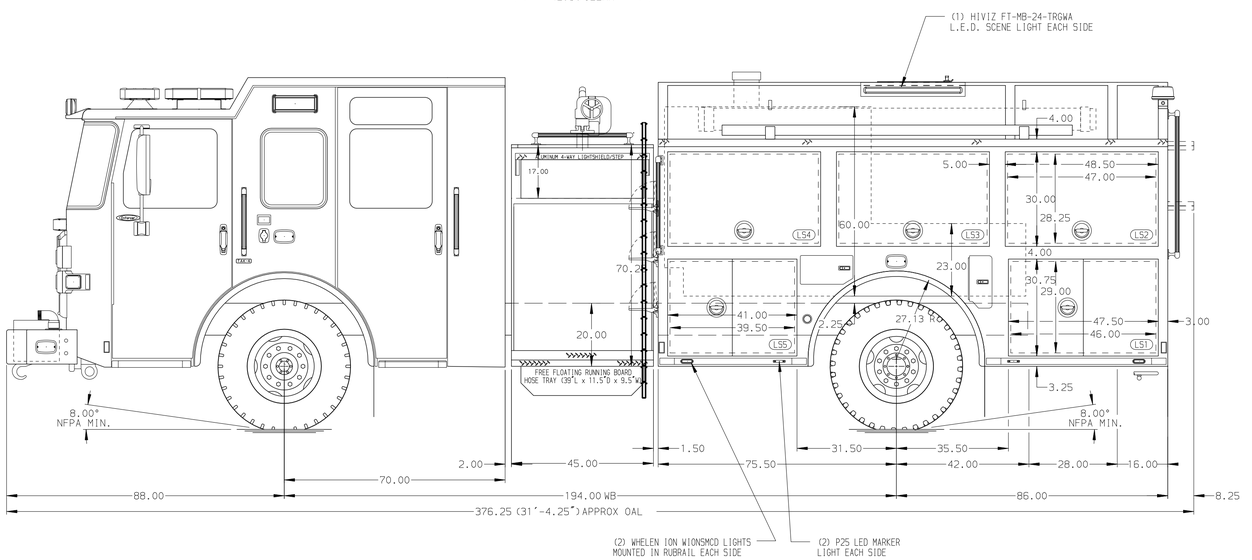

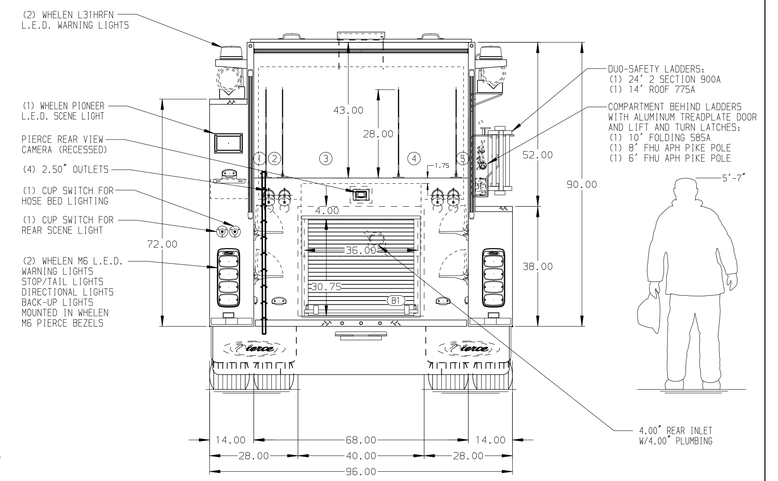

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
3. BATTERY CHARGER LOCATED BEHIND PASSENGERS SEAT
4. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE OF THE CAB
5. TWO ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
7. PARTITIONS BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
8. ONSPOT AUTOMATIC TIRE CHAINS

REV	DATE	BY	CH
V	12NOV20	MMF	PPE
V	09SEP20	MMF	PPE
V	29JUL20	MMF	PPE

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
-
FOR: Fallston Volunteer Fire and Ambulance Company
-
DWG NO.: 35223AD

JOB NO.: 35223
SCALE: 1:24
DATE
DRAWN BY: MMF — 23MAR20
CHECKED BY: NPE — 24MAR20
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 12-NOV-2020 08:57:21