

The antenna AD-21/3108 is a wideband low-profile monopole mobile antenna covering frequency range from 30 to 108 MHz and is intended for use with portable and mobile radios. The antenna radiator is composed of two parts: the whip made of special strong and flexible stainless steel whip with spring at the bottom and the matching transformer unit above the N male coaxial connector. The radiator and the matching unit are painted with UV protective polyurethane black paint.

The antenna radiator could be used as a separate antenna attached to the portable radio device or it can be used with the magnet base ADM-21/N or fixed base ADN-21/N, both with the integrated coaxial cable length of 4 meters and ended with the FME female connector. Various adapters from FME to N, BNC, UHF, SMA, etc. are available on request.

VERSIONS:

AD-21/3108-N: wideband monopole antenna for portable radio devices with N male connector

AD-21/3108-F: antenna **AD-21/3108-N** with the fixed mount **ADN-21/N** for mobile applications

AD-21/3108-M: antenna **AD-21/3108-N** with the magnet mount **ADM-21/N** for mobile applications


| | |
|--------------------|---------------------|
| Frequency range | 30-108 Mhz |
| Impedance | 50 ohm |
| VSWR | < 3.5 (see diagram) |
| Max. power | 50 W CW |
| Gain | -15 0 dBi |
| Height | 120 cm |
| Radiator Weight | 200 gr. |
| Magnet Base Weight | 850 gr. |
| Fixed Base Weight | 200 gr. |
| Cable length | 4 m |
| Input connector | FME female |






**Fixed mount
ADN-21/N**



**Magnet mount
ADM-21/N**

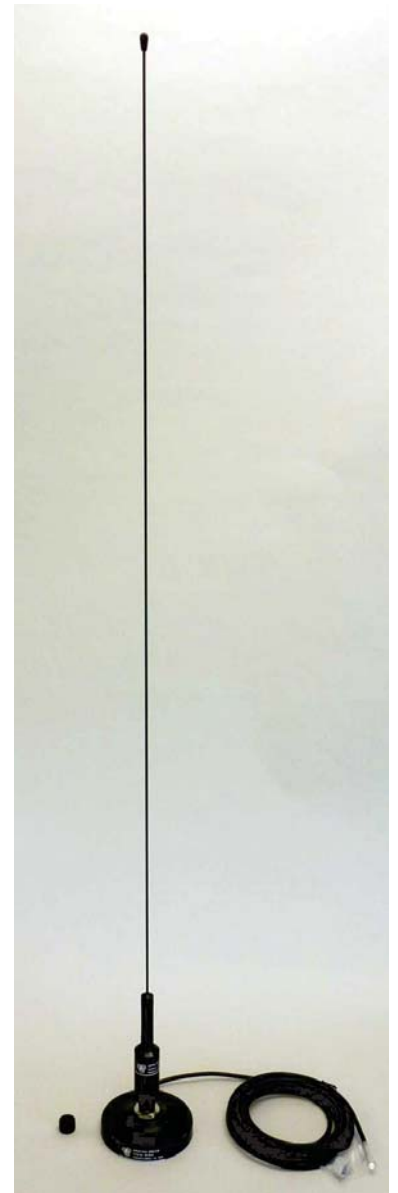

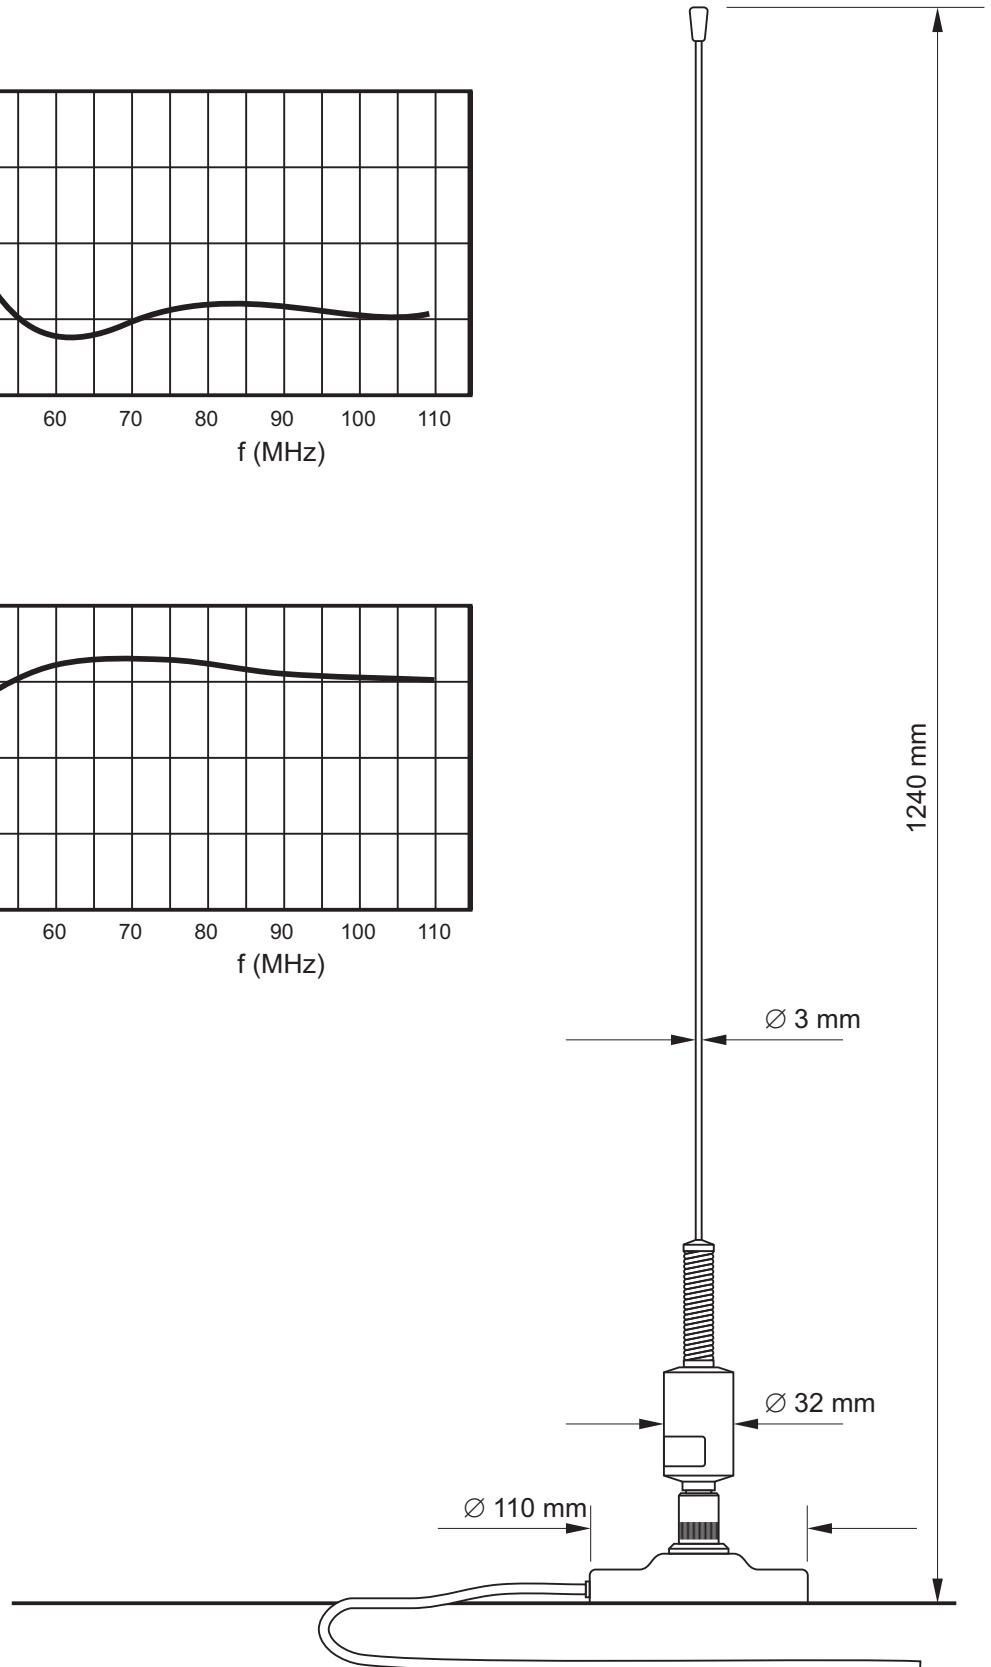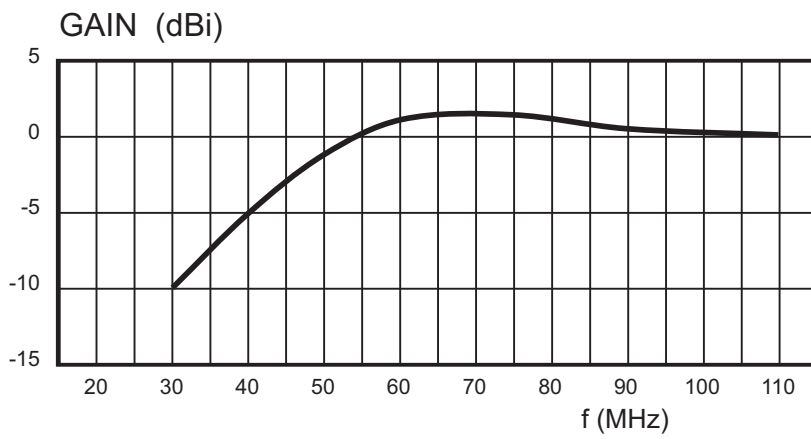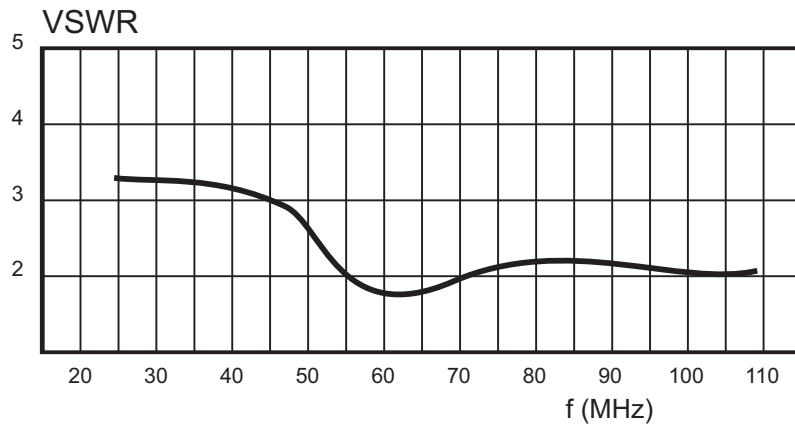

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned