

### VERSION: 3.5





### **PRODUCT FEATURES:**

- Man-portable HF antenna •
- Significant directive gain
- Low VSWR across a wideband

#### **APPLICATION AREAS:**

PAGE 1 of 3

- Portable communication ٠
- Long range HF transmission •
- Any HF application

# Man-Portable HF Directional Antenna

1.5 – 30 MHz

## Product Code: TW-A0002

### SPECIFICATIONS:

Electrical: DF	
Frequency range	1.5 – 30 MHz
Polarisation	Vertical
Nominal input impedance	50 Ω
VSWR	< 2.5:1
Gain	See graph
Power handling	1 kW average, 4 kW PEP
Mechanical:	
Dimensions (deployed)	100 m x 2 m x 10 m high
Groundplane diameter	40000 mm
Dimensions (packed)	Crate 1: 1450 x 400 x 300 mm 52 kg (32 kg) Crate 2: 2240 x 402 x 220 mm 33 kg (3 kg)
Mass (antenna)	< 15 kg (excludes packaging, and mast)
Total mass (packed)	< 90 kg
Environmental: designed to meet the following specifications	
Wind survival	160 km/h (without ice)
Temperature range	-30 ºC - +70 ºC
Water resistance	IP 65
Vibration and shock	MIL-STD-810F

#### **PRODUCT DESCRIPTION:**

The TW-A0002 is a man-portable tactical HF directional antenna system designed for rapid deployment in the field. It is ideal for highpower and long-range HF communications.

The antenna system consists of a multi-wire travelling-wave antenna that gives good directivity throughout the frequency range.

The TW-A0002 can be connected directly to 50 ohm transmitters without the need for an antenna matching unit. The VSWR is below 2.5:1 over the entire frequency range from 1.5 to 30 MHz and the antenna is rated for a transmitter power of 1 kW continuous (4 kW PEP). The TW-A0002 can be deployed by two persons in less than 60 minutes including the mast.

GAIN THE DVANTAGE



AUTHORIZED USA **DISTRIBUTION BY:** Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675




# **Man-Portable HF Directional Antenna**

## 1.5 – 30 MHz

# Product Code: TW-A0002

## GAIN:

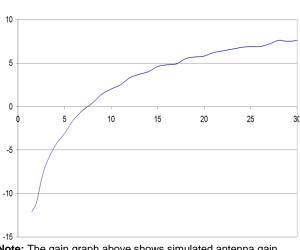

**Note:** The gain graph above shows simulated antenna gain over "average" ground with conductivity of 0.005 S/m and relative permittivity 13 and takes into account ground losses as well as resistive losses in the antenna.

**Tolerance:** The tolerance of this graph is as follows:

> 5 MHz:  $\pm 6$  dB of graph

< 5 MHz: ± 9 dB of graph

**ELEVATION PATTERNS:** 


#### 1.9 1.8 1.7 16 VSWR 1.5 1.4 1.3 1.2 1.1 1 º 0 5 25 15 20 10 Frequency (MHz) \_\_\_\_L1: f=1.5, φ=0 — — L2: f=3, φ=0 ---L3: f=6, φ=0 -----L4: f=10, φ=0 -L5: f=20, φ=0

VERSION: 3.5

30

### AZIM


– L6: f=30, φ=0

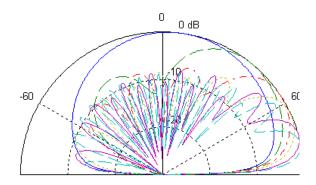

## AZIMUTH PATTERNS:


VSWR:

2

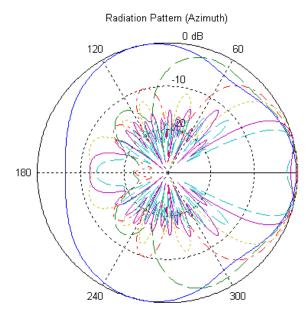







Updated: 2018-01-09


PAGE 2 of 3

# **Man-Portable HF Directional Antenna**

1.5 – 30 MHz

Product Code: TW-A0002

PRODUCT LAYOUT:

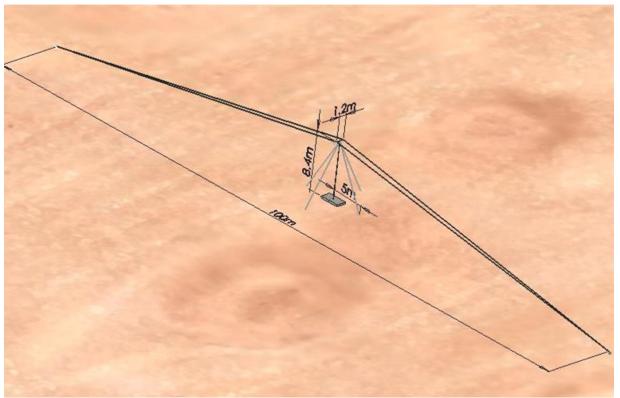


The dimensions of the antenna can be seen above.



AUTHORIZED USA DISTRIBUTION BY: Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675





VERSION: 3.5