



Finishes You've Never Seen Before®

# 7/8" CORRUGATED

7/8" Corrugated Metal Roofing & Wall Panels Have Deep Wavy Corrugations.

Available Materials: Aluminum, Copper, Corten/A606-4, Steel

Available Finishes: Bare Steel, Galvalume®/Zincalume®, Galvanized, Kynar®/PVDF, SMP Painted

## SPECIFICATIONS:

|                                 |   |
|---------------------------------|---|
| Profile Type:                   | 7/8" Corrugated   |
| Rib Height:                     | 7/8"  |
| Rib Distance (Pitch):           | 2.67" Pitch   |
| Overall Width:                  | 39"   |
| Coil Feed:                      | 48"   |
| Warranty:                       | Sold AS IS – No Warranty  |
| Coverage Area                   |   |
| Roof:                           | 34.67"  |
| Wall:                           | 37"   |
| Available Gauges:               | 26, 24, 22, 20  |
| Substrate:                      | Bare Steel  |
| Finish:                         | Bare Steel  |
| Fasteners:                      | Exposed   |
| Panel Length:                   | 1' to 52'   |
| Recommended Minimum Roof Slope: | 3/12  |
| Installation:                   | Can be installed over an open purlin system or a solid substrate. Use bead mastic on the overlap if used for a roofing application. |

## TESTING AND APPROVALS:

- UL 2218A Impact Resistance – Class 4
- UL 790 Fire Resistance Rating – Class A, per building code

## APPLIES TO THE FOLLOWING COLORS/FINISHES:

- Bare Steel

\*\*\*Material does not arrive pre-rusted. Panel will rust naturally with exposure to the weather. Use galvanized or stainless steel screws with a painted brown screw head for installing the panels.




Shown in Bare Steel

## PROFILE:

### 7/8" Corrugated

39" Out-To-Out

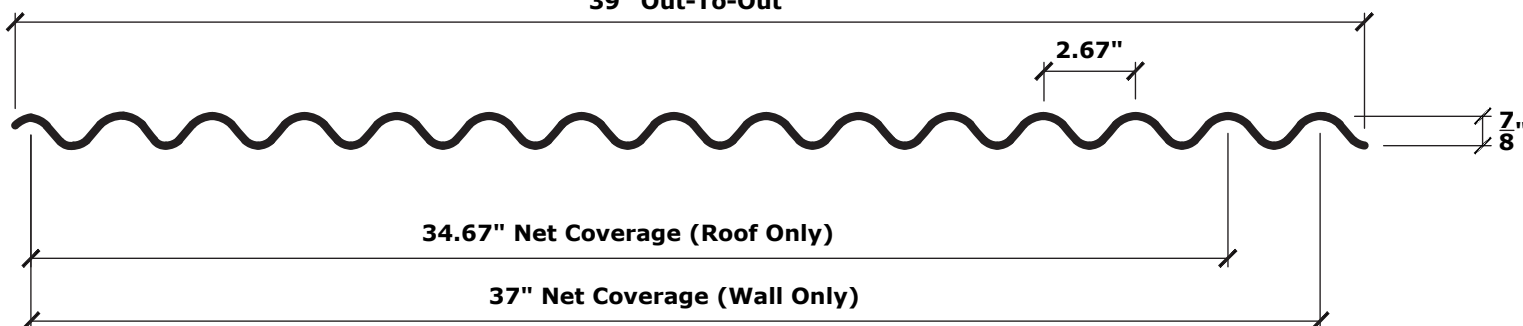

\*\*\*There can be variance in the overall width of up to 1". This will NOT lessen roof/wall coverage.

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.